



More Precision

thermoMETER
Non-contact IR temperature sensors



Precise temperature measurement with thermoMETER from Micro-Epsilon

Quick start

| | |
|--------------------|------------|
| At a glance | pg 4 - 5 |
| CTratio | pg 6 - 7 |
| CTlaser | pg 8 - 23 |
| CT | pg 24 - 45 |
| IR sensors for OEM | pg 46 - 57 |
| Handhelds | pg 58 - 61 |

Most precise temperature measurement with thermoMETER

Micro-Epsilon presents an innovative range of infrared sensors and imaging systems especially created for industrial applications in maintenance, process monitoring and R&D. The state of the art IR sensors offer measuring ranges from -50°C up to 2200°C. The non-contact method allows you to measure wear-free and most reliable.

Wide range of applications

IR temperature sensors and IR cameras are used in a variety of applications within any industry from R&D to production and process monitoring.

Precise and stable measurements

Micro-Epsilon's diversity of spectral ranges from 0.7µm to 14µm results in a stable and accurate temperature reading regardless of the application challenge.


Proven technology

Infrared sensors developed and produced by Micro-Epsilon are the most durable, robust and reliable with an extreme long life expectancy. Cutting edge technology and continuous improvement in the design, results in IR sensor performances which are unrivaled. Sensors operate in 250°C environment without cooling, survive 50g acceleration and read with a NEDT resolution of 25 milli Kelvin.

Compact sensor design

For restricted spaces or complete integration the Micro-Epsilon IR sensors represent the most compact size in its class. Special models offer integrated miniaturised signal process electronics for maximum compactness.



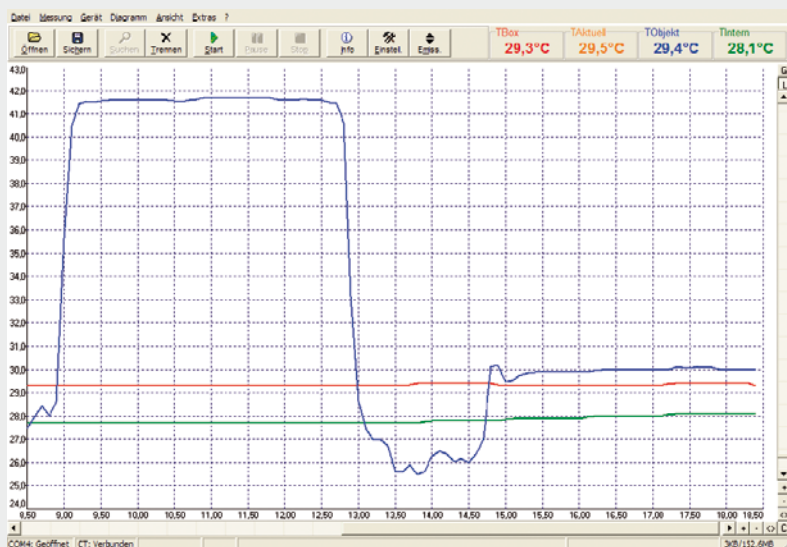

Software (included free of charge)

With any thermoMETER sensor that has a digital interface option the compactCONNECT software is included for free.


- Display, graphic charting and recording of temperature readings
- Easy system configuration and sensor calibration
- Sophisticated signal processing features
- Programming of input and output channels

System requirements

- Windows XP, Windows 2000
- USB 2.0
- Hard disc min. 30 MByte
- min. 128 MByte RAM
- CD-ROM drive


Non-contact measurement of the surface temperature

Each Micro-Epsilon IR temperature sensor model incorporates state of the art technology to achieve one goal: Non-contact and accurate temperature measurement. With this method we can offer a precise, wear free and fully non contact temperature reading without any physical effect or impact on the target.




Wide temperature range

IR Sensors made by Micro-Epsilon cover a huge span of temperature readings. Starting as low as -50°C in cooling processes or labs and measuring up to 2200°C on molten metals, these sensors measure precise and fast within the blink of an eye.



For fast measurement events


Temperature of moving objects and fast events can be captured with the Micro-Epsilon IR sensors which offer the fastest thermopile detector with an exposure <6ms or photon detectors with a response time of 1ms. Even the IR imager takes real time frames every 10ms.



thermoMETER optics

There are several different lenses available for the various series. The lenses are basically differentiated by the ratio of the distance of the measuring object to the diameter of the measuring spot.

SF Lenses (Standard Focus) have an almost linear ratio while the CF Lenses (Close Focus) have a smaller measuring spot in distances close to the sensor. FF Lenses (Far Focus) offer a small spot even at large distances.

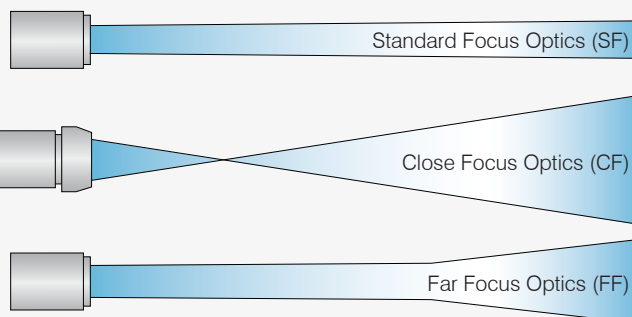

Selectable target distance and spot size

Depending on the application, one can choose the ideal distance from the sensor to the target. Due to the many different optics offered, very small spot sizes, even at large distances are possible.

Smallest spot-diameter for tiny targets

Common IR sensors on the market can not measure temperature of tiny small parts such as leads of ICs, small hot spots on circuit boards, fibre strands etc. Micro-Epsilon offers the most sophisticated optics for the IR sensors to measure with the world's smallest spot sizes < 1mm.

High-Performance IR sensor with double laser sighting



| page | model | temperature range |
|---------|--------------------|-------------------|
| 6 - 7 | CTratioM1 | 600°C - 1800°C |
| 8 - 9 | CTLaser | 0°C - 900°C |
| 10 - 11 | CTLaserFAST | 0°C - 900°C |
| 12 - 13 | CTLaserGLASS | 200°C - 1600°C |
| 14 - 15 | CTLaserM1/M2 | 200°C - 2200°C |
| 16 - 17 | CTLaserM3 | 100°C - 1800°C |
| 18 - 19 | CTLaserM5 | 1000°C - 2000°C |
| 20 - 21 | CTLaser COMBUSTION | 200°C - 1400°C |

Infrared sensor for general purpose applications



| page | model | temperature range |
|---------|---------|-------------------|
| 24 - 25 | CT | 0°C - 900°C |
| 26 - 27 | CTfast | 0°C - 900°C |
| 28 - 29 | CThot | 0°C - 900°C |
| 30 - 31 | CTM1/M2 | 200°C - 2200°C |
| 32 - 33 | CTM3 | 100°C - 1800°C |
| 34 - 35 | CTM3-XL | 100°C - 1800°C |
| 36 - 37 | CTP7 | 0°C - 400°C |
| 38 - 39 | CTtrans | 0°C - 900°C |
| 40 - 41 | CTex | 0°C - 900°C |

Compact infrared temperature sensor for OEM applications



| page | model | temperature range |
|---------|------------|-------------------|
| 46 - 47 | CSLaser | 0°C - 1600°C |
| 48 - 49 | CS | 0°C - 400°C |
| 50 - 51 | CSmicro | 0°C - 1000°C |
| 52 - 53 | CSmicro 2W | 0°C - 1600°C |
| 54 - 55 | CX | 0°C - 900°C |



Handheld devices

| page | model | temperature range |
|---------|-------|-------------------|
| 58 - 59 | LS | 0°C - 900°C |
| 60 - 61 | MS | 0°C - 700°C |

High-Performance IR sensor with double laser sighting

| spectral range | ambient temperature | characteristics | model | page |
|---------------------------|---------------------|---|-----------------------|---------|
| 0.7 - 1.1 μ m | -20 °C ... +250°C | Two colour radiometric pyrometer for extreme applications | CTRatioM1 | 6 - 7 |
| 8 - 14 μ m | -20 °C ... +85°C | High performance IR temperature sensor with laser marking | CTLaser | 8 - 9 |
| 8 - 14 μ m | -20 °C ... +85°C | High speed IR temperature sensor with laser marking | CTLaserFAST | 10 - 11 |
| 5.0 μ m | -20 °C ... +85°C | High performance IR temperature sensor with laser marking for glass targets | CTLaserGLASS | 12 - 13 |
| 1 μ m / 1.6 μ m | -20 °C ... +85°C | IR temperature sensor with laser marking for metal, ceramic & shiny targets | CTLaserM1/M2 | 14 - 15 |
| 2.3 μ m | -20 °C ... +85°C | High performance IR sensor with laser marking for metal & composite targets | CTLaserM3 | 16 - 17 |
| 0.525 μ m | -20 °C ... +85°C | High performance IR sensor with laser marking for liquid metals | CTLaserM5 | 18 - 19 |
| 3.9 / 4.24 / 4.64 μ m | -20 °C ... +85°C | High performance IR sensor with laser marking for measurement of flames | CTLaser COMBUSTION | 20 - 21 |

Infrared sensor for general purpose applications

| spectral range | ambient temperature | characteristics | model | page |
|-------------------------|---------------------|--|---------|---------|
| 8 - 14 μ m | -20 °C ... +180°C | Economic non contact IR temperature sensors for accurate readings | CT | 24 - 25 |
| 8 - 14 μ m | -20 °C ... +120°C | Fastest Economic Non contact IR- temperature sensors for accurate readings | CTfast | 26 - 27 |
| 8 - 14 μ m | -20 °C ... +250°C | Non contact IR- temperature sensors for extreme hot environment | CThot | 28 - 29 |
| 1 μ m / 1.6 μ m | -20 °C ... +125°C | Economic IR-sensors for accurate readings on metals & shiny targets | CTM1/M2 | 30 - 31 |
| 2.3 μ m | -40 °C ... +85°C | IR-temperature sensors for accurate readings on metals & composite materials | CTM3 | 32 - 33 |
| 2.3 μ m | -40 °C ... +85°C | Precision IR temperature sensors with special laser filter | CTM3-XL | 34 - 35 |
| 7.9 μ m | -20 °C ... +85°C | Economic IR- temperature sensors for measurement of plastics | CTP7 | 36 - 37 |
| 8 - 14 μ m | -20 °C ... +100°C | Mobile measuring system for thermal material analysis | CTtrans | 38 - 39 |
| 8 - 14 μ m | -20 °C ... +60°C | Conversion kit for applications in hazardous EX environment | CTex | 40 - 41 |

Compact infrared temperature sensor for OEM applications

| spectral range | ambient temperature | characteristics | model | page |
|------------------------------|---------------------|---|------------|---------|
| 1.6 μ m / 8 - 14 μ m | -20 °C ... +85°C | Two-wire infrared thermometer with laser marking & integrated electronics | CSLaser | 46 - 47 |
| 8 - 14 μ m | -20 °C ... +80°C | Compact Non Contact IR- temperature sensors with integrated electronics | CS | 48 - 49 |
| 8 - 14 μ m | -20 °C ... +120°C | The Most Compact Non Contact IR- temperature sensors | CSmicro | 50 - 51 |
| 1.6 μ m / 8 - 14 μ m | -20 °C ... +180°C | Compact Non Contact Two-wire IR- temperature sensors | CSmicro 2W | 52 - 53 |
| 8 - 14 μ m | -20 °C ... +75°C | Self contained precision Non Contact IR- temperature sensor | CX | 54 - 55 |

Handheld devices

| spectral range | ambient temperature | characteristics | model | page |
|----------------|---------------------|---|-------|---------|
| 8 - 14 μ m | 0 ... +50°C | Handheld IR thermometer with true laser crosshair measurement marking | LS | 58 - 59 |
| 8 - 14 μ m | 0 ... +50°C | Handheld non contact Infrared thermometer | MS | 60 - 61 |



thermoMETER CTratioM1


Glass fibre 2 colour ratio thermometer for extreme temperature measurements. The ratiometric principle minimises measurement errors caused by intensity change (e.g. contamination due to dust, fumes..), low emissivity and partial spot size coverage of the target.

- Temperature range from 700°C to 1800°C
- 5ms response time for fast readings
- Short wave length 0.7 and 1.1µm
- Rugged sensor head withstands 250°C without cooling
- High optical resolution
- Laser target marker down to 1.3mm spot size
- Programmable 1 or 2 colour mode
- Separate controller with easy accessible programming keys and multi colour LCD backlit display

Optical specification thermoMETER CTratioM1

□ = smallest spot size (mm)

| Standard optics | | | | | | | | | | |
|--------------------|-----------------------|-----|------|------|------|------|------|-------|------|------|
| SF40 optics | 40:1 | 6.6 | 10.6 | 21.1 | 31.3 | 41.4 | 52 | 62.6 | 73.3 | 84 |
| | <i>distance in mm</i> | 102 | 305 | 762 | 1143 | 1524 | 1905 | 2286 | 2667 | 3048 |
| Close Focus optics | | | | | | | | | | |
| CF02 optics | 2:1 | 5.1 | 6.4 | 7.7 | 23.6 | 50.1 | 77.6 | 104.1 | | |
| | <i>distance in mm</i> | 102 | 200 | 305 | 762 | 1524 | 2286 | 3048 | | |

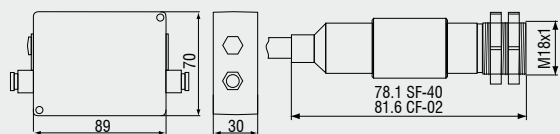

Product identification

CTRM - 1 CF02 - C3

Fibre cable length [3m (standard) / 6 / 10 / 15 / 22m]
 Focus [CF02 / SF40]
 Spectral range
 thermoMETER CTRatio

| Model | CTRM-1CF02-C3 | CTRM-1SF40-C3 |
|---|--|---|
| Optical resolution (95% Energy) | 40:1 | |
| Temperature range | 700°C to 1800°C | |
| Spectral range | 0.7 and 1.1µm | |
| System accuracy ^{1,3} | ±(0.5% of reading + 1°C) | |
| Repeatability ^{1,3} | ±(0.2% of reading + 1°C) | |
| Temperature resolution (>900°C) | 0.1°C | |
| Response time (95% signal) ² | 5ms - 10s | |
| Slope ⁴ | 0.800 to 1.200 | |
| Emissivity ⁴ | 0.100 to 1.100 | |
| Signal processing ⁴ | 1 colour / 2 colour mode; attenuation monitoring / alarms; peak hold, valley hold, average; extended hold function with threshold and hysteresis | |
| Outputs/analogue | 0/4 - 20mA, 0 to 5/10V | |
| Outputs/analogue | optional | relay: 2 x 60VDC/ 42VAC _{eff} ; 0.4A; optically isolated |
| Alarm output | 2 x open - collector (24V / 1A) | |
| Outputs/digital | optional | USB, RS232, RS485, CAN, Profibus DP, Ethernet |
| Output impedances | current output | mA max. 500Ω (with 5 - 36VDC) |
| | voltage output | mV min. 100kΩ load impedance |
| Inputs/outputs digital | 2 programmable in-/ outputs, usable as: Alarm output (open collector output [24V / 1A]) Digital input for triggered signal output and peak hold function | |
| Fibre cable length | 3m (standard), 6m, 10m, 15m, 22m; stainless steel armour, 400µm fibre diameter | |
| Power supply | 8 to 36VDC or USB; max. 200mA | |
| Optical aiming | Laser 650nm, 1mW, ON/OFF via controller or software | |
| Environmental rating | IP 65 (NEMA-4) | |
| Operation temperature | sensor: -20°C to 250°C (70°C if Laser ON); controller: 0°C to 85°C | |
| Storage temperature | sensor: -40°C to 250°C; controller: -40°C to 85°C | |
| Relative humidity | 10 to 95%, non condensing | |
| Vibration | sensor | IEC 68-2-6: 3G, 11-200Hz, any axis |
| Shock | sensor | IEC 68-2-27: 50G, 11ms, any axis |
| Weight | fibre cable with sensor: 375g; controller: 420g | |

¹ E = 1, response time 1s

² with dynamic adaptation at low signal levels

³ ± at ambient temperature 23 ± 5°C

⁴ adjustable via programming keys or software



LASER RADIATION
 DO NOT STARE IN THE BEAM
 CLASS 2 LASER
 EN60825-1:2002
 P ≤ 1mW; λ = 650nm



thermoMETER CTlaser

Innovative precision infrared temperature sensor marking the actual spot size on your measurement target at any distance

- Measuring range from -50°C to 975°C
- Extreme small measurement spot down to 0.9mm
- Real mapping of the actual spot size, with automatic laser protection
- Precision optics (75:1) with different models for a specific focus point
- Up to 85°C ambient temperature without cooling
- Fully programmable instrument for enhanced signal processing and I/O control
- Separate controller with easy accessible programming keys and multi colour LCD backlit display

Optical specifications thermoMETER CTlaser


□ = smallest spot size (mm)

| Standard optics | | | | | | | | | | | | | | | | | |
|--------------------|-------------|----|------|------|------|-----|------|------|------|------|------|------|------|------|------|-----|-----|
| SF75 optics | 75:1 | 20 | 19.5 | 19 | 18.5 | 18 | 17.5 | 17 | 16.5 | 16 | 20.5 | 25 | 34 | 43 | 52 | | |
| distance in mm | | 0 | 150 | 300 | 450 | 600 | 750 | 900 | 1050 | 1200 | 1350 | 1500 | 1800 | 2100 | 2400 | | |
| Close Focus optics | | | | | | | | | | | | | | | | | |
| CF1 optics | 75:1 | 20 | 9 | 5 | 0.9 | 10 | 25 | 40 | 55 | 70 | 85 | 100 | 115 | 130 | 160 | 190 | 220 |
| CF2 optics | 75:1 | 20 | 16 | 14 | 11 | 8 | 1.9 | 9 | 16.5 | 24 | 31 | 38 | 45.5 | 53 | 68 | 82 | 97 |
| CF3 optics | 75:1 | 20 | 17 | 16 | 14 | 11 | 7 | 2.75 | 8.5 | 14 | 19.5 | 25.5 | 31 | 37 | 48 | 60 | 71 |
| CF4 optics | 75:1 | 20 | 19 | 18.5 | 18 | 17 | 15.5 | 14 | 12.5 | 11 | 9 | 7.5 | 5.9 | 9 | 15 | 20 | 26 |
| distance in mm | | 0 | 40 | 50 | 70 | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 600 | 700 | 800 |

Product identification

CTL - SF75 - C3

Cable length [3 m Standard / 8 m / 15 m]
 Focus [SF75 / CF1 / CF2 / CF3 / CF4]
 thermoMETER CTLaser

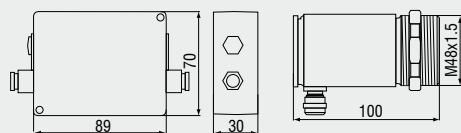

| Model | | CTL-SF75-C3 |
|----------------------------------|------------------------------------|---|
| Optical resolution | | 75:1 |
| Temperature range ¹ | | -50°C to 975°C |
| Spectral range | | 8 to 14μm |
| System accuracy ^{2,3} | | ±1% or ±1°C |
| Repeatability ² | | ±0.5% or ±0.5°C |
| Temperature resolution | | 0.1°C |
| Response time (90% signal) | | 120ms |
| Emissivity/gain ¹ | | 0.100 to 1.100 |
| Transmissivity/gain ¹ | | 0.100 to 1.000 |
| Signal processing ¹ | | peak hold, valley hold, average; extended hold function with threshold and hysteresis |
| Certificate of calibration | | optional |
| <hr/> | | |
| Outputs/analogue | channel 1 channel 2 optional | 0/4 to 20mA, 0 to 5/10V, thermocouple J, K sensor temperature (-20 to 180°C as 0 to 5V or 0 to 10V), alarm output relay: 2 x 60VDC/ 42VAC _{eff} ; 0.4A; optically isolated |
| Alarm output | | open - collector (24V/ 50mA) |
| Outputs/digital | optional | USB, RS232, RS485, CAN, Profibus DP, Ethernet |
| Output impedances | current output | mA max. 500Ω (with 5 to 36VDC) |
| | voltage output | mV min. 100kΩ load impedance; thermocouple 20Ω |
| Inputs | | programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions) |
| Cable length | | 3m (standard), 8m, 15m |
| Power supply | | 8 to 36VDC; max. 160mA |
| Laser | | class II (635nm), 1mW, ON/OFF via controller or software |
| <hr/> | | |
| Environmental rating | | IP 65 (NEMA-4) |
| Ambient temperature | | sensor: -20°C to 85°C (50°C if Laser ON) controller: 0°C to 85°C |
| Storage temperature | | sensor: -40°C to 85°C controller: -40°C to 85°C |
| Relative humidity | | 10 to 95%, non condensing |
| Vibration | sensor | IEC 68-2-6: 3 G, 11 to 200Hz, any axis |
| Shock | sensor | IEC 68-2-27: 50 G, 11ms, any axis |
| Weight | | sensor: 600g; controller: 420g |

¹ adjustable via controller or software

² ± ambient temperature: 23 ±5°C; whichever is greater

³ temperature of the object >0°C

Accessories page 22 - 23

- ▶ Mounting bracket
- ▶ Air purge collar
- ▶ Rail mount adapter for controller
- ▶ Water cooled housing
- ▶ Interface kit
- ▶ Software CompactConnect
- ▶ Certificate of calibration



LASER RADIATION
 DO NOT STARE IN THE BEAM
 CLASS 2 LASER
 EN60825-1:2002
 P≤1mW; λ=630-650nm



thermoMETER CTlaserFAST


Innovative precision high speed infrared temperature sensor marking the actual spot size on your measurement target at any distance with short response time for extreme fast response.

- High speed temperature sensor with precise laser aiming
- Measuring range from -50°C to 975°C
- 9ms response time for fast moving objects or events
- Extreme small measurement spot down to 1.4mm
- Real mapping of the actual spot size, with automatic laser protection
- Precision optics (50:1) with different models for a specific focus point
- Up to 85°C ambient temperature without cooling
- Fully programmable instrument for enhanced signal processing and I/O control
- Separate controller with easy accessible programming keys and multi colour LCD backlit display

Optical specifications thermoMETER CTlaserFAST

□ = smallest spot size (mm)

| Standard optics | | | | | | | | | | | | | | | | |
|-------------------------|----|------|-----|------|-----|------|-----|------|------|------|------|------|------|------|-----|-----|
| SF50 optics 50:1 | 20 | 20.5 | 21 | 21.5 | 22 | 22.5 | 23 | 23.5 | 24 | 29.5 | 35 | 48 | 57 | 68 | | |
| distance in mm | 0 | 150 | 300 | 450 | 600 | 750 | 900 | 1050 | 1200 | 1350 | 1500 | 1800 | 2100 | 2400 | | |
| Close Focus optics | | | | | | | | | | | | | | | | |
| CF1 optics 50:1 | 20 | 10 | 8.5 | 1.4 | 11 | 26 | 41 | 57 | 72 | 60 | 103 | 118 | 133 | 164 | 194 | 225 |
| CF2 optics 50:1 | 20 | 15.5 | 15 | 12 | 9 | 3 | 11 | 19 | 26 | 33 | 42 | 49 | 57 | 72 | 88 | 103 |
| CF3 optics 50:1 | 20 | 16.5 | 16 | 14 | 12 | 8 | 4 | 10 | 16 | 21 | 28 | 33 | 40 | 52 | 64 | 76 |
| CF4 optics 50:1 | 20 | 19.5 | 19 | 18.4 | 18 | 16.5 | 15 | 14 | 13 | 11.5 | 10 | 9 | 12 | 19 | 25 | 32 |
| distance in mm | 0 | 40 | 50 | 70 | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 600 | 700 | 800 |

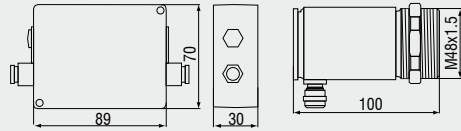

Product identification

CTLF - SF50 - C3

Cable length [3m Standard / 8m / 15m]
Focus [SF50 / CF1 / CF2 / CF3 / CF4]
thermoMETER CTLaserFAST

| Model | | CTLF-SF50-C3 |
|----------------------------------|------------------------------------|--|
| Optical resolution | | 50:1 |
| Temperature range ¹ | | -50°C to 975°C |
| Spectral range | | 8 to 14µm |
| System accuracy ^{2,3} | | ±1.5% or ±1.5°C |
| Repeatability ² | | ±1% or ±1°C |
| Temperature resolution | | 0.5°C |
| Response time (90% signal) | | 9ms |
| Emissivity/gain ¹ | | 0.100 to 1.100 |
| Transmissivity/gain ¹ | | 0.100 to 1.000 |
| Signal processing ¹ | | peak hold, valley hold, average; extended hold function with threshold and hysteresis |
| Certificate of calibration | | optional |
| Outputs/analogue | channel 1 channel 2 optional | 0/4 to 20mA, 0 to 5/10V, thermocouple J, K sensor temperature (-20 to 180°C as 0 to 5V or 0 to 10V), alarm output relay: 2 x 60VDC/ 42VACeff; 0.4A; optically isolated |
| Alarm output | | open - collector (24V/ 50mA) |
| Outputs/digital | optional | USB, RS232, RS485, CAN, Profibus DP, Ethernet |
| Output impedances | current output voltage output | mA max. 500Ω (with 5 to 36VDC) mV min. 100kΩ load impedance; thermocouple 20Ω |
| Inputs | | programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions) |
| Cable length | | 3m (standard), 8m, 15m |
| Power supply | | 8 to 36VDC; max. 160mA |
| Laser | | class II (635nm), 1mW, ON/OFF via controller or software |
| Environmental rating | | IP 65 (NEMA-4) |
| Ambient temperature | | sensor: -20°C to 85°C (50°C if Laser ON) controller: 0°C to 85°C |
| Storage temperature | | sensor: -40°C to 85°C controller: -40°C to 85°C |
| Relative humidity | | 10 to 95%, non condensing |
| Vibration | sensor | IEC 68-2-6: 3 G, 11 to 200Hz, any axis |
| Shock | sensor | IEC 68-2-27: 50 G, 11ms, any axis |
| Weight | | sensor: 600g; controller: 420g |

¹ adjustable via controller or software

² ± ambient temperature: 23 ±5°C; whichever is greater

³ temperature of the object >0°C

Accessories page 22 - 23

- ▶ Mounting bracket
- ▶ Air purge collar
- ▶ Rail mount adapter for controller
- ▶ Water cooled housing
- ▶ Interface kit
- ▶ Software CompactConnect
- ▶ Certificate of calibration



LASER RADIATION
DO NOT STARE IN THE BEAM
CLASS 2 LASER
EN60825-1:2002
P≤1mW; λ=630-650nm



thermoMETER CTlaserGLASS


Innovative precision infrared temperature sensor marking the actual spot size on your measurement target at any distance with 5.0µm wavelength for glass targets

- Measuring range from 100°C to 1650°C
- Accurate glass temperature measurements on flat glass lines, container glass machines, bulb manufacturing, car glass finishing and the production of solar panels
- Cooling and protection accessories for harsh environmental conditions available
- Real mapping of the actual spot size, with automatic laser protection
- Precision optics (45:1 / 70:1) with different models for a specific focus point
- Extreme small measurement spot down to 1mm
- Up to 85°C ambient temperature without cooling
- Fully programmable instrument for enhanced signal processing and I/O control
- Separate controller with easy accessible programming keys and multi colour LCD backlit display

Optical specifications thermoMETER CTlaserGLASS

□ = smallest spot size (mm)

| Standard Focus optics | | | | | | | | | | | | | | | | | |
|-----------------------|-------------|----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| SF45L | 45:1 | 20 | 20.8 | 21.7 | 22.5 | 23.4 | 24.2 | 25 | 25.9 | 27 | 32.5 | 38.4 | 50 | 61.7 | 73.4 | | |
| SF70H | 70:1 | 20 | 19.6 | 19.3 | 19 | 18.5 | 18.2 | 17.8 | 17.4 | 17 | 21.6 | 26.3 | 35.5 | 44.8 | 54 | | |
| distance in mm | | 0 | 150 | 300 | 450 | 600 | 750 | 900 | 1050 | 1200 | 1350 | 1500 | 1800 | 2100 | 2400 | | |
| Close Focus optics | | | | | | | | | | | | | | | | | |
| CF1L | 45:1 | 20 | 9.5 | 7 | 1.6 | 11 | 26.3 | 41.7 | 57 | 72.6 | 88.2 | 104 | 1196 | 135 | 165 | 196 | 227 |
| CF1H | 70:1 | 20 | 9 | 6.5 | 1 | 10 | 25 | 40 | 55 | 70 | 85 | 100 | 115 | 130 | 160 | 190 | 220 |
| CF2L | 45:1 | 20 | 16 | 14.5 | 12 | 9 | 3.4 | 11.2 | 19 | 27 | 35 | 42.5 | 50.3 | 58 | 73.6 | 89.2 | 105 |
| CF2H | 70:1 | 20 | 15.5 | 14 | 11 | 8 | 2.2 | 9.6 | 17 | 24.5 | 42 | 39.2 | 47 | 54 | 69 | 84 | 99 |
| CF3L | 45:1 | 20 | 17 | 16.2 | 14.5 | 12.3 | 8.4 | 4.5 | 10.7 | 16.8 | 23 | 29 | 35 | 41.3 | 53.5 | 65.8 | 78 |
| CF3H | 70:1 | 20 | 16.9 | 16 | 14 | 11 | 7.2 | 2.9 | 8.7 | 14.4 | 20 | 25.6 | 31.2 | 37.3 | 48.7 | 60.2 | 71.6 |
| CF4L | 45:1 | 20 | 19.2 | 19 | 18.6 | 18 | 17 | 15.6 | 14.5 | 13.4 | 12.3 | 11.1 | 10 | 13.4 | 20 | 26.7 | 33.4 |
| CF4H | 70:1 | 20 | 18.9 | 18.5 | 17.8 | 17 | 15.5 | 14 | 12.5 | 11 | 9.5 | 8 | 6.5 | 9.5 | 15.4 | 21.2 | 27.1 |
| distance in mm | | 0 | 40 | 50 | 70 | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 600 | 700 | 800 |



Product identification

CTLG - SF45L - C3

Cable length [3m Standard / 8m / 15m]
 Focus [SF45L/ SF70H / CF1L/H / CF2L/H / CF3L/H / CF4L/H]
 thermoMETER CTLaserGLASS

| Model | CTLG-SF45L-C3 | CTLGF-SF45H-C3 | CTLG-SF70H-C3 | CTLGF-SF45H1-C3 |
|----------------------------------|---|--|---------------|-----------------|
| Optical resolution | 45:1 | | 70:1 | 45:1 |
| Temperature range ¹ | 100 to 1200°C | 200 to 1450°C | 250 to 1650°C | 400 to 1650°C |
| Spectral range | 5.0µm | | | |
| System accuracy ² | ±1% or ±1.5°C | | | |
| Repeatability ² | ±0.5% or ±0.5°C | | | |
| Temperature resolution | 0.1°C | | | |
| Response time (90% signal) | 120ms | 10ms | 80ms | 10ms |
| Emissivity/gain ¹ | 0.100 to 1.100 | | | |
| Transmissivity/gain ¹ | 0.100 to 1.000 | | | |
| Signal processing ¹ | peak hold, valley hold, average; extended hold function with threshold and hysteresis | | | |
| Certificate of calibration | optional | | | |
| Outputs/analogue | channel 1 channel 2 optional | 0/4 to 20mA, 0 to 5/10V, thermocouple J, K sensor temperature (-20 to 180°C as 0 to 5V or 0 to 10V), alarm output relay: 2 x 60VDC/ 42VAC _{eff.} ; 0.4A; optically isolated | | |
| Alarm output | | open - collector (24V/ 50mA) | | |
| Outputs/digital | optional | USB, RS232, RS485, CAN, Profibus DP, Ethernet | | |
| Output impedances | current output voltage output | mA max. 500Ω (with 5 to 36VDC) mV min. 100kΩ load impedance; thermocouple 20Ω | | |
| Inputs | | programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions) | | |
| Cable length | | 3m (standard), 8m, 15m | | |
| Power supply | | 8 to 36VDC; max. 160mA | | |
| Laser | | class II (635nm), 1mW, ON/OFF via controller or software | | |
| Environmental rating | | IP 65 (NEMA-4) | | |
| Ambient temperature | | sensor: -20°C to 85°C (50°C if Laser is ON) controller: 0°C to 85°C | | |
| Storage temperature | | sensor: -40°C to 85°C controller: -40°C to 85°C | | |
| Relative humidity | | 10 to 95%, non condensing | | |
| Vibration | sensor | IEC 68-2-6: 3G, 11 to 200Hz, any axis | | |
| Shock | sensor | IEC 68-2-27: 50G, 11ms, any axis | | |
| Weight | | sensor: 600g; controller: 420g | | |

¹ adjustable via controller or software

² ± ambient temperature: 23 ±5°C; whichever is greater

Accessories page 22 - 23

- ▶ Mounting bracket
- ▶ Air purge collar
- ▶ Rail mount adapter for controller
- ▶ Water cooled housing
- ▶ Interface kit
- ▶ Software CompactConnect
- ▶ Certificate of calibration



LASER RADIATION
 DO NOT STARE IN THE BEAM
 CLASS 2 LASER
 EN60825-1:2002
 $P \leq 1\text{mW}$; $\lambda = 630\text{-}650\text{nm}$



thermoMETER CTlaserM1/M2


Innovative precision infrared temperature sensor marking the actual spot size on your measurement target at any distance with $1/1.6 \mu\text{m}$ wavelength for metal, ceramic and shiny targets

- Measuring range from 250°C to 2200°C
- Special short wavelength ($1/1.6\mu\text{m}$) minimises errors caused by low emissivity for accurate temperature measurements on metal, shiny and ceramic targets
- Cooling and protection accessories for harsh environmental conditions
- Real mapping of the actual spot size, with automatic laser protection
- Precision optics (300:1 / 150:1) with different models for a specific focus point
- Extreme small measurement spot down to 0.45mm, only 1ms response time to capture fast events
- Up to 85°C ambient temperature without cooling
- Fully programmable instrument for enhanced signal processing and I/O control
- Separate controller with easy accessible programming keys and multi colour LCD backlit display

Optical specifications thermoMETER CTlaser M1/M2

□ = smallest spot size (mm)

| Standard Focus optics | | | | | | | | | | | | | | | |
|-----------------------|--------------|----|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 1L/2L SF | 150:1 | 20 | 18.3 | 16.5 | 14.8 | 13 | 11.4 | 9.6 | 8.5 | 7.3 | 9.8 | 13.5 | 17.3 | 23.5 | 34.6 |
| 1H/2H/H1 SF | 300:1 | 20 | 17.8 | 15.5 | 13.2 | 11 | 8.6 | 6.4 | 4.8 | 3.7 | 5.5 | 8.6 | 11.8 | 17 | 26.6 |
| distance in mm | | 0 | 150 | 300 | 450 | 600 | 750 | 900 | 1000 | 1100 | 1200 | 1350 | 1500 | 1750 | 2200 |
| Close Focus optics | | | | | | | | | | | | | | | |
| 1L/2L CF2 | 150:1 | 20 | 13.7 | 7.3 | 1 | 8 | 15 | 22 | 36 | 50 | 64 | 78 | 92 | | |
| 1H/2H/H1 CF2 | 300:1 | 20 | 13.5 | 7 | 0.5 | 7.3 | 14 | 21 | 34.5 | 48.2 | 61.8 | 75.4 | 89 | | |
| 1L/2L CF3 | 150:1 | 20 | 15.4 | 10.7 | 6 | 1.3 | 6.7 | 12 | 22.6 | 33.3 | 44 | 55 | 65 | | |
| 1H/2H/H1 CF3 | 300:1 | 20 | 15.2 | 10.3 | 5.6 | 0.7 | 5.9 | 11 | 21.2 | 31.5 | 41.8 | 52.1 | 62.4 | | |
| distance in mm | | 0 | 50 | 100 | 150 | 200 | 250 | 300 | 400 | 500 | 600 | 700 | 800 | | |
| Close Focus optics | | | | | | | | | | | | | | | |
| 1L/2L CF4 | 150:1 | 20 | 18.1 | 16.3 | 14.4 | 12.5 | 10.6 | 8.7 | 6.8 | 4.9 | 3 | 5.6 | 10.7 | 12.8 | 21 |
| 1H/2H/H1 CF4 | 300:1 | 20 | 18 | 16 | 13.8 | 11.8 | 9.7 | 7.6 | 5.6 | 3.5 | 1.4 | 3.8 | 8.6 | 13.3 | 18 |
| distance in mm | | 0 | 50 | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 600 | 700 | 800 |
| Far Focus optics | | | | | | | | | | | | | | | |
| 1L/2L FF | 150:1 | 20 | 20.5 | 21 | 21.5 | 22 | 22.5 | 23 | 23.4 | 24 | 29 | 41 | 53.4 | 62.5 | |
| 1H/2H/H1 FF | 300:1 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13.4 | 12 | 16.5 | 24.4 | 33.4 | 40 | |
| distance in mm | | 0 | 450 | 900 | 1350 | 1800 | 2250 | 2700 | 3000 | 3600 | 4000 | 5000 | 6000 | 6750 | |

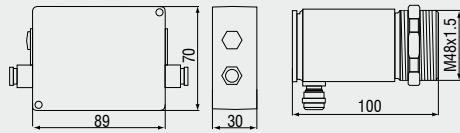

Product identification

CTLM - 1 L SF150 - C3

Cable length [3m Standard / 8m / 15m]
 Focus [SF / CF2 / CF3 / CF4 / FF]
 Temperature range [L / H / H1]
 Spectral range [1 μ m / 1.6 μ m]
 thermoMETER CTLaserM

| Model | CTLM-1LSF150-C3 | CTLM-1HSF300-C3 | CTLM-1H1SF300-C3 | CTLM-2LSF150-C3 | CTLM-2HSF300-C3 | CTLM-2H1SF300-C3 |
|---|---|--|------------------|-----------------|-----------------|------------------|
| Optical resolution | 150:1 | 300:1 | | 150:1 | 300:1 | |
| Temperature range ¹ | 485 to 1050°C | 650 to 1800°C | 800 to 2200°C | 250 to 800°C | 385 to 1600°C | 490 to 2000°C |
| Spectral range | 1 μ m | | | 1.6 μ m | | |
| System accuracy ² | \pm (0.3% of reading + 2°C) | | | | | |
| Repeatability ² | \pm (0.1% of reading + 1°C) | | | | | |
| Temperature resolution | 0.1°C | 0.2°C | | 0.1°C | 0.2°C | |
| Response time (90% signal) ³ | 1ms | | | | | |
| Emissivity/gain ¹ | 0.100 to 1.100 | | | | | |
| Transmissivity/gain ¹ | 0.100 to 1.000 | | | | | |
| Signal processing ¹ | Peak hold, valley hold, average; extended hold function with threshold and hysteresis | | | | | |
| Certificate of calibration | optional | | | | | |
| Outputs/analogue | channel 1 optional | 0/4 to 20mA, 0 to 5/ 10V, thermocouple J, K relay: 2 x 60 VDC/ 42VAC _{eff} ; 0.4A; optically isolated | | | | |
| Alarm output | | open-collector (24V/ 50mA) | | | | |
| Outputs/digital | optional | USB, RS232, RS485, CAN, Profibus DP, Ethernet | | | | |
| Output impedances | current output voltage output | mA max. 500 Ω (with 5 - 36VDC) mV min. 100k Ω load impedance thermocouple 20 Ω | | | | |
| Inputs | | programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions) | | | | |
| Cable length | | 3m (standard), 8m, 15m | | | | |
| Power supply | | 8 to 36VDC; max. 160mA | | | | |
| Laser | | class II (635nm), 1mW, ON/OFF via controller or software | | | | |
| Environmental rating | | IP 65 (NEMA-4) | | | | |
| Ambient temperature | | sensor: -20°C to 85°C (50°C if laser ON) controller: 0°C to 65°C | | | | |
| Storage temperature | | sensor: -40°C to 85°C controller: -40°C to 85°C | | | | |
| Relative humidity | | 10 to 95%, non condensing | | | | |
| Vibration | sensor | IEC 68-2-6: 3 G, 11-200Hz, any axis | | | | |
| Shock | sensor | IEC 68-2-27: 50 G, 11ms, any axis | | | | |
| Weight | | sensor: 600g; controller: 420g | | | | |

¹ adjustable via controller or software

² E=1, response time 1s; \pm ambient temperature: 23 \pm 5°C

³ with dynamic adaptation at low signal levels

Accessories page 22 - 23

- ▶ Mounting bracke
- ▶ Air purge collar
- ▶ Rail mount adapter for controller
- ▶ Water cooled housing
- ▶ Interface kit
- ▶ Software CompactConnect
- ▶ Certificate of calibration



LASER RADIATION
 DO NOT STARE IN THE BEAM
 CLASS 2 LASER
 EN60825-1:2002
 P \leq 1mW; λ =630-650nm



thermoMETER CTlaserM3


Innovative precision infrared temperature sensor marking the actual spot size on your measurement target at any distance with 2.3µm wavelength for metal, ceramic and shiny targets

- Measuring range from 50°C to 1800°C
- Special short wavelength (2.3µm) minimises errors caused by low emissivity for accurate temperature measurements on metal, shiny and ceramic targets down to 50°C
- Cooling and protection accessories for harsh environmental conditions
- Real mapping of the actual spot size, with automatic laser protection
- Precision optics (300:1 / 100:1 / 60:1) with different models for a specific focus point
- Extreme small measurement spot down to 0.45mm
- Only 1ms response time to capture fast events

Optical specifications thermoMETER CTlaserM3

□ = smallest spot size (mm)

| Standard Focus optics | | | | | | | | | | | | | | | |
|-------------------------|--------------|----|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 3LSF | 60:1 | 20 | 20 | 20 | 20 | 20 | 19 | 19 | 19 | 18.3 | 19 | 25 | 30 | 40 | 53 |
| 3HSF | 100:1 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 12 | 11 | 13 | 16 | 20 | 28 | 38 |
| 3 H1/H2/H3 SF300 | 300:1 | 20 | 17.8 | 15.5 | 13.2 | 11 | 8.6 | 6.4 | 4.8 | 3.7 | 5.5 | 8.6 | 11.8 | 17 | 26.6 |
| <i>distance (mm)</i> | | 0 | 150 | 300 | 450 | 600 | 750 | 900 | 1000 | 1100 | 1200 | 1350 | 1500 | 1750 | 2200 |
| Close Focus optics | | | | | | | | | | | | | | | |
| 3LCF1 | 60:1 | 20 | 11.3 | 1.4 | 10.3 | 17.8 | 30.4 | 43 | 56 | 81 | 106 | 132 | 157 | 182 | |
| 3HCF1 | 100:1 | 20 | 11 | 0.85 | 9.5 | 16.8 | 29.1 | 41.4 | 53.6 | 78.2 | 103 | 128 | 152 | 177 | |
| <i>distance (mm)</i> | | 0 | 40 | 85 | 120 | 150 | 200 | 250 | 300 | 400 | 500 | 600 | 700 | 800 | |
| Close Focus optics | | | | | | | | | | | | | | | |
| 3LCF2 | 60:1 | 20 | 14.2 | 8.4 | 2.5 | 10 | 17.5 | 25 | 40 | 55 | 70 | 85 | 100 | | |
| 3HCF2 | 100:1 | 20 | 14 | 7.7 | 1.5 | 8.7 | 16 | 23 | 38 | 52 | 66 | 81 | 95 | | |
| 3 H1/H2/H3 CF2 | 300:1 | 20 | 13.5 | 7 | 0.45 | 7.3 | 14 | 21 | 34.5 | 48.2 | 61.8 | 75.4 | 89 | | |
| 3LCF3 | 60:1 | 20 | 16 | 11.7 | 7.6 | 3.4 | 9.3 | 15.1 | 27 | 39 | 51 | 62 | 74 | | |
| 3HCF3 | 100:1 | 20 | 15.5 | 11 | 6.5 | 2 | 7.5 | 13 | 24 | 35 | 46 | 57 | 68 | | |
| 3 H1/H2/H3 CF3 | 300:1 | 20 | 15.2 | 10.3 | 5.5 | 0.7 | 5.8 | 11 | 21.2 | 31.5 | 41.8 | 52.1 | 62.4 | | |
| <i>distance (mm)</i> | | 0 | 50 | 100 | 150 | 200 | 250 | 300 | 400 | 500 | 600 | 700 | 800 | | |



Product identification

CTLM - 3 L SF60 - C3

Cable length [3m Standard / 8m / 15m]
 Focus [SF60/100 / CF1 / CF2 / CF3 / CF4]
 Temperature range [L / H]
 Spectral range [2.3μm]
 thermoMETER CTLaserM3

| Model | CTLM-3LSF60-C3 | CTLM-3HSF100-C3 | CTLM-3H1SF300-C3 | CTLM-3H2SF300-C3 | CTLM-3H3SF300-C3 |
|---|---|--|------------------|------------------|------------------|
| Optical resolution | 60:1 | 100:1 | 300:1 | | |
| Temperature range ^{1,2} | 50 to 400°C | 100 to 600°C | 150 to 1000°C | 200 to 1500°C | 250 to 1800°C |
| Spectral range | 2.3μm | | | | |
| System accuracy ³ | ±(0.3% of reading +2°C) | | | | |
| Repeatability ³ | ±(0.1% of reading +1°C) | | | | |
| Temperature resolution (digital) | 0.1°C | | | | |
| Response time (90% signal) ⁴ | 1ms | | | | |
| Emissivity/gain ¹ | 0.100 to 1.100 | | | | |
| Transmissivity/gain ¹ | 0.100 to 1.100 | | | | |
| Signal processing ¹ | peak hold, valley hold, average; extended hold function with threshold and hysteresis | | | | |
| Certificate of calibration | optional | | | | |
| Outputs/analogue | channel 1 | 0/4 to 20mA, 0 to 5/ 10V, thermocouple J, K | | | |
| Outputs/analogue (option) | | relay: 2 x 60VDC / 42VAC; 0.4A; optically isolated | | | |
| Alarm output | | open-collector (24V / 50mA) | | | |
| Outputs/digital | option | USB, RS232, RS485, CAN, Profibus DP, Ethernet | | | |
| Output impedances | current output | mA max. 500Ω (with 5 - 36VDC) | | | |
| | voltage output | mV min. 100kΩ load impedance; thermocouple 20Ω | | | |
| Inputs | | programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions) | | | |
| Cable length | | 3m (standard), 8m, 15m | | | |
| Power supply | | 8 to 36 VDC; max. 160mA | | | |
| Laser | | class II (635nm), 1mW, ON/OFF via controller or software | | | |
| Environmental rating | | IP 65 (NEMA-4) | | | |
| Ambient temperature | | sensor: -20°C to 85°C (50°C if laser ON) controller: 0°C to 85°C | | | |
| Storage temperature | | sensor: -40°C to 85°C controller: -40°C to 85°C | | | |
| Relative humidity | | 10 to 95%, non condensing | | | |
| Vibration | sensor | IEC 68-2-6: 3G, 11-200Hz, any axis | | | |
| Shock | sensor | IEC 68-2-27: 50G, 11ms, any axis | | | |
| Weight | | sensor: 600g; controller: 420g | | | |

¹ adjustable via controller or software

² target temperature > sensor temperature + 25°C

³ E=1, response time 1s; ± ambient temperature: 23 ±5°C

⁴ with dynamic adaptation at low signal levels

Optical specifications thermoMETER CTLaserM3

□ = smallest spot size (mm)

| Close Fokus | | | | | | | | | | | | | | | |
|-----------------------|--------------|----|------|------|------|------|------|------|------|------|------|------|------|------|-----|
| 3LCF4 | 60:1 | 20 | 18.7 | 17.3 | 15.9 | 14.5 | 13.1 | 11.7 | 10.3 | 9 | 7.5 | 10.6 | 17 | 23 | 29 |
| 3HCF4 | 100:1 | 20 | 18.3 | 16.6 | 14.9 | 13.2 | 11.4 | 9.7 | 8 | 6.3 | 4.5 | 7.3 | 13 | 19 | 24 |
| 3 H1/H2/H3 CF4 | 300:1 | 20 | 18 | 16 | 13.8 | 11.8 | 9.7 | 7.6 | 5.6 | 3.5 | 1.4 | 3.8 | 8.6 | 13.3 | 18 |
| distance (mm) | | 0 | 50 | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 600 | 700 | 800 |
| Far Field | | | | | | | | | | | | | | | |
| 3 H1/H2/H3 FF | 300:1 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13.4 | 12 | 16.5 | 24.4 | 33.4 | 40 | |
| distance (mm) | | 0 | 450 | 900 | 1350 | 1800 | 2250 | 2700 | 3000 | 3600 | 4000 | 5000 | 6000 | 6750 | |

Accessories page 22 - 23

- ▶ Mounting bracket
- ▶ Air purge collar
- ▶ Rail mount adapter for controller
- ▶ Water cooled housing
- ▶ Interface kit
- ▶ Software CompactConnect
- ▶ Certificate of calibration



thermoMETER CTLaserM5


Precise non-contact temperature measurement of liquid metals from 1000°C to 2000°C

- Measuring range from 1000°C to 2000°C
- Short measuring wavelength of 525nm minimises errors due to emissivity uncertainty and atmospheric vapour effects
- Response time of 1ms
- Extreme small measurement spot down to 1mm
- For metallurgical processes and for measurements of metal oxides and ceramics
- Optical resolution up to 150:1 with selectable focus
- Up to 85°C ambient temperature without cooling, automatic laser switch off at 50°C
- Double laser aiming marks real spot location at any distance

Optical specifications thermoMETER CTLaserM5

□ = smallest spot size (mm)

| Standard Focus optics | | | | | | | | | | | | | | | |
|-----------------------|--------------|----|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 1L/2L SF | 150:1 | 20 | 18.3 | 16.5 | 14.8 | 13 | 11.4 | 9.6 | 8.5 | 7.3 | 9.8 | 13.5 | 17.3 | 23.5 | 30 |
| <i>distance in mm</i> | | 0 | 150 | 300 | 450 | 600 | 750 | 900 | 1000 | 1100 | 1200 | 1350 | 1500 | 1750 | 2000 |
| Far Focus optics | | | | | | | | | | | | | | | |
| 1L/2L FF | 150:1 | 20 | 20.5 | 21 | 21.5 | 22 | 22.5 | 23 | 23.4 | 24 | 29 | 41 | 53.4 | 62.5 | |
| <i>distance in mm</i> | | 0 | 450 | 900 | 1350 | 1800 | 2250 | 2700 | 3000 | 3600 | 4000 | 5000 | 6000 | 6750 | |

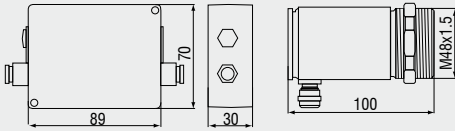

Product identification

CTLM - 5 SF150 - C3

Cable length [3m Standard / 8m / 15m]
 Focus [SF / FF]
 Spectral range [525nm]
 thermoMETER CTLaserM

| Model | | CTLM-5SF150-C3 |
|---|----------------------------------|--|
| Optical resolution | | 150:1 |
| Temperature range ¹ | | 1000 to 2000°C |
| Spectral range | | 525nm |
| System accuracy ² | | ±(0.3% of reading +2°C) |
| Repeatability ² | | ±(0.1% of reading +1°C) |
| Temperature resolution | | 0.2°C |
| Response time (90% signal) ³ | | 1ms |
| Emissivity/gain ¹ | | 0.100 to 1.000 |
| Transmissivity/gain ¹ | | 0.100 to 1.000 |
| Signal processing ¹ | | Peak hold, valley hold, average; extended hold function with threshold and hysteresis |
| Certificate of calibration | | optional |
| Outputs/analogue | channel 1 | 0/4 to 20mA, 0 to 5/ 10V, thermocouple J, K |
| Outputs/analogue optional | | relay: 2 x 60 VDC/ 42VAC _{eff} ; 0.4A; optically isolated |
| Alarm output | | open-collector (24V/ 50mA) |
| Outputs/digital | optional | USB, RS232, RS485, CAN, Profibus DP, Ethernet |
| Output impedances | current output voltage output | mA max. 500Ω (with 5 - 36VDC) mV min. 100kΩ load impedance; thermocouple 20Ω |
| Inputs | | programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions) |
| Cable length | | 3m (standard), 8m, 15m |
| Power supply | | 8 to 36VDC; max. 160mA |
| Laser | | class II (635nm), 1mW, ON/OFF via controller or software |
| Environmental rating | | IP 65 (NEMA-4) |
| Ambient temperature | | sensor: -20°C to 85°C (50°C if laser ON) controller: 0°C to 85°C |
| Storage temperature | | sensor: -40°C to 85°C controller: -40°C to 85°C |
| Relative humidity | | 10 to 95%, non condensing |
| Vibration | sensor | IEC 68-2-6: 3G, 11-200Hz, any axis |
| Shock | sensor | IEC 68-2-27: 50G, 11ms, any axis |
| Weight | | sensor: 600g; controller: 420g |

¹ adjustable via controller or software

² E=1, response time 1s; ± ambient temperature: 23 ±5°C

³ with dynamic adaptation at low signal levels

Accessories page 22 - 23

- ▶ Mounting bracket
- ▶ Air purge collar
- ▶ Rail mount adapter for controller
- ▶ Water cooled housing
- ▶ Interface kit
- ▶ Certificate of calibration



LASER RADIATION
 DO NOT STARE IN THE BEAM
 CLASS 2 LASER
 EN60825-1:2002
 P≤1mW; λ=630-650nm



thermoMETER CTLaserCOMBUSTION


The combustion temperature sensors has been designed specially for the measurement of combustion processes. The thermoMETER CTLaser C2/C4/C6 sensors can measure the temperature of objects through flames or directly record the temperature of flame gases.

- Measuring range from 200°C to 1450°C
- Double laser aiming marks real spot location and spot size up from 1.6mm at any distance
- Usable in all modern applications where “size of spot matters”
- Optics 45:1 with selectable focus
- Usable up to 85°C ambient temperature without cooling and automatic laser switch off at 50°C
- Cooling and protection accessories for harsh environmental conditions

Optical specifications thermoMETER CTLaserCOMBUSTION

□ = smallest spot size (mm)

| Standard Focus optics | | | | | | | | | | | | | | | | | |
|-----------------------|-------------|----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| SF45 optic | 45:1 | 20 | 20.8 | 21.7 | 22.5 | 23.4 | 24.2 | 25 | 25.9 | 27 | 32.5 | 38.4 | 50 | 61.7 | 73.4 | | |
| distance in mm | | 0 | 150 | 300 | 450 | 600 | 750 | 900 | 1050 | 1200 | 1350 | 1500 | 1800 | 2100 | 2400 | | |
| Close Focus optics | | | | | | | | | | | | | | | | | |
| CF1 optic | 45:1 | 20 | 9.5 | 7 | 1.6 | 11 | 26.3 | 41.7 | 57 | 72.6 | 88.2 | 104 | 1196 | 135 | 165 | 196 | 227 |
| CF2 optic | 45:1 | 20 | 16 | 14.5 | 12 | 9 | 3.4 | 11.2 | 19 | 27 | 35 | 42.5 | 50.3 | 58 | 73.6 | 89.2 | 105 |
| CF3 optic | 45:1 | 20 | 17 | 16.2 | 14.5 | 12.3 | 8.4 | 4.5 | 10.7 | 16.8 | 23 | 29 | 35 | 41.3 | 53.5 | 65.8 | 78 |
| CF4 optic | 45:1 | 20 | 19.2 | 19 | 18.6 | 18 | 17 | 15.6 | 14.5 | 13.4 | 12.3 | 11.1 | 10 | 13.4 | 20 | 26.7 | 33.4 |
| distance in mm | | 0 | 40 | 50 | 70 | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 600 | 700 | 800 |

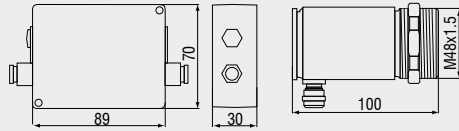

Product identification

CTLC - 4 SF45 - C3

Cable length [3m Standard / 8m / 15m]
 Focus [SF45 / CF1 / CF2 / CF3 / CF4]
 Spectral range [3.9 μ m / 4.24 μ m / 4.64 μ m]
 thermoMETER CTLaserCOMBUSTION

| Model | CTLC-4SF45-C3 | CTLC-2SF45-C3 | CTLC-6SF45-C3 |
|---|---|--|---|
| Optical resolution | 45:1 | | |
| Temperature range ¹ | 200°C to 1450°C | | |
| Spectral range | 3.9 μ m | 4.24 μ m | 4.64 μ m |
| Fields of application | through flames to monitor workpieces inside ovens, to measure inside chemical reactors, to observe the brick temperature in combustion chambers | CO ₂ flame gases in combustion processes, garbage burning or processes inside chemical reactors | CO flame gases in combustion processes, garbage burning or processes inside chemical reactors |
| System accuracy ^{3,4} | ±1% | | |
| Repeatability ³ | ±0.5% or ±0.5°C | | |
| Temperature resolution | 0.1°C | | |
| Response time (90% signal) ² | 10ms | | |
| Emissivity/gain ¹ | 0.100 - 1.100 | | |
| Transmissivity/gain ¹ | 0.100 - 1.000 | | |
| Signal processing ¹ | peak hold, valley hold, average; extended hold function with threshold and hysteresis | | |
| Outputs/analogue | channel 1 channel 2 | 0/4 - 20mA, 0 - 5/10V, thermocouple J, K sensing head temperature (-20°C to 180°C as 0 to 5V or 0 to 10V), alarm output | |
| Alarm output | 24V / 50mA (open collector) | | |
| Optional | relay: 2 x 60VDC/42VAC _{eff} ; 0.4A; optically isolated | | |
| Outputs/digital | optional | USB, RS232, RS485, CAN, Profibus DP, Ethernet | |
| Output impedances | current output voltage output | mA max. 500 Ω (with 8 to 36VDC) mV min. 100k Ω load impedance ; thermocouple 20 Ω | |
| Inputs | programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions) | | |
| Cable length | 3m (standard), 8m, 15m | | |
| Power supply | 8 to 36VDC; max. 160mA | | |
| Laser | class II (635nm), 1mW, ON/OFF via controller or software | | |
| Environmental rating | IP 65 (NEMA-4) | | |
| Ambient temperature | sensor: -20°C to 85°C (50°C if Laser ON) ; controller: 0°C to 85°C | | |
| Storage temperature | -40°C to 85°C | | |
| Relative humidity | 10 to 95%, non condensing | | |
| Vibration | IEC 68-2-6: 3G, 11 - 200Hz, any axis | | |
| Shock | IEC 68-2-27: 50G, 11ms, any axis | | |
| Weight | sensor: 600g ; controller: 420g | | |

¹ adjustable via programming keys or software

² with dynamic adaption at low signal levels

³ at ambient temperature 23 ± 5°C; whichever is greater; temperature of the object > 0°C

⁴ ϵ = 1, response time 1s

Accessories page 22 - 23


- ▶ Mounting bracket
- ▶ Air purge collar
- ▶ Rail mount adapter for controller
- ▶ Water cooled housing
- ▶ Interface kit
- ▶ Software CompactConnect
- ▶ Certificate of calibration




LASER RADIATION
 DO NOT STARE IN THE BEAM
 CLASS 2 LASER
 EN60825-1:2002
 P ≤ 1mW; λ = 630-650nm

Dimensions CTratioM1 / CTLaser






Controller

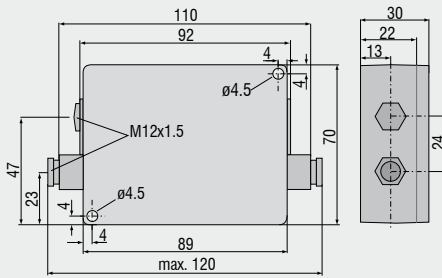

CTLaser / CTLaserFAST / CTLaserGLASS / CTLaserM1/M2 / CTLaserM3 / CTLaserM5 / CTLaserCOMBUSTION



CTratioM1

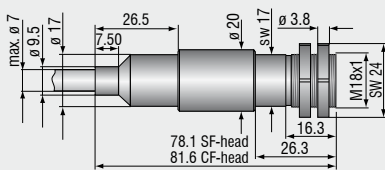


TM-FB-CTL Mounting bracket (fixed); included with CTL sensors


TM-AB-CTL Mounting bracket (adjustable)



TM-W-CTL Water cooled housing and air purge collar TM-AP-CTL, mounted on adjustable mounting bracket TM-AB-CTL

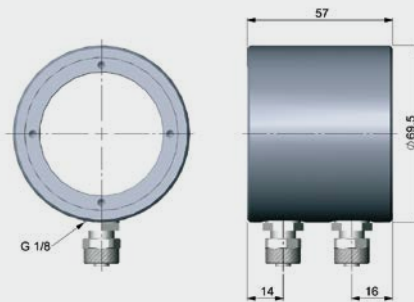

TM-W-CTL Water cooled housing

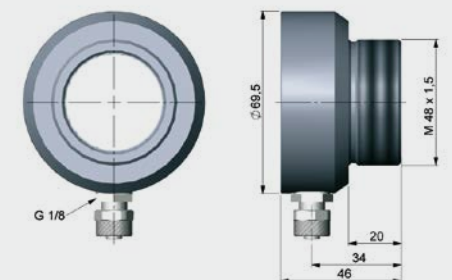

TM-AP-CTL Air purge collar

Mechanical accessories

| Art. No. | Model | |
|----------|--------------|---|
| 2970238 | TM-AB-CTL | Mounting bracket, adjustable, stainless steel |
| 2970239 | TM-AP-CTL | Air purge collar, stainless steel |
| 2970240 | TM-W-CTL | Water cooled housing, stainless steel, for ambient temperatures up to 175°C |
| 2970241 | TM-RAIL-CTL | Rail mount adapter for CTlaser controller |
| 2970242 | TM-COV-CTL | Closed cover for controller |
| 2970243 | TM-MN-CTL | Mounting nut, stainless steel (spare) |
| 2970244 | TM-FB-CTL | Mounting bracket, fixed, stainless steel (spare) |
| 2970298 | TM-A20UN-CTL | Screw adapter M48x1 on 20UN-2A screw including mounting nut |

High temperature accessories

| | | |
|---------|---------------|---|
| 2970366 | TM-J-CTL | Cooling jacket (length 228mm, ø89mm) (connection kit TM-CONK-CTL is required) |
| 2970374 | TM-CONK-CTL | Connection kit: sensor with axial cable exit, for integration in cooling jacket |
| 2970368 | TM-JAB-CTL | Adjustable mounting bracket for cooling jacket |
| 2970369 | TM-MF-CTL | Mounting flange M48x1.5 for TM-PF-CTL |
| 2970370 | TM-AST300-CTL | Sighting tube M48x1.5, 300 mm length |
| 2970371 | TM-PA-CTL | Pipe adapter M48x1.5 |
| 2970372 | TM-RM-CTL | Furnace wall mount accessory for CTlaser (TM-MF-CTL, TM-AST300-CTL and TM-PA-CTL) |
| 2970412 | TM-PF-CTL | Pipe flange M48x1.5 for direct mounting a CTL sensor |

Calibration

| | | |
|---------|---------------|--|
| 2970253 | TM-CERT-CTL | Certificate of calibration |
| 2970324 | TM-HTCERT-CTL | Certificate of calibration for CTlaser M1-/M2-/M3-/M5-/G-sensors |

Interfaces

| | | |
|---------|------------------|--|
| 2970245 | TM-USBK-CTL | USB interface kit incl. computer cable, software CompactConnect |
| 2970246 | TM-RS232K-CTL | RS232 interface kit incl. computer cable, software CompactConnect |
| 2970338 | TM-RS485USBK-CTL | RS485-USB-adapter, incl. PC cable, RS485 board, software CTconnect, terminal block, for use with TM-485B-CTL |
| 2970248 | TM-RS485B-CTL | RS485 interface board |
| 2970249 | TM-CANK-CTL | CAN-Bus interface for optris CT/ protocol: CANopen Presettings: module address 20 (14H), 250kbaud, 0-60°C |
| 2970250 | TM-PFBDPK-CTL | Profibus-DPV1 interface for CT selectable with DIN M12 or SUB-D connection |
| 2970251 | TM-ETHNK-CTL | Ethernet-Kit: interface board, external Ethernet adapter, software CompactConnect |
| 2970252 | TM-RI-CTL | Relay interface: Two optically isolated relays, 60VDC/ 42VAC _{RMS} , 0.4A |

Sensor cables and high temperature cables

| | | |
|--------------|---------------|--|
| 2970374 | TM-CONK-CTL | Connector-Kit for cables with connector |
| 4800254.003 | TM-CB3C-CTL | Sensor cable with adapter (3m) |
| 4800254.003H | TM-CB3HC-CTL | High-temperature sensor cable with adapter (3m) |
| 4800254.008 | TM-CB8C-CTL | Sensor cable with adapter (8m) |
| 4800254.008H | TM-CB8HC-CTL | High-temperature sensor cable with adapter (8m) |
| 4800254.015 | TM-CB15C-CTL | Sensor cable with adapter (15m) |
| 4800254.015H | TM-CB15HC-CTL | High-temperature sensor cable with adapter (15m) |




TM-J-CTL Cooling jacket (length 228mm, ø89mm) with adjustable mounting bracket TM-JAB-CTL; up to 315°C ambient temperature



TM-PF-CTL and TM-MF-CTL Mounting flange M48x1.5 for direct mounting a CTL sensor



TM-RM-CTL Furnace wall mount accessory for CTlaser / resp. CTratio: TM-MF-CTL, TM-PF-CTL, TM-AST300-CTL and TM-PA-CTL

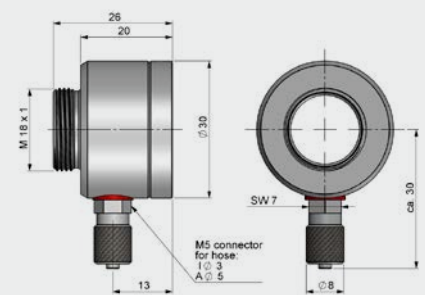

TM-AP-CTR Air purge collar

CTratio

| Art. No. | Model | |
|----------|-------------|--|
| 2970348 | TM-FB-CTR | Mounting bracket, adjustable in one axis |
| 2970395 | TM-AP-CTR | Air purge collar |
| 2970373 | TM-RM-CTR | Furnace wall mount accessory for CTratio |
| 2970351 | TM-CERT-CTR | Certificate of calibration |



thermoMETER CT


This state of the art non contact infrared temperature sensor sets the industry standard for common applications with a spectral range of 8...14µm. It offers the most compact sensing head packaging in conjunction with a sophisticated fully instrumented controller.

- Measuring range from -50 to 975°C
- World's smallest sensor with 22:1 precision optics
- Rugged design, operates in an environment up to 180°C without cooling
- Analogue and digital output, thermocouple J/K emulation and serial interface
- 150ms response time
- Fully programmable instrument for enhanced signal processing and I/O control
- Separate controller with easy accessible programming keys and multi colour LCD backlit display
- Best price / performance value

Optical specifications thermoMETER CT

□ = smallest spot size (mm)

| Standard Focus optics | | | | | | | | | | |
|--|-------------|---|-----|-----|-----|-----|-----|-----|-----|-----|
| SF02 | 2:1 | 5 | 50 | 100 | 150 | 200 | 250 | 300 | 350 | 400 |
| SF15 | 15:1 | 7 | 8 | 13 | 20 | 27 | 33 | 40 | 47 | 53 |
| SF22 | 22:1 | 7 | 7 | 9 | 14 | 18 | 23 | 27 | 32 | 36 |
| distance in mm | | 0 | 100 | 200 | 300 | 400 | 500 | 600 | 700 | 800 |
| Close Focus optics (CF lense optional available) | | | | | | | | | | |
| CF02 | 2:1 | 7 | 5.6 | 4.3 | 3 | 2.5 | 2.4 | 3 | 4.7 | 6.3 |
| CF15 | 15:1 | 7 | 5 | 0.8 | 5 | 11 | 16 | 21 | 27 | 32 |
| CF22 | 22:1 | 7 | 4 | 0.6 | 4 | 8 | 12 | 16 | 20 | 24 |
| distance in mm | | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 |



Product identification

CT - SF02 - C3
 Cable length [1m / 3m (standard) / 8m / 15m]
 Focus [SF02 / SF15 / SF22]
 thermoMETER CT

| Model | CT-SF02-C3 | CT-SF15-C3 | CT-SF22-C3 |
|----------------------------------|---|--|---------------------------------|
| Optical resolution | 2:1 | 15:1 | 22:1 |
| Temperature range ¹ | -50°C to 600°C | -50°C to 600°C | -50°C to 975°C |
| Spectral range | 8 to 14μm | | |
| System accuracy ² | ±1% or ±1°C | | |
| Repeatability ² | ±0.5% or ±0.5°C | | |
| Temperature resolution | ±0.1°C | | |
| Response time | 150ms (95%) | | |
| Emissivity/gain ¹ | 0.100 to 1.100 | | |
| Transmissivity/gain ¹ | 0.100 to 1.100 | | |
| Signal processing ¹ | peak hold, valley hold, average; extended hold function with threshold and hysteresis | | |
| Certificate of calibration | optional | | |
| Outputs/analogue | channel 1 channel 2 optional | 0/4 to 20mA, 0 to 5/10V, thermocouple J, K sensor temperature (-20 to 180°C as 0 to 5V or 0 to 10V), alarm output relay: 2 x 60VDC/ 42VACeff; 0.4A; optically isolated | |
| Outputs/digital | optional | USB, RS232, RS485, CAN, Profibus DP, Ethernet | |
| Output impedances | current output voltage output | mA max. 500Ω (with 8 to 36VDC) mV min. 100kΩ load impedance thermocouple 20Ω | |
| Inputs | programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions) | | |
| Cable length | 1m , 3m (standard), 8m, 15m | | |
| Power supply | 8 to 36VDC; max. 100mA | | |
| Environmental rating | IP 65 (NEMA-4) | | |
| Ambient temperature | sensor controller | -20°C to 130°C | -20°C to 180°C 0 °C to 85°C |
| Storage temperature | sensor controller | -40°C to 130°C | -40°C to 180°C -40°C to 85°C |
| Relative humidity | 10 - 95%, non condensing | | |
| Vibration | sensor | IEC 68-2-6: 3 G, 11 to 200Hz, any axis | |
| Shock | sensor | IEC 68-2-27: 50 G, 11ms, any axis | |
| Weight | sensor: 40g; controller: 420g | | |

¹ adjustable via controller or software

² ± ambient temperature 23 ±5°C; whichever is greater

Accessories page 42 - 45


- ▶ CF lens
- ▶ Protective window
- ▶ Mounting bracket / Mounting bolt
- ▶ Air purge collar
- ▶ Right angle mirror
- ▶ Rail mount adapter for controller
- ▶ Massive housing
- ▶ Protective tube
- ▶ Laser sighting tool
- ▶ Digital-Interface kit
- ▶ Relay output module
- ▶ Accessory-Kit for use of the CT in hazardous locations
- ▶ Software CompactConnect
- ▶ Certificate of calibration



thermoMETER CTfast

This unit incorporates the world's fastest thermopile detector. It captures fast events or moving objects and gets an accurate temperature reading with an response time as little as 3ms / 6ms.

- Measuring range from -50 to 975°C
- One of the smallest infrared sensors worldwide with response times as short as 3ms (50% signal) and 6ms (90% signal)
- Continuous process monitoring with an unchopped sensor system.
Note: Conventional fast pyroelectrical infrared sensors with mechanical chopper see processes only part of the time
- Easy to assemble in multiple arrays for line scanning of small and fast objects (hotspot detection) using a bus communication
- Analogue and digital output, thermocouple J/K emulation and serial interface
- Fully programmable instrument for enhanced signal processing and I/O control
- Separate controller with easy accessible programming keys and multi colour LCD backlit display

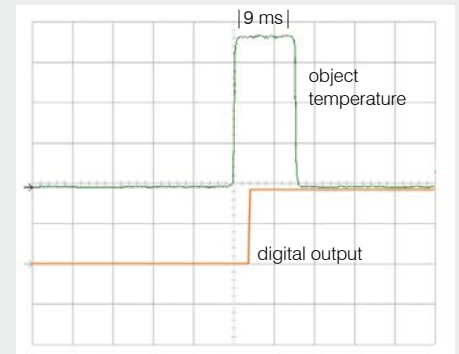


Time constants for temperature jumps between 25°C and 180°C (Model SF15)

Optical specifications thermoMETER CTfast

□ = smallest spot size (mm)

| Standard Focus optics | | | | | | | | | | | | | | |
|--|-------------|-----|-----|-----|-----|-----|------|------|------|------|-----|------|------|--|
| SF15 | 15:1 | 7 | 8 | 13 | 20 | 27 | 33 | 40 | 47 | 53 | | | | |
| SF25 | 25:1 | 6.5 | 7.3 | 8 | 12 | 16 | 20 | 24 | 28 | 32 | 36 | 40 | 44 | |
| distance in mm | | 0 | 100 | 200 | 300 | 400 | 500 | 600 | 700 | 800 | 900 | 1000 | 1100 | |
| Close Focus optics (CF lense optional available) | | | | | | | | | | | | | | |
| CF15 | 15:1 | 7 | 5 | 0.8 | 5 | 11 | 16 | 21 | 27 | 32 | | | | |
| distance in mm | | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | | | | |
| CF25 | 25:1 | 6.2 | 3.4 | 0.5 | 3.8 | 7.1 | 10.4 | 14.5 | 18.7 | 22.8 | 27 | | | |
| distance in mm | | 0 | 4 | 8 | 12 | 16 | 20 | 25 | 30 | 35 | 40 | | | |



Product identification

CTF - SF15 - C3 Cable length [1m / 3m (standard) / 8m / 15m]
 Focus [SF15 / SF25]
 thermoMETER CTfast

| Model | CTF-SF15-C3 | CTF-SF25-C3 |
|---------------------------------------|--|---|
| Optical resolution | 15:1 | 25:1 |
| Temperature range ¹ | -50°C to 975°C | |
| Spectral range | 8 to 14µm | |
| System accuracy ² | ±1% or ±2°C | |
| Repeatability ² | ±0.75% or ±0.75°C | |
| Temperature resolution ^{3,4} | ±0.2°C | ±0.4°C |
| Response time ⁵ | 9ms (90%) at analogue output 4ms (50%) at digital output | 6ms (90%) at analogue output 3ms (50%) at digital output |
| Emissivity/gain ¹ | 0.100 to 1.100 | |
| Transmissivity/gain ¹ | 0.100 to 1.100 | |
| Signal processing ¹ | Peak hold, valley hold, average; extended hold function with threshold and hysteresis | |
| Certificate of calibration | optional | |
| Outputs/analogue | 0/4 to 20mA; 0 to 5/10V; thermocouple J, K | |
| Alarm output | open-collector (24V/ 50mA) | |
| Outputs/digital | standard optional | 0/10V (10mA) optional: relay: 2 x 60VDC / 42V AC; 0.4 mA; optically isolated |
| Digital Interface | optional | USB, RS232, RS485, CAN, Profibus DP, Ethernet |
| Output impedances | current output voltage output | mA max. 500Ω (8 to 36VDC) mV min. 100kΩ load impedance ; thermocouple 20Ω |
| Inputs | programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions) | |
| Cable length | 1m, 3m (standard), 8m, 15m | |
| Power supply | 8 to 36VDC; max. 100mA | |
| Environmental rating | IP 65 (NEMA-4) | |
| Ambient temperature | sensor: -20°C to 120°C controller: 0°C to 85°C | |
| Storage temperature | sensor: -40°C to 120°C controller: -40°C to 85°C | |
| Relative humidity | 10 to 95%, non condensing | |
| Vibration | sensor | IEC 68-2-6: 3 G, 11 to 200Hz, any axis |
| Shock | sensor | IEC 68-2-27: 50 G, 11ms, any axis |
| Weight | sensor: 40g; controller: 420g | |

¹ adjustable via programming keys or software

² ± ambient temperature 23 ±5°C; whichever is greater with dynamic noise compression

³ at object temperature ≥20°C

⁴ at time constant 100ms with smart averaging and T_{obj} 25°C

⁵ with dynamic adaption at low signal levels

Accessories page 42 - 45

- ▶ CF lens
- ▶ Protective window
- ▶ Mounting bracket / Mounting bolt
- ▶ Air purge collar
- ▶ Right angle mirror
- ▶ Rail mount adapter for controller
- ▶ Massive housing
- ▶ Protective tube
- ▶ Laser sighting tool
- ▶ Digital-Interface kit
- ▶ Software CompactConnect
- ▶ Certificate of calibration



thermoMETER CThot

The CThot has been designed for the most extreme temperature environment applications.

The thermopile detector embedded inside the sensor head is absolutely unique. It can measure in an ambient environment of 250°C without any additional external cooling.


The compact sensor head is housed in a special housing to reduce any thermal shock.

- Measuring range from -40°C to 975°C
- Sensor operates in up to 250°C environment without any cooling
- High pressure stability up to 10bar (autoclave)
- Integrated high temperature cable
- Ideal for applications in dryers, ovens, heat treatment lines in the metal and glass industry, paper, plastic and textile manufacturing and semiconductor processing
- Analogue and digital output, thermocouple J/K emulation and serial interface
- Fully programmable instrument for enhanced signal processing and I/O control
- Separate controller with easy accessible programming keys and multi colour LCD backlit display

Optical specifications thermoMETER CThot

□ = smallest spot size (mm)

| Standard Focus optics | | | | | | | | | | |
|--|------|---|-----|-----|-----|-----|-----|-----|-----|-----|
| SF02 | 2:1 | 5 | 50 | 100 | 150 | 200 | 250 | 300 | 350 | 400 |
| SF10 | 10:1 | 7 | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 |
| distance in mm | | 0 | 100 | 200 | 300 | 400 | 500 | 600 | 700 | 800 |
| Close Focus optics (CF lense optional available) | | | | | | | | | | |
| CF02 | 2:1 | 7 | 5.6 | 4.3 | 3 | 2.6 | 2.6 | 3 | 4.7 | 6.3 |
| CF10 | 10:1 | 7 | 5 | 1.2 | 8 | 18 | 24 | | | |
| distance in mm | | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 |



Product identification

CTH - SF02 - C3H
 Cable length [3m (standard) / 8m / 15m]
 Focus [SF02 / SF10]
 thermoMETER CThot

| Model | CTH-SF02-C3H | CTH-SF10-C3H |
|----------------------------------|---|---|
| Optical resolution | 2:1 | 10:1 |
| Temperature range ¹ | -40 to 975°C | |
| Spectral range | 8 to 14μm | |
| System accuracy ² | ±1% or ±1.5°C | |
| Repeatability ² | ±0.5% or ±0.5°C | |
| Temperature resolution | ±0.25°C | |
| Response time | 100ms | |
| Emissivity/gain ¹ | 0.100 to 1.100 | |
| Transmissivity/gain ¹ | 0.100 to 1.100 | |
| Signal processing ¹ | Peak hold, valley hold, average; extended hold function with threshold and hysteresis | |
| Certificate of calibration | optional | |
| Outputs/analogue | channel 1 channel 2 optional | 0/4 to 20mA, 0 to 5/10V, thermocouple J, K sensor temperature (-20 to 250°C as 0 to 5V or 0 to 10V), alarm output relay: 2 x 60VDC/ 42VAC _{eff} ; 0.4A; optically isolated |
| Outputs/digital | optional | USB, RS232, RS485, CAN, Profibus DP, Ethernet |
| Output impedances | current output voltage output | mA max. 500Ω (5 to 36VDC) mV min. 100kΩ load impedance thermocouple 20Ω |
| Inputs | programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions) | |
| Cable length | 3m (standard), 8m, 15m | |
| Power supply | 8 to 36VDC; max. 100mA | |
| Environmental rating | IP 65 (NEMA-4) | |
| Ambient temperature | sensor: -20°C to 250°C controller: 0°C to 85°C | |
| Storage temperature | sensor: -40°C to 250°C controller: -40°C to 85°C | |
| Relative humidity | 10 to 95%, non condensing | |
| Vibration | sensor | IEC 68-2-6: 3 G, 11 to 200Hz, any axis |
| Shock | sensor | IEC 68-2-27: 50 G, 11ms, any axis |
| Weight | sensor: 40g (without massive housing); controller: 420g | |

¹ adjustable via programming keys or software

² ± ambient temperature: 23±5°C; whichever is greater; at object temperatures ≥20°C

Accessories page 42 - 45

- ▶ Rail mount adapter for controller
- ▶ Digital-Interface kit
- ▶ Software CompactConnect
- ▶ Relay output module
- ▶ Certificate of calibration



thermoMETER CTM1/M2


This state of the art non contact infrared temperature sensor operates with a wavelength of $1/1.6\mu\text{m}$. This special spectral range minimises the emissivity errors on shiny targets and allows readings through glass. The integrated photon detector guarantees maximum sensitivity and extreme fast response time.

- Measuring range from 250° to 2200°C
- $1.0\mu\text{m}$ and $1.6\mu\text{m}$ wave length for measurements of metals, metal oxides, ceramic materials and shiny targets
- Short measuring wave length reduces error of temperature readings on surfaces with low or unknown emissivity
- Up to 125°C ambient temperature without cooling
- Precision optics (75:1 / 40:1) with different models for a specific focus point
- 1ms response time to capture fast events
- Fully programmable instrument for enhanced signal processing and I/O control
- Separate controller with easy accessible programming keys and multi colour LCD backlit display

Optical specifications thermoMETER CTM1/M2

□ = smallest spot size (mm)

| Standard Focus optics | | | | | | | | | | | |
|---|-------------|-----|-----|-----|-----|-----|------|------|------|------|------|
| 1SF40/2SF40 | 40:1 | 7 | 7 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | |
| 1SF75/2SF75 | 75:1 | 7 | 7 | 7 | 8 | 11 | 14 | 17 | 20 | 23 | |
| distance in mm | | 0 | 200 | 400 | 600 | 800 | 1000 | 1200 | 1400 | 1600 | |
| Close Focus optics (integrated CF lens) | | | | | | | | | | | |
| 1CF40/2CF40 | 40:1 | 6.5 | 5.5 | 4.4 | 2.7 | 5.7 | 7.8 | 11.4 | 15 | 18.5 | 22.1 |
| 1CF75/2CF75 | 75:1 | 6.5 | 5 | 3.2 | 1.5 | 3.6 | 5.4 | 8.4 | 11.3 | 14.3 | 17.3 |
| distance in mm | | 0 | 50 | 100 | 110 | 170 | 200 | 250 | 300 | 350 | 400 |

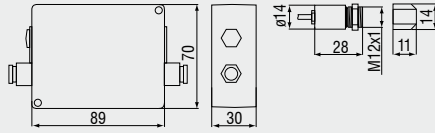

Product identification

CTM - 1 SF40 - C3

Cable length [3m (standard) / 8m / 15m]
 Focus [SF40 / SF75 / CF40 / CF75]
 Spectral range [1 μ m / 1.6 μ m]
 thermoMETER CTM

| Model | CTM-1SF40-C3 | CTM-1SF75-C3 | CTM-1SF75H1-C3 | CTM-2SF40-C3 | CTM-2SF75 -C3 | CTM-2SF75H1 -C3 |
|----------------------------------|---|---|----------------|--------------|----------------|-----------------|
| Optical resolution | 40:1 | 75:1 | | 40:1 | 75:1 | |
| Temperature range ¹ | 485 to 1050°C | 650 to 1800°C | 800 to 2200°C | 250 to 800°C | 385 to 1600°C | 490 to 2000°C |
| Spectral range | 1.0 μ m | | | 1.6 μ m | | |
| System accuracy ^{2,3} | \pm (0.3% of reading + 2°C) | | | | | |
| Repeatability ² | \pm (0.1% of reading + 1°C) | | | | | |
| Temperature resolution | \pm 0.1°C | | | | | |
| Response time ⁴ | 1ms (90%) | | | | | |
| Emissivity/gain ¹ | 0.100 to 1.100 | | | | | |
| Transmissivity/gain ¹ | 0.100 to 1.100 | | | | | |
| Signal processing ¹ | Peak hold, valley hold, average; extended hold function with threshold and hysteresis | | | | | |
| Certificate of calibration | optional | | | | | |
| Outputs/analogue | channel 1 optional | 0/4 to 20mA, 0 to 5/10V, thermocouple J, K relay: 2 x 60V DC/ 42V ACeff; 0.4A; optically isolated | | | | |
| Outputs/digital | optional | USB, RS232, RS485, CAN, Profibus DP, Ethernet | | | | |
| Output impedances | current output voltage output | mA max. 500 Ω (8 to 36VDC) mV min. 100k Ω load impedance thermocouple 20 Ω | | | | |
| Inputs | | programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions) | | | | |
| Cable length | | 3m (standard), 8m, 15m | | | | |
| Power supply | | 8 to 36VDC; max. 100mA | | | | |
| Environmental rating | | IP 65 (NEMA-4) | | | | |
| Ambient temperature | sensor controller | -20°C to 100°C | 0°C to 85°C | | -20°C to 125°C | |
| Storage temperature | sensor controller | -40°C to 100°C | -40°C to 85°C | | -40°C to 125°C | |
| Relative humidity | | 10 to 95%, non condensing | | | | |
| Vibration | sensor | IEC 68-2-6: 3 G, 11 to 200Hz, any axis | | | | |
| Shock | sensor | IEC 68-2-27: 50 G, 11ms, any axis | | | | |
| Weight | | sensor: 40g; controller: 420g | | | | |

¹ adjustable via programming keys or software

² \pm ambient temperature 23 \pm 5°C

³ E=1, response time 1s

⁴ with dynamic adaption at low signal levels

Accessories page 42 - 45

- ▶ CF lens
- ▶ Protective window
- ▶ Mounting bracket / Mounting bolt
- ▶ Air purge collar
- ▶ Right angle mirror
- ▶ Rail mount adapter for controller
- ▶ Massive housing
- ▶ Protective tube
- ▶ Laser sighting tool
- ▶ Digital-Interface kit
- ▶ Software CompactConnect
- ▶ Certificate of calibration
- ▶ Relay output module



thermoMETER CTM3


This state of the art non contact infrared temperature sensor operates with a wavelength of $2.3\mu\text{m}$. This special spectral range minimises the emissivity errors and allows readings through glass down to low temperatures of 50°C . The integrated photon detector guarantees maximum sensitivity and extreme fast response time.

- Measuring range from 50° to 1800°C
- $2.3\mu\text{m}$ wave length for measurements of metals, metal oxides, ceramic materials and shiny targets
- Short measuring wave length reduces error of temperature readings on surfaces with low or unknown emissivity
- Up to 125°C ambient temperature without cooling
- Precision optics (75:1 / 33:1 / 22:1) with different models for a specific focus point
- 1ms response time to capture fast events
- Fully programmable instrument for enhanced signal processing and I/O control
- Separate controller with easy accessible programming keys and multi colour LCD backlit display

Optical specifications thermoMETER CTM3

□ = smallest spot size (mm)

| Standard Focus optics | | | | | | | | | | | |
|---|-------------|-----|-----|-----|-----|-----|------|------|------|------|------|
| 3SF22 | 22:1 | 7 | 9 | 18 | 27 | 36 | 45 | 55 | 64 | 73 | |
| 3SF33 | 33:1 | 7 | 7 | 12 | 18 | 24 | 30 | 36 | 42 | 48 | |
| 3SF75H1/H2/H3 | 75:1 | 7 | 7 | 7 | 8 | 11 | 14 | 17 | 20 | 23 | |
| <i>distance in mm</i> | | 0 | 200 | 400 | 600 | 800 | 1000 | 1200 | 1400 | 1600 | |
| Close Focus optics (integrated CF lens) | | | | | | | | | | | |
| 3CF22 | 22:1 | 6.5 | 6 | 5.5 | 5 | 9.2 | 14.5 | 19.7 | 24.9 | 30.1 | 35.4 |
| 3CF33 | 33:1 | 6.5 | 5.4 | 4.2 | 3.4 | 6.9 | 11.4 | 15.9 | 20.4 | 24.8 | 29.3 |
| 3CF75H1/H2/H3 | 75:1 | 6.5 | 5 | 3.2 | 1.5 | 3.6 | 5.4 | 8.4 | 11.3 | 14.3 | 17.3 |
| <i>distance in mm</i> | | 0 | 40 | 80 | 110 | 150 | 200 | 250 | 300 | 350 | 400 |



Product identification

CTM - 3 SF22 - C3

Cable length [3m]
 Focus [SF22 / SF33 / SF75 / CF22 / CF33 / CF75]
 Spectral range [2.3 μ m]
 thermoMETER CTM

| Model | CTM-3SF22-C3 | CTM-3SF33-C3 | CTM-3SF75H1-C3 | CTM-3SF75H2-C3 | CTM-3SF75H3-C3 |
|----------------------------------|---|--|----------------|----------------|----------------|
| Optical resolution ¹ | 22:1 | 33:1 | 75:1 | 75:1 | 75:1 |
| Temperature range ^{2,3} | 50 to 400°C | 100 to 600°C | 150 to 1000°C | 200 to 1500°C | 250 to 1800°C |
| Spectral range | 2.3 μ m | | | | |
| System accuracy ^{4,5} | \pm (0.3% of reading +2°C) | | | | |
| Repeatability ⁴ | \pm (0.1% of reading +1°C) | | | | |
| Temperature resolution (digital) | \pm 0.1°C | | | | |
| Response time ⁶ | 1ms (90%) | | | | |
| Emissivity/gain ² | 0.100 to 1.100 | | | | |
| Transmissivity/gain ² | 0.100 to 1.100 | | | | |
| Signal processing ² | Peak hold, valley hold, average; extended hold function with threshold and hysteresis | | | | |
| Certificate of calibration | optional | | | | |
| Outputs/analogue | channel 1 | 0/4 to 20mA, 0 to 5/10V, thermocouple J, K | | | |
| Outputs/analogue | optional | relay: 2 x 60 VDC/42 VAC _{eff} ; 0.4A; optically isolated | | | |
| Alarm output | | open-collector (24V / 50mA) | | | |
| Outputs/digital | optional | USB, RS232, RS485, CAN, Profibus DP, Ethernet | | | |
| Output impedances | current output voltage output | relay max. 500 Ω (8 to 36VDC) min. 100k Ω load impedance; thermocouple 20 Ω | | | |
| Inputs | | programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions) | | | |
| Cable length | | 3m | | | |
| Power supply | | 8 to 36VDC; max. 100mA | | | |
| Environmental rating | | IP 65 (NEMA-4) | | | |
| Ambient temperature | | sensor: -40°C to 85°C controller: 0°C to 85°C | | | |
| Storage temperature | | sensor: -40°C to 125°C controller: -40°C to 85°C | | | |
| Relative humidity | | 10 to 95%, non condensing | | | |
| Vibration | sensor | IEC 68-2-6: 3G, 11 to 200Hz, any axis | | | |
| Shock | sensor | IEC 68-2-27: 50G, 11ms, any axis | | | |
| Weight | | sensor: 40g; controller: 420g | | | |

¹ 90% energy

² adjustable via programming keys or software

³ target temperature > sensor temperature + 25°C

⁴ \pm ambient temperature 23 \pm 5°C

⁵ E=1, response time 1s

⁶ with dynamic adaption at low signal levels

Accessories page 42 - 45

- ▶ CF lens
- ▶ Protective window
- ▶ Mounting bracket / Mounting bolt
- ▶ Air purge collar
- ▶ Right angle mirror
- ▶ Rail mount adapter for controller
- ▶ Massive housing
- ▶ Protective tube
- ▶ Laser sighting tool
- ▶ Digital-Interface kit
- ▶ Software CompactConnect
- ▶ Certificate of calibration
- ▶ Relay output module



thermoMETER CTM-3XL


This state of the art non contact infrared temperature sensor operates with a wavelength of $2.3\mu\text{m}$. This special spectral range minimises the emissivity errors and allows readings through glass down to low temperatures of 100°C . A special filter blocks all visible light and no visible up to 1800nm , as well as the $10.6\mu\text{m}$ wavelength.

- Temperature measurement from 100°C to 1800°C
- For laser material processing, laser welding and laser soldering
- Special blocking filter against laser radiation from almost all laser diodes and solid state lasers (VIS to 1800nm and $10.6\mu\text{m}$)
- FF: Far focus optics for use with laser collimator optics
- CF: close focus optics for miniature spot size of 0.5mm
- Operation temperature up to 85°C without cooling
- Short wave length range of $2.3\mu\text{m}$ to minimise error when measuring against materials with unknown emissivity
- Measures through glass

Optical specifications thermoMETER CTM-3XL

□ = smallest spot size (mm)

| Standard Focus optics | | | | | | | | | | | | | | | | |
|-------------------------|--------------|----------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| SF100 | 100:1 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 12 | 11 | 13 | 16 | 20 | 28 | 38 | |
| SF300 H1/H2/H3 | 300:1 | 20 | 17.8 | 15.5 | 13.2 | 11 | 8.6 | 6.4 | 4.8 | 3.7 | 5.5 | 8.6 | 11.8 | 17 | 26.6 | |
| | | distance in mm | 0 | 150 | 300 | 450 | 600 | 750 | 900 | 1000 | 1100 | 1200 | 1350 | 1500 | 1750 | 2200 |
| Close Focus optics | | | | | | | | | | | | | | | | |
| CF1-100 | 100:1 | 20 | 11 | 0.85 | 9.5 | 16.8 | 29.1 | 41.4 | 53.6 | 78.2 | 103 | 128 | 152 | 177 | | |
| | | distance in mm | 0 | 40 | 85 | 120 | 150 | 200 | 250 | 300 | 400 | 500 | 600 | 700 | 800 | |
| Close Focus optics | | | | | | | | | | | | | | | | |
| CF2-100 | 100:1 | 20 | 14 | 7.7 | 1.5 | 8.7 | 16 | 23 | 38 | 52 | 66 | 81 | 95 | | | |
| CF2-300 H1/H2/H3 | 300:1 | 20 | 13.5 | 7 | 0.5 | 7.3 | 14 | 21 | 34.5 | 48.2 | 61.8 | 75.4 | 89 | | | |
| CF3-100 | 100:1 | 20 | 15.5 | 11 | 6.5 | 2 | 7.5 | 13 | 24 | 35 | 46 | 57 | 68 | | | |
| CF3-300 H1/H2/H3 | 300:1 | 20 | 15.2 | 10.3 | 5.5 | 0.7 | 5.8 | 11 | 21.2 | 31.5 | 41.8 | 52.1 | 62.4 | | | |
| | | distance in mm | 0 | 50 | 100 | 150 | 200 | 250 | 300 | 400 | 500 | 600 | 700 | 800 | | |
| Close Focus optics | | | | | | | | | | | | | | | | |
| CF4-100 | 100:1 | 20 | 18.3 | 16.6 | 14.9 | 13.2 | 11.4 | 9.7 | 8 | 6.3 | 4.5 | 7.3 | 13 | 19 | 24 | |
| CF4-300 H1/H2/H3 | 300:1 | 20 | 18 | 16 | 13.8 | 11.8 | 9.7 | 7.6 | 5.6 | 3.5 | 1.5 | 3.8 | 8.6 | 13.3 | 18 | |
| | | distance in mm | 0 | 50 | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 600 | 700 | 800 |

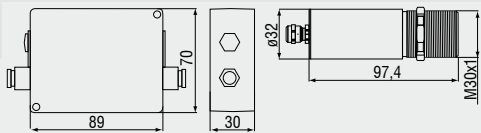

Product identification

CTM - 3 SF100XL - C3

Cable length [3m]
Focus [see optical specifications]
Spectral range [2.3 μ m]
thermoMETER CTM

| Model | CTM-3SF100XL-C3 | CTM-3SF300XLH1-C3 | CTM-3SF300XLH2-C3 | CTM-3SF300XLH3-C3 |
|---|--|--|-------------------|-------------------|
| Optical resolution ¹ | 100:1 | 300:1 | 300:1 | 300:1 |
| Temperature range ^{2,3} | 100 to 600°C | 150 to 1000°C | 200 to 1500°C | 250 to 1800°C |
| Spectral range | 2.3 μ m | | | |
| System accuracy ^{4,5} | \pm (0.3% of reading + 2°C) | | | |
| Repeatability ⁴ | \pm (0.1% of reading + 1°C) | | | |
| Temperature resolution (digital) | 0.1°C | | | |
| Response time (90% signal) ⁶ | 1ms | | | |
| Emissivity/gain ² | 0.100 to 1.100 | | | |
| Transmissivity/gain ² | 0.100 to 1.100 | | | |
| Signal processing ² | peak hold, valley hold, average; extended hold function with threshold and hysteresis | | | |
| Certificate of calibration | optional | | | |
| Outputs/analogue | 0/4 to 20mA, 0 to 5/ 10V, thermocouple J, K, alarm | | | |
| Outputs/analogue (option) | relay: 2 x 60VDC / 42VAC; 0.4A; optically isolated | | | |
| Alarm output | open-collector (24V / 50mA) | | | |
| Outputs/digital | option | USB, RS232, RS485, CAN, Profibus DP, Ethernet | | |
| Output impedances | current output | mA max. 500 Ω (with 5 - 36VDC) | | |
| | voltage output | mV min. 100k Ω load impedance; thermocouple 20 Ω | | |
| Inputs | programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions) | | | |
| Cable length | 3m | | | |
| Power supply | 8 to 36VDC; max. 100mA | | | |
| Environmental rating | IP 65 (NEMA-4) | | | |
| Ambient temperature | sensor: -40°C to 85°C controller: 0°C to 85°C | | | |
| Storage temperature | sensor: -40°C to 125°C controller: -40°C to 85°C | | | |
| Relative humidity | 10 to 95%, non condensing | | | |
| Vibration | sensor | IEC 68-2-6: 3G, 11-200Hz, any axis | | |
| Shock | sensor | IEC 68-2-27: 50G, 11ms, any axis | | |
| Weight | sensor: 150g; controller: 420g | | | |

¹ 90% energy

² adjustable via programming keys or software

³ target temperature > sensor temperature + 25°C

⁴ \pm ambient temperature 23 \pm 5°C

⁵ E=1, response time 1s

⁶ with dynamic adaptation at low signal levels

Optical specifications thermoMETER CTM-3XL

□ = smallest spot size (mm)

| Far Focus optics | | | | | | | | | | | | | | |
|-----------------------|-----------------------|----|-----|-----|------|------|------|------|------|------|------|------|------|------|
| FF100 | 100:1 | 20 | 22 | 24 | 26 | 28 | 30 | 32 | 33.4 | 36 | 42.5 | 58 | 73.5 | 85 |
| FF300 H1/H2/H3 | 300:1 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13.4 | 12 | 16.5 | 24.4 | 33.4 | 40 |
| | <i>distance in mm</i> | 0 | 450 | 900 | 1350 | 1800 | 2250 | 2700 | 3000 | 3600 | 4000 | 5000 | 6000 | 6750 |

Accessories page 42 - 45

- ▶ Mounting bracket
- ▶ Air purge collar
- ▶ Digital-Interface kit
- ▶ Certificate of calibration



thermoMETER CTP7


This state of the art non contact infrared temperature sensor operates with a wavelength of 7.9 μ m. This special spectral range allows the IR temperature sensor to measure accurate against thin plastic film materials such as PET, PU, PTFE and PA.

- Measuring range from 0° to 500°C
- Accurate temperature measurement of thin plastic film materials
- Up to 85°C ambient temperature without cooling
- 150ms response time
- Fully programmable instrument for enhanced signal processing and I/O control
- Separate controller with easy accessible programming keys and multi colour LCD

Optical specifications thermoMETER CTP7

□ = smallest spot size (mm)

| Standard Focus optics | | | | | | | | | | |
|-----------------------|------|---|-----|-----|-----|-----|-----|-----|-----|-----|
| SF10 | 10:1 | 7 | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 |
| distance in mm | | 0 | 100 | 200 | 300 | 400 | 500 | 600 | 700 | 800 |



Product identification

CTP - 7 SF10 - C3

Cable length [3m (standard) / 8m / 15m]
 Focus
 Spectral range [7.9 μ m]
 thermoMETER CTP7

| Model | | CTP-7SF10-C3 |
|----------------------------------|------------------------------------|---|
| Optical resolution | | 10:1 |
| Temperature range ¹ | | 0 to 500°C |
| Spectral range | | 7.9 μ m |
| System accuracy ² | | $\pm 1\%$ or $\pm 1.5^\circ\text{C}$ |
| Repeatability ² | | $\pm 0.5\%$ or $\pm 0.5^\circ\text{C}$ |
| Temperature resolution | | $\pm 0.5^\circ\text{C}$ |
| Response time | | 150ms |
| Emissivity/gain ¹ | | 0.100 to 1.100 |
| Transmissivity/gain ¹ | | 0.100 to 1.100 |
| Signal processing ¹ | | Peak hold, valley hold, average; extended hold function with threshold and hysteresis |
| Outputs/analogue | channel 1 channel 2 optional | 0/4 to 20mA, 0 to 5/10V, thermocouple J, K sensor temperature (-20 to 180°C as 0 to 5V or 0 to 10V), alarm output relay: 2 x 60VDC/ 42VAC _{eff} ; 0.4A; optically isolated |
| Outputs/digital | optional | USB, RS232, RS485, CAN, Profibus DP |
| Output impedances | current output voltage output | mA max. 500 Ω (8 to 36VDC) mV min. 100k Ω load impedance thermocouple 20 Ω |
| Inputs | | programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions) |
| Cable length | | 3m (standard), 8m, 15m |
| Power supply | | 8 to 36VDC; max. 100mA |
| Environmental rating | | IP 65 (NEMA-4) |
| Ambient temperature | | sensor: -20°C to 85°C controller: 0°C to 85°C |
| Storage temperature | | sensor: -40°C to 85°C controller: -40°C to 85°C |
| Relative humidity | | 10 to 95%, non condensing |
| Vibration | sensor | IEC 68-2-6: 3 G, 11 to 200Hz, any axis |
| Shock | sensor | IEC 68-2-27: 50 G, 11ms, any axis |
| Weight | | sensor: 200g; controller: 420g |

¹ adjustable via programming keys or software

² \pm ambient temperature: 23 \pm 5°C; whichever is greater



thermoMETER CTtrans

CTtrans is a compact material analysis system to measure transmissivity, emissivity or degree of reflection. The system uses an active infrared transmitter in combination with an IR CT detector. A programmable controller with display processes the measurement data and outputs the information analogue or digitally.


- Combination of miniaturised infrared radiator and CT - infrared sensor
- Different modes for evaluation of the material parameters transmissivity, emissivity and reflection
- 0-10V - output allows transmission of the determined emissivity to a CT sensor
- Infrared temperature measurement with automatic material detection
- Available as a mobile system (with carrying case) or for fixed installations
- High life span of the infrared source (40.000h operating time)



Emissivity




Transmissivity

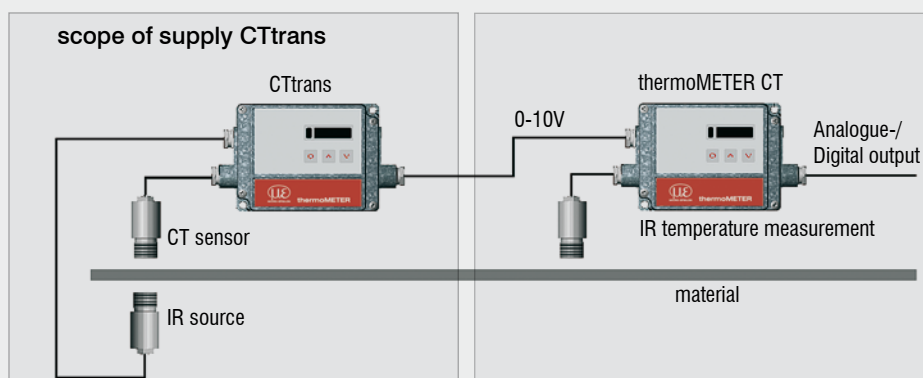

Online detection of emissivity and transmissivity

If material changes the new emissivity and transmissivity will be determined by the CTtrans and transferred via 0-10V output to the CT connected for temperature measurement.



Product identification

CTT - SF15 - C3
 Cable length 3m
 SF=Standard Focus
 thermoMETER CTtrans

| Model | CTT-SF15-C3 | |
|---|--|---|
| Spectral range | 8 to 14 μ m | |
| Repeatability ¹ | \pm 2,5% | |
| Probe size | >7mm | |
| Emissivity | 10 to 100% | |
| Transmissivity/gain | 0 to 100% | |
| Reflexion | 0 to 100% | |
| Measurement cycle | 0.1 to 99s | |
| Recommended distance (IR source - sensor) | 30 to 60mm | |
| Outputs/analogue | 0/4 to 20mA, 0 to 5/10V | |
| Output/digital | 3.3V / 30mA | |
| Relay output | optional | 2 x 60VDC / 42VAC _{eff} ; 0.4A; optically isolated |
| Outputs/digital | optional | USB, RS232, RS485 (optional) |
| Output impedances | current output voltage output | mA max. 500 Ω (8 to 36VDC) mV min. 100k Ω load impedance thermocouple 20 Ω |
| Input/digital | calibration input | |
| Cable length | 3m (standard) | |
| Power supply | 10 to 24VDC; max. 150mA | |
| Environmental rating | IP 65 (NEMA-4) | |
| Ambient temperature | sensor: -20°C to 100°C IR source: -20°C to 100°C | |
| Storage temperature | sensor: -40°C to 120°C IR source: -40°C to 120°C | |
| Relative humidity | 10 to 95%, non condensing | |
| Vibration | IEC 68-2-6: 3G, 11 to 200Hz, any axis | |
| Shock | IEC 68-2-27: 50G, 11ms, any axis | |
| Weight | sensor: 40g; IR source: 40g; controller: 450g | |

¹ \pm ambient temperature: 23 \pm 5°C

Scope of supply

- ▶ CT 15:1 sensor
- ▶ IR source
- ▶ CTtrans controller
- ▶ Power supply (AA-batteries)
- ▶ Adjustment board
- ▶ Manual
- ▶ Case



thermoMETER CTex

This conversion kit allows the use of any IR thermometer series CT in hazardous environment.

- Economic and easy solution for EX rated applications
- CT sensing heads are defined as simple electrical devices (according to EN 60079-11)
- No special approval for intrinsic safety necessary
- CT gets intrinsically safe by limitation of the energy with two double zener barriers, type 9002/22-032-300-111 (R. STAHL AG)

Zener barriers

Double zener barriers (type 9002/22-032-300-111) can be included in the scope of supply if required.

NOTE: The functionality and correct reading of the CT sensor can only be guaranteed, if the recommended barriers are used.


Technical data (zener barriers)¹ type 9002/22-032-300-111

| | | |
|----------------------|--|--|
| Approvals | Europe (CENELEC) | for zone 1: PTB 01 ATEX 2053 for zone 2: PTB 01 ATEX 2054 |
| | USA | FM Approval 3010778 |
| | Canada | CSA 1284580 (LR 43394) |
| | | |
| Explosion protection | Europe (CENELEC) | for zone 1: E-II (1/2) G [EEx ia/ib] IIC/IIB for zone 2: E II 3 G EEx nA II T4 |
| | USA | I.S. circuits for: Class I, II, III, Division 1, Groups A, B, C, D, E, F, G I.S. circuits for: Class I, Zone 0, Group IIC Class I, Division 2, Groups A, B, C, D Class I, Zone 2, Group IIC |
| | Canada | I.S. circuits for: Class I, Groups A, B, C, D; Class II, Groups E, F, G Class III Class I, Division 2, Groups A, B, C, D Class I, Zone 2, Groups IIC |
| | | |
| | | |
| Installation | in zone 2, division 2 and in safe area | |
| Environmental rating | acc. to IEC 60529/terminal IP 20/housing IP 40 | |
| Ambient temperature | -20°C to 60°C | |

Technical data of controller and sensor - page 22

¹ Declaration of company R. STAHL AG
Modifications reserved

hazardous area





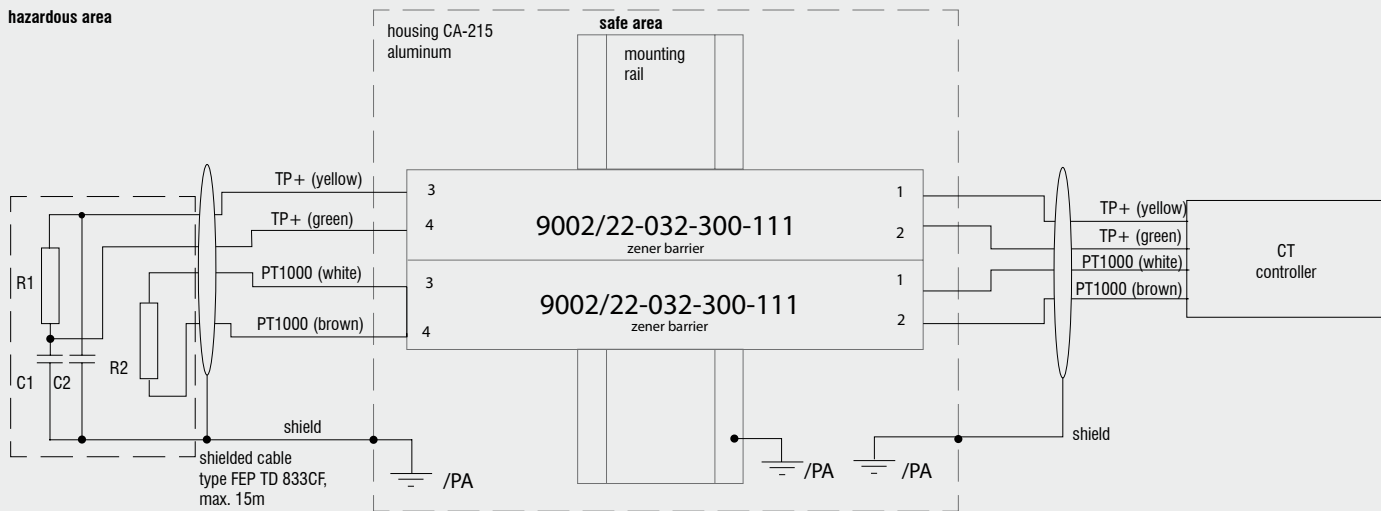


Sensor: "simple electrical device"
(according to EN 60079-11)

PA-terminals of the barriers must be grounded.

Scope of supply

- ▶ aluminum housing with mounting appliance for two zener barriers and CT controller
- ▶ pre-assembled cable for CT controller
- ▶ CD with software tool for calibrating the barrier resistance into the head code

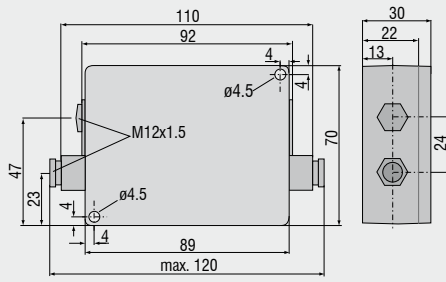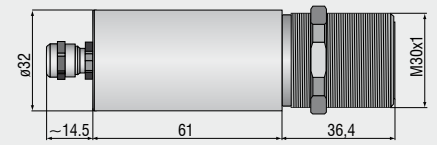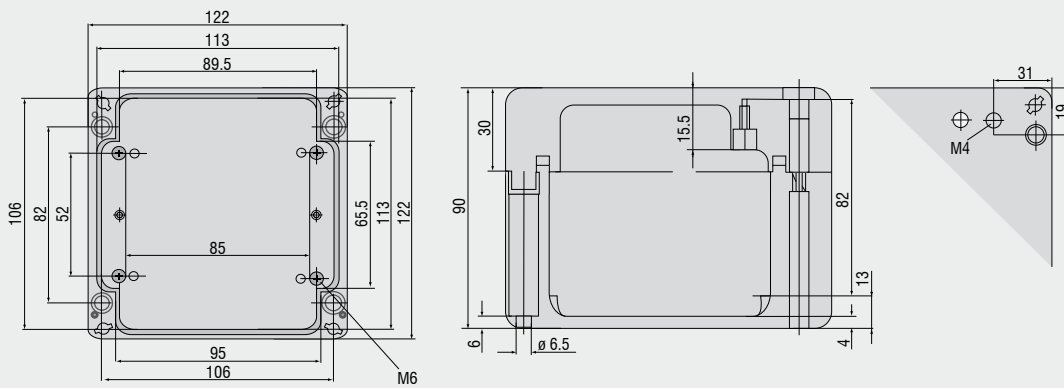Controller**CT / CTfast / CTM1/M2/M3****CTHot / CTP7****CTM3-XL****CTex**

Mechanical accessories

| Art. No. | Model | |
|-------------|-------------------|---|
| 2970203 | TM-FB-CT | Mounting bracket, fixed |
| 2970325 | TM-FB2-CT | Mounting bracket, adjustable in one axis, for simultaneous assembly of CT sensor and laser-sighting-tool |
| 2970336 | TM-FBMH-CT | Mounting bracket, adjustable in one axis, for massive housing |
| 2970204 | TM-AB-CT | Mounting bracket, adjustable in 2 axes |
| 2970205 | TM-MB-CT | Mounting bolt with M12x1 thread |
| 2970206 | TM-MG-CT | Mounting fork, adjustable in 2 axes, with thread M12x1 |
| 2970207 | TM-AP-CT | Air purge collar from 10:1 optics |
| 2970335 | TM-APS-CT | Air purge collar from 10:1 optics, stainless steel |
| 2970208 | TM-AP2-CT | Air purge collar for 2:1 optic |
| 2970209 | TM-APL-CT | Air purge collar, laminar |
| 2970210 | TM-APLCF-CT | Air purge collar, laminar, with integral CF-lens |
| 2970357 | TM-APLCFH-CT | Air purge collar, laminar, with integral CF-lens for M1/M2/M3/M5 sensors |
| 2970386 | TM-APMH-CT | Air purge collar, stainless steel for massive housing |
| 2970211 | TM-RAM-CT | Right angle mirror for 90°C measurements |
| 2970212 | TM-RAIL-CT | Rail mount adapter for CT controller |
| 2970213 | TM-COV-CT | Closed cover for controller |
| 2970214 | TM-MHS-CT | Massive housing, compact, stainless steel |
| 2970215 | TM-MHS-CF-CT | Massive housing, compact, stainless steel with integrated CF-lens |
| 2970358 | TM-MHS CFH-CT | Massive housing, compact, stainless steel with integrated CF-lens for M1/M2/M3/M5 sensors |
| 2970216 | TM-MHA-CT | Massive housing, compact, anodized aluminium |
| 2970217 | TM-MHACF-CT | Massive housing, compact, anodized aluminium with integrated CF-lens |
| 2970359 | TM-MHACFH-CT | Massive housing, compact, anodized aluminium with integrated CF-lens for M1/M2/M3 sensors |
| 2970218 | TM-MHB-CT | Massive housing, compact, brass |
| 2970219 | TM-MHBCF-CT | Massive housing, compact, brass with integrated CF-lens |
| 2970360 | TM-MHBCFH-CT | Massive housing, compact, brass with integrated CF-lens for M1/M2/M3/M5 sensors |
| 2970220 | TM-PT-CT | Protective tube, lang, brass |
| 2970326 | TM-PA-CT | Pipe adapter for sighting tube |
| 2970327 | TM-ST20-CT | Sighting tube, length 20mm |
| 2970328 | TM-ST40-CT | Sighting tube, length 40mm |
| 2970329 | TM-ST88-CT | Sighting tube, length 88mm |
| 2970221 | TM-LST-CT | Laser sighting tool for CT sensors incl. batteries (2xalkaline cells AA) |
| 2970300 | TM-LSTOEM-CT | OEM Laser pointing device, 635nm, rotation symmetrical, 3.5m cable |
| 2970300.008 | TM-LSTOEM-CT(008) | OEM Laser pointing device, 635nm, rotation symmetrical, 8m cable |
| 2970222 | TM-EX-CT | CTex-Kit: Accessory-Kit for use of the CT in hazardous locations according zone 1: PTB 01 ATEX 2053/ E II (1/2) G [EEx ia/ib] IIC/IIB, preassembled Ex-box without zener barriers, combinable with all standard CT SF sensors (except CTfast) |

Optical accessoires

| Art. No. | Model | |
|----------|-------------|--|
| 2970201 | TM-CF-CT | CF-lens (SF sensors only) |
| 2970202 | TM-PW-CT | Protective window (SF sensors only) |
| 2970297 | TM-CFAG-CT | Lens with external thread |
| 2970330 | TM-CFH-CT | Lens for M1/M2/M3 sensors |
| 2970331 | TM-CFHAG-CT | Lens with external thread for M1/M2/M3/M5 sensors |
| 2970299 | TM-PWAG-CT | Protective window with external thread |
| 2970332 | TM-PWH-CT | Protective window for M1/M2/M3/M5 sensors |
| 2970333 | TM-PWHAG-CT | Protective window with external thread for M1/M2/M3/M5 sensors |

Interfaces

| Art. No. | Model | |
|----------|-----------------|---|
| 2970223 | TM-USBK-CT | USB interface kit incl. computer cable, software CompactConnect |
| 2970224 | TM-RS232K-CT | RS232 interface kit incl. computer cable, software CompactConnect |
| 2970338 | TM-RS485USBK-CT | RS485-USB-adapter, incl. PC cable, software CTconnect, terminal block, for use with TM-485B-CT |
| 2970227 | TM-CANK-CT | CAN-Bus interface for optris CT/ protocol: CANopen Presettings: module address 20 (14H), 250kBaud, 0-60°C |
| 2970228 | TM-PFBDPK-CT | Profibus-DPV1 interface for CT selectable with DIN M12 or SUB-D connection |
| 2970229 | TM-ETHNK-CT | Profibus-DPV1 interface for CT selectable with DIN M12 or SUB-D connection |
| 2970230 | TM-RI-CT | Relay interface: Two optically isolated relays, 60VDC/ 42VACRMS, 0,4A |
| 2970226 | TM-RS485B-CT | RS485 interface |

Calibration


| Art. No. | Model | |
|----------|--------------|---|
| 2970231 | TM-CERT-CT | Certificate of calibration acc. ISO9001: testing procedure with defined ambient temperatures, target dimensions and distances; Test temperatures 20°C/ 100°C/ 500°C |
| 2970310 | TM-HTCERT-CT | Certificate of calibration for CTM sensors |

CTM3-XL


| Art. No. | Model | |
|----------|--------------|--|
| 2970352 | TM-FBXL-CT | Mounting bracket, adjustable in one axis |
| 2970353 | TM-ABXL-CT | Mounting bracket, adjustable in two axes |
| 2970354 | TM-APXL-CT | Air purge collar |
| 2970361 | TM-XLCERT-CT | Certificate of calibration |



TM-FB-CT Mounting bracket, fixed




TM-CF-CT Close Focus Lens (SF sensors only)




TM-CFAG-CT CF lens with external thread resp.
TM-PWAG-CT Protective window with external thread



TM-AB-CT Mounting gimble, adjustable in two axes




TM-MB-CT Mounting bolt with M12x1 thread adjustable




TM-APL-CT Laminar air purge collar and
TM-MG-CT Mounting fork




TM-MG-CT Mounting fork with M 12x1 thread adjustable in two axes



TM-APLCF-CT
CF lense/ protective window - integral
option for air purge collar

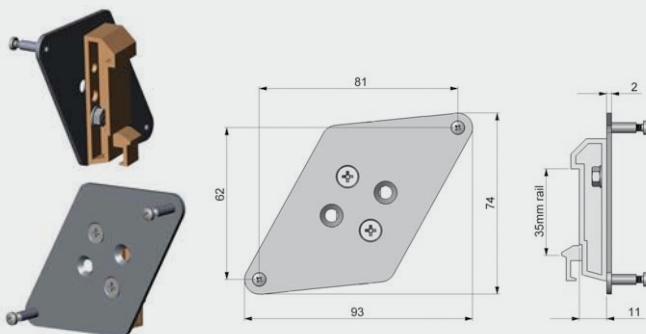


TM-RAIL-CT Rail mount adapter for controller

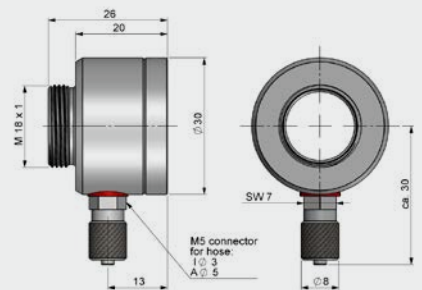

TM-APMH-CT Air purge collar,
stainless steel for massive housing




TM-PA-CT Pipe adapter for sighting tube



TM-ST40-CT Sighting tube




TM-LST-CT
Laser-Sighting tool




TM-FB2-CT
Laser-Sighting mounting bracket




TM-RAM-CT
Right angle mirror

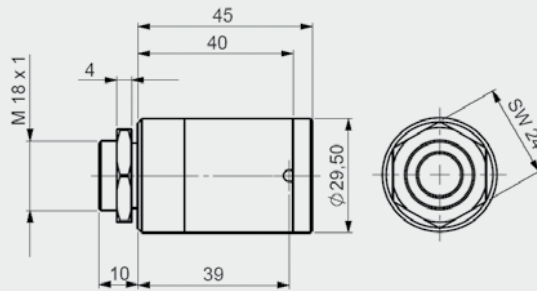

TM-MHS-CT Massive housing, compact, stainless steel
 TM-MHA-CT Massive housing, compact, aluminium
 TM-MHB-CT Massive housing, compact, brass

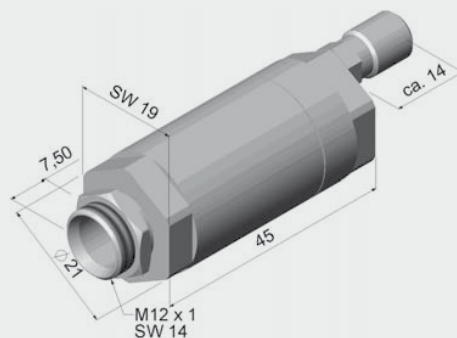

TM-AP-CT
Standard air purge collar for
10:1 / 15:1 / 22:1 optics

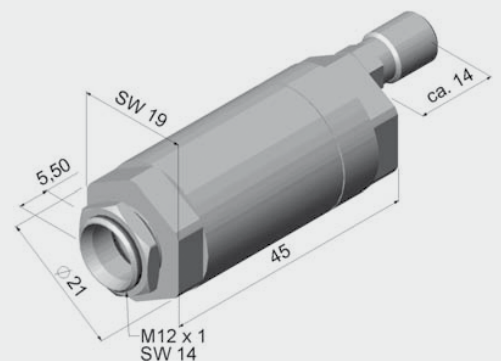

TM-AP2-CT
Standard air purge collar
for 2:1 optics

The lens must be kept clean at all times from dust, smoke, fumes and other contaminants in order to avoid reading errors. These effects can be reduced by using an air purge collar.



thermoMETER CSLaser


The thermoMETER CSLaser has a two-beam laser aiming feature, which marks the actual spot size at any distance. The controller is not necessary with this model, because the controller is already integrated into the sensor. This represents a major technical advantage, especially where space is limited. The sensor can be optimised for specific measurement tasks by using different lenses.

- Measuring range from -30°C to 1600°C
- Measuring spots up from 0.5mm and response times up from 10ms
- Optical resolution up to 300:1 with selectable focus
- Double laser aiming marks real spot location and spot size at any distance
- Scalable 4 - 20mA analogue output/ additional simultaneous alarm output
- Optional USB programming interface and software
- Emissivity directly adjustable on sensor or via software
- Short circuit and polarity reversal protection
- Usable up to 85°C ambient temperature without cooling and automatic laser switch off at 50°C
- Wide power range: 5 – 28V DC

Optical specifications thermoMETER CSLaser CSL-SF50 and CSLHS-SF50

□ = smallest spot size (mm)

| Standard Fokus | | | | | | | | | | | | | | | | | |
|-------------------|-------------|----|------|-----|------|-----|------|-----|------|------|------|------|------|------|------|-----|-----|
| SF50 optic | 50:1 | 20 | 20.5 | 21 | 21.5 | 22 | 22.5 | 23 | 23.5 | 24 | 29.5 | 35 | 48 | 57 | 68 | | |
| distance in mm | | 0 | 150 | 300 | 450 | 600 | 750 | 900 | 1050 | 1200 | 1350 | 1500 | 1800 | 2100 | 2400 | | |
| Close Fokus | | | | | | | | | | | | | | | | | |
| CF1 optic | 50:1 | 20 | 10 | 8.5 | 1.4 | 11 | 26 | 41 | 57 | 72 | 88 | 103 | 118 | 133 | 164 | 194 | 225 |
| CF2 optic | 50:1 | 20 | 15.5 | 15 | 12 | 9 | 3 | 11 | 19 | 26 | 33 | 42 | 49 | 57 | 72 | 88 | 103 |
| CF3 optic | 50:1 | 20 | 16.5 | 16 | 14 | 12 | 8 | 4 | 10 | 16 | 21 | 28 | 33 | 40 | 52 | 64 | 76 |
| CF4 optic | 50:1 | 20 | 19.5 | 19 | 18.4 | 18 | 16.5 | 15 | 14 | 13 | 11.5 | 10 | 9 | 12 | 19 | 25 | 32 |
| distance in mm | | 0 | 40 | 50 | 70 | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 600 | 700 | 800 |



Product identification

CSL - SF50 Focus [SF50 / CF1 / CF2 / CF3 / CF4]
thermoMETER CSLaser

Product identification

CSLM - 2 H SF300 Focus [SF300 / CF1 / CF2 / CF3 / CF4]
Temperature range [H]
Spectral range [8-14µm / 1.6µm]
thermoMETER CSLaser

| Model | CSL-SF50 | CSLHS-SF50 | CSLM-2LSF150 | CSLM-2HSF300 |
|-----------------------------------|---|----------------|---------------------------------------|-----------------|
| Optical resolution | 50:1 | | 150:1 | 300:1 |
| Temperature range ¹ | -30°C to 1000°C | -20°C to 150°C | 250°C to 800°C | 385°C to 1600°C |
| Spectral range | 8 to 14µm | | 1.6µm | |
| System accuracy ³ | ±1% or ±1°C | | ±(0.3% of reading + 2°C) ⁴ | |
| Repeatability ³ | ±0.5% or ±0.5°C | | ±(0.1% of reading + 1°C) ⁴ | |
| Temperature resolution | 0.1°C | 0.025°C | 0.1°C | |
| Response time (90% signal) | 150ms | | 10ms | |
| Emissivity/Gain ¹ | 0.100 - 1.100 | | | |
| IR window correction ² | 0.100 - 1.100 | | | |
| Signal processing ² | peak hold, valley hold, average; extended hold function with threshold and hysteresis | | | |
| Outputs/analogue | 4 to 20mA | | | |
| Alarm output | 0 to 30V / 500mA (open collector) | | | |
| Outputs/digital (optional) | uni-/ bidirectional, 9.6 kBaud, 0/3V digital level, USB | | | |
| Output impedances | max. 1000Ω (depending on supply voltage) | | | |
| Current draw (Laser) | 45mA at 5V / 20mA at 12V / 12mA at 24V | | | |
| Power supply | 5 to 28VDC | | | |
| Laser | class II (635nm), 1mW, ON/OFF via software | | | |
| Environmental rating | IP 65 (NEMA-4) | | | |
| Ambient temperature | -20°C to 85°C (50°C if Laser ON) | | | |
| Storage temperature | -40°C to 85°C | | | |
| Relative humidity | 10 to 95%, non condensing | | | |
| Vibration | IEC 68-2-6: 3G, 11 to 200Hz, any axis | | | |
| Shock | IEC 68-2-27: 50G, 11ms, any axis | | | |
| Weight | 600g | | | |

¹ adjustable via programming keys or software

² adjustable via software

³ at ambient temperature 23 ±5°C; whichever is greater; temperature of the object >0°C

⁴ ε = 1, response time 1s

Optical specifications thermoMETER CSLaser

□ = smallest spot size (mm)

| Standard Fokus | | | | | | | | | | | | | | | |
|-----------------------|--------------|----|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 2H SF | 300:1 | 20 | 17.8 | 15.5 | 13.2 | 11 | 8.6 | 6.4 | 4.8 | 3.7 | 5.5 | 8.6 | 11.8 | 17 | 26.6 |
| 2L SF | 150:1 | 20 | 18.3 | 16.5 | 14.8 | 13 | 11.4 | 9.6 | 8.5 | 7.3 | 9.8 | 13.5 | 17.3 | 23.5 | 34.6 |
| <i>distance in mm</i> | | 0 | 150 | 300 | 450 | 600 | 750 | 900 | 1000 | 1100 | 1200 | 1350 | 1500 | 1750 | 2200 |
| Close Fokus | | | | | | | | | | | | | | | |
| 2H CF2 | 300:1 | 20 | 13.5 | 7 | 0.5 | 7.3 | 14 | 21 | n.v. | 34.5 | n.v. | 48.2 | 61.8 | 75.4 | 89 |
| 2L CF2 | 150:1 | 20 | 13.7 | 7.3 | 1 | 8 | 15 | 22 | n.v. | 36 | n.v. | 50 | 64 | 78 | 92 |
| 2H CF3 | 300:1 | 20 | 15.2 | 10.3 | 5.5 | 0.7 | 5.8 | 11 | n.v. | 21.2 | n.v. | 31.5 | 41.8 | 52.1 | 62.4 |
| 2L CF3 | 150:1 | 20 | 15.4 | 10.7 | 6 | 1.3 | 6.7 | 12 | n.v. | 22.6 | n.v. | 33.3 | 44 | 55 | 65 |
| 2H CF4 | 300:1 | 20 | 18 | 16 | 13.8 | 11.8 | 9.7 | 7.6 | 5.6 | 3.5 | 1.5 | 3.8 | 8.6 | 13.3 | 18 |
| 2L CF4 | 150:1 | 20 | 18.1 | 16.3 | 14.4 | 12.5 | 10.6 | 8.7 | 6.8 | 4.9 | 3 | 5.6 | 10.7 | 12.8 | 21 |
| <i>distance in mm</i> | | 0 | 50 | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 600 | 700 | 800 |
| Far Focus optics | | | | | | | | | | | | | | | |
| 2H FF | 300:1 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13.4 | 12 | 16.5 | 24.4 | 33.4 | 40 | |
| 2L FF | 150:1 | 20 | 20.5 | 21 | 21.5 | 22 | 22.5 | 23 | 23.4 | 24 | 29 | 41 | 53.4 | 62.5 | |
| <i>distance in mm</i> | | 0 | 450 | 900 | 1350 | 1800 | 2250 | 2700 | 3000 | 3600 | 4000 | 5000 | 6000 | 6750 | |



LASER RADIATION
DO NOT STARE IN THE BEAM
CLASS 2 LASER
EN60825-1:2002
P≤1mW, λ=635nm

Accessories page 56 - 57

- ▶ Mounting bracket
- ▶ Air purge collar
- ▶ Rail mount adapter for controller
- ▶ Water cooled housing
- ▶ Certificate of calibration
- ▶ USB Kit (TM-USBK-CS) page 57



thermoMETER CS


This self contained, non contact infrared temperature sensor requires no external signal condition controller, which makes it an ideal product for OEM applications. It is fully programmable via the digital interface and provides an accurate temperature reading via the analogue or digital interface.

- Measuring range from -40 to 400°C
- Robust precision silicon optics with AR coating
- Integrated controller with LED alarm indicator and smart electronic sighting support, selfdiagnostic or temperature code indication
- Up to 80°C ambient temperature without cooling
- Short circuit and reverse polarity protection
- Field programmable
- Several outputs: 0-10 V or 0-5 V free scalable, thermocouple type K, alarmoutput or digital output
- USB programming interface and software, direct serial 9.6 kBaud interface
- Wide input range: 5 - 30VDC
- Please note: available from 10 pieces

Optical specifications thermoMETER CS

□ = smallest spot size (mm)

| Standard Focus optics | | | | | | | | | | |
|--|-------------|---|-----|-----|-----|-----|-----|-----|-----|-----|
| SF15 | 15:1 | 7 | 8 | 13 | 20 | 27 | 33 | 40 | 47 | 53 |
| distance in mm | | 0 | 100 | 200 | 300 | 400 | 500 | 600 | 700 | 800 |
| Close Focus optics (CF lense optional available) | | | | | | | | | | |
| CF15 | 15:1 | 7 | 5 | 0.8 | 5 | 11 | 16 | 21 | 27 | 32 |
| distance in mm | | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 |



Product identification

CS - SF15 - C1

Cable length [1m (standard) / 3m / 8m / 15m]
 Focus [SF]
 thermoMETER CS

| Model | CS-SF15-C1 | CSTK-SF15-C1 |
|-------------------------------------|--|---|
| Optical resolution | 15:1 | |
| Temperature range ¹ | -40 to 400°C | |
| Spectral range | 8 to 14µm | |
| System accuracy ² | ±1.5% or ±1.5°C | |
| Repeatability ² | ±0.75% or ±0.75°C | |
| Temperature resolution ³ | ±0.1°C | |
| Response time | 25ms to 999s (90%), adjustable | |
| Emissivity/gain | 0.100 to 1.100 (adjustable via 0 to 5V DC input or software) | |
| Transmissivity/gain ¹ | 0.100 to 1.100 | |
| Signal processing ¹ | peak hold, valley hold, average; extended hold function with threshold and hysteresis | |
| Certificate of calibration | optional | |
| Outputs/analogue | 0 to 5V or 0 to 10V 1/10/100mV/ °C | additional thermocouple type K 0 to 5V or 0 to 10V |
| Output/alarm | 0 to 30V / 50mA (open collector) | |
| 3-state alarm output | adjustable threshold values and voltage level for: no alarm, pre-alarm, alarm | |
| Outputs/digital optional | uni/bidirectional, 9.6 kBaud, 0/3V digital level/USB optional | |
| LED functions | alarm indication, automatic aiming support, self diagnostic, temperature indication (via temp. code) | |
| Inputs | programmable functional input for external emissivity/ambient temperature adjustment (0 to 5VDC), hold function or RS232 / USB (optional) communication | |
| Cable length | 1m (standard), 3m, 8m, 15m | |
| Power supply | 4mA (without LED), 10mA (5 to 30VDC) | |
| Environmental rating | IP 63 (NEMA-4) | |
| Ambient temperature | -20°C to 80°C | |
| Storage temperature | -20°C to 85°C | |
| Relative humidity | 10 to 95%, non condensing | |
| Vibration | IEC 68-2-6: 3G, 11 to 200Hz, any axis | |
| Shock | IEC 68-2-27: 50G, 11ms, any axis | |
| Weight | 58g | |

¹ adjustable via software

² ± ambient temperature: 23 ±5°C; whichever is greater; object temperature ≥0°C

³ temperature of the object <100°C and time constant >0.2s

Accessories page 56 - 57

- ▶ CF lense
- ▶ Protective window
- ▶ Mounting bracket / Mounting bolt
- ▶ Air purge collar
- ▶ Right angle mirror
- ▶ Software CompactConnect
- ▶ USB Kit



thermoMETER CSmicro

This non contact infrared temperature sensor is the world's smallest IR instrument. With just the compact optical head left, this instrument is perfect for the integration in space restricted applications. The electronic is miniaturised and integrated inside the sensor cable. The CSmicro is fully programmable and is available in four basic models, where each has a unique feature to succeed in the most challenging applications.

- Measuring range from -40 to 1030°C
- Up to 120°C ambient temperature without cooling (sensing head)
- Robust precision silicon optics with AR coating
- Integrated controller with LED alarm indicator and smart electronic sighting support, selfdiagnostic or temperature code indication
- Micro electronics integrated into the cable, field programmable; adjustable emissivity
- Scalable 4-20mA analogue output / additional simultaneous alarm output
- Short circuit and reverse polarity protection
- Programmable controller
- Optional USB programming interface and software


Optical specifications thermoMETER CSmicro

□ = smallest spot size (mm)

| Standard focus optics | | | | | | | | | | |
|--|-------------|---|-----|-----|-----|-----|-----|-----|-----|-----|
| SF02 | 2:1 | 5 | 50 | 100 | 150 | 200 | 250 | 300 | 350 | 400 |
| SF15 | 15:1 | 7 | 8 | 13 | 20 | 27 | 33 | 40 | 47 | 53 |
| distance (mm) | | 0 | 100 | 200 | 300 | 400 | 500 | 600 | 700 | 800 |
| Close focus optics (CF lense optional available) | | | | | | | | | | |
| CF02 | 2:1 | 7 | 5.6 | 4.3 | 3 | 2.6 | 2.6 | 3 | 4.7 | 6.3 |
| CF15 | 15:1 | 7 | 5 | 0.8 | 5 | 11 | 16 | 21 | 27 | 32 |
| distance (mm) | | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 |

Product identification

CSmi - SF15 - C1
 Cable length
 Fokus [SF / CF]
 thermoMETER CSmi



| Model | CSmi-SF02-C1 | CSmi-SF15-C1 | CSmiHS-SF15-C4 |
|----------------------------------|--|--------------|---|
| Optical resolution | 2:1 | 15:1 | 15:1 |
| Temperature range | -40°C to 1030°C ¹ | | -20°C to 150°C |
| Spectral range | 8 to 14µm | | |
| System accuracy | ±1.5% or ±1.5°C ³ | | ±1.0% or ±1.0°C ⁴ |
| Repeatability | ±0.75% or ±0.75°C ³ | | ±0.3% or ±0.3°C ⁴ |
| Temperature coefficient | ± 0.05 K/K or ± 0.05% K ⁵ | | |
| Temperature resolution | 0.1°C ⁶ | | 0.025°C ⁶ |
| Response time (90%) | 30ms (adjustable up to 999s via optional programming device) | | 150ms (adjustable up to 999s via optional programming device) |
| Emissivity/gain | 0.100 to 1.100 ² | | 0.100 to 1.100 ¹ |
| Transmissivity/gain ¹ | 0.100 to 1.100 | | |
| Signal processing ¹ | peak hold, valley hold, average; extended hold function with threshold and hysteresis | | |
| Dimensions controller | length 35mm; ø12mm | | |
| Outputs/analogue | 0 to 5V or 0 to 10V 1/10/100 mV/°C | | 4 to 20mA |
| Loop resistance | - | | 1000Ω ⁷ |
| Outputs/alarm | Alarm (50mA / 24V) | | 0-30V / 500mA (open collector) |
| Outputs/digital (optional) | uni/bidirectional, 9.6 kBaud, 0/3V digital level/USB optional | | |
| Inputs | programmable functional input for external emissivity adjustment (0 - 5VDC), hold function or USB communication | | programmable functional input for triggered signal output or peak-hold function |
| LED functions | alarm indication, automatic aiming support, self diagnostic, temperature indication (via temp. code) | | |
| Cable length | 1m (standard); 0.5m between sensor and controller; 0.4m between controller and terminal | | 4m (0.5m sensor-controller) sensor with massive housing TM-MHS-CT ø29.5mm x 55mm |
| Power supply | 9mA (5 to 30VDC) | | 4...20mA (5 to 30VDC) |
| Environmental rating | IP 65 (NEMA-4) sensor head | | |
| Ambient temperature | Sensor: -20°C to 120°C Controller: -20°C to 80°C | | Sensor -20°C to 75°C Controller: -20°C to 75°C |
| Storage temperature | -40°C to 85°C (sensor and controller) | | |
| Relative humidity | 10 - 95%, non condensing | | |
| Vibration | IEC 68-2-6: 3G, 11-200Hz, any axis | | |
| Shock | IEC 68-2-27: 50G, 11ms, any axis | | |
| Weight | 42g | | 200g |

¹ adjustable via software² adjustable via 0 - 5VDC input or software³ ± at ambient temperature 23±5°C; object temperature >0°C; whichever is greater⁴ ± at ambient temperature 23±5°C; object temperature >20°C; whichever is greater⁵ object temperature <100°C; and time constant >0.2s⁶ object temperature > 20°C; and time constant >0.2s⁷ in dependence on supply voltage

Accessories page 56 - 57

- ▶ CF lense
- ▶ Protective window
- ▶ Mounting bracket / Mounting bolt

- ▶ Air purge collar
- ▶ Right angle mirror
- ▶ USB Kit



thermoMETER CSmicro 2W

This non contact two-wire infrared temperature sensor is the world's smallest IR instrument. With just the compact optical head left, this instrument is perfect for the integration in space restricted applications. The electronic is miniaturised and integrated inside the sensor cable. The CSmicro is fully programmable and is available in several basic models, where each has a unique feature to succeed in the most challenging applications.

- Measuring range from -40 to 1600°C
- Up to 180°C ambient temperature without cooling (sensing head)
- Robust precision silicon optics with AR coating
- Integrated controller with LED alarm indicator and smart electronic sighting support, selfdiagnostic or temperature code indication
- Micro electronics integrated into the cable, field programmable; adjustable emissivity
- Scalable 4-20 mA analogue output / additional simultaneous alarm output
- Short circuit and reverse polarity protection
- Optional USB programming interface and software

Optical specifications thermoMETER CSmicro 2W


□ = smallest spot size (mm)

| Standard focus optics | | | | | | | | | | |
|---|-------------|-----|-----|-----|-----|------|------|------|------|------|
| SF15 | 15:1 | 7 | 8 | 13 | 20 | 27 | 33 | 40 | 47 | 53 |
| SF22 | 22:1 | 7 | 7 | 9 | 14 | 18 | 23 | 27 | 32 | 36 |
| distance (mm) | | 0 | 100 | 200 | 300 | 400 | 500 | 600 | 700 | 800 |
| SF40 | 40:1 | 7 | 7 | 10 | 15 | 20 | 25 | 30 | 35 | 40 |
| SF75 | 75:1 | 7 | 7 | 7 | 8 | 11 | 14 | 17 | 20 | 23 |
| distance (mm) | | 0 | 200 | 400 | 600 | 800 | 1000 | 1200 | 1400 | 1600 |
| Close focus optics (CF lense optional available) | | | | | | | | | | |
| CF15 | 15:1 | 7 | 5 | 0.8 | 5 | 11 | 16 | 21 | 27 | 32 |
| CF22 | 22:1 | 7 | 4 | 0.6 | 4 | 8 | 12 | 16 | 20 | 24 |
| distance (mm) | | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 |
| Close focus optics (Integrated CF lense in the sensor head) | | | | | | | | | | |
| CF40 | 40:1 | 6.5 | 4.5 | 2.7 | 6 | 10.3 | 14.5 | 18.6 | 22.8 | 27 |
| CF75 | 75:1 | 6.5 | 3.8 | 1.5 | 4.4 | 8.1 | 11.7 | 15.4 | 19 | 22.6 |
| distance (mm) | | 0 | 60 | 110 | 150 | 200 | 250 | 300 | 350 | 400 |

Product identification

CSmi2W - SF15 - C1

Cable length
Fokus [SF / CF]
thermoMETER CSmi2W (TwoWire sensor)

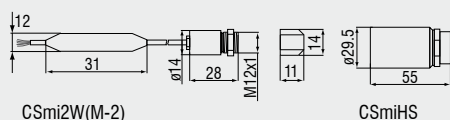

| Model | CSmi2W-SF15-C1 | CSmi2W-SF15H-C1 | CSmi2W-SF22H-C1 | CSmi2WM-2SF40-C1 | CSmi2WM-2SF75-C1 |
|----------------------------------|--|---|-----------------|---|------------------------------|
| Optical resolution | 15:1 | | 22:1 | 40:1 | 75:1 |
| Temperature range | -40°C to 1030°C ¹ | | | 250°C to 800°C ¹ | 385°C to 1600°C ¹ |
| Spectral range | 8 to 14µm | | | 1.6µm | |
| System accuracy | ± 1.0% or ± 1.5°C ³ | | | ± (0.3% of reading + 2°C) ⁴ | |
| Repeatability | ± 0.5% or ± 0.75°C ³ | | | ± (0.1% of reading + 1°C) ⁴ | |
| Temperature coefficient | ± 0.05 K/K or ± 0.05% K ⁵ | | | | |
| Temperature resolution | 0.1°C ⁶ | | | | |
| Response time (90%) | 30ms | 150ms | | 10ms | |
| Emissivity/gain | 0.100 to 1.100 ² | | | | |
| Transmissivity/gain ¹ | 0.100 to 1.100 | | | | |
| Signal processing ¹ | peak hold, valley hold, average; extended hold function with threshold and hysteresis | | | | |
| Dimensions controller | length 35mm; ø12mm | | | | |
| Outputs/analogue | 4 to 20mA | | | | |
| Loop resistance | 1000Ω ⁷ | | | | |
| Outputs/alarm | 0-30V / 500mA (open collector) | | | | |
| Outputs/digital (optional) | uni/bidirectional, 9.6 kBaud, 0/3V digital level/USB optional | | | | |
| Inputs | programmable functional input for triggered signal output or peak-hold function | | | | |
| LED functions | alarm indication, automatic aiming support, self diagnostic, temperature indication (via temp. code) | | | | |
| Cable length | 1m (standard); 0.5m between sensor and controller; 0.4m between controller and terminal | | | | |
| Power supply | 4...20mA (5 to 30VDC) | | | | |
| Environmental rating | IP 65 (NEMA-4) sensor head | | | | |
| Ambient temperature | Sensor: -20°C to 120°C Controller: -20°C to 75°C | Sensor: -20°C to 180°C Controller: -20°C to 75°C | | Sensor: -20°C to 125°C Controller: -20°C to 75°C | |
| Storage temperature | -40°C to 85°C (sensor and controller) | | | | |
| Relative humidity | 10 - 95%, non condensing | | | | |
| Vibration | IEC 68-2-6: 3G, 11-200Hz, any axis | | | | |
| Shock | IEC 68-2-27: 50G, 11ms, any axis | | | | |
| Weight | 42g | | | | |

¹ adjustable via software² adjustable via 0 - 5VDC input or software³ ± at ambient temperature 23±5°C; object temperature >0°C; whichever is greater⁴ Epsilon =1, response time 1s; object temperature >450°C⁵ object temperature <100°C; and time constant >0.2s⁶ object temperature > 20°C; and time constant >0.2s⁷ in dependence on supply voltage

Accessories page 56 - 57

- ▶ CF lense
- ▶ Protective window
- ▶ Mounting bracket / Mounting bolt
- ▶ Air purge collar
- ▶ Right angle mirror
- ▶ USB Kit



thermoMETER CX


This self contained, non contact infrared temperature sensor requires no external signal condition controller, which makes it an ideal product for OEM applications. It is fully programmable via the digital interface and provides an accurate temperature reading via the analogue or digital interface. The larger head size yields extra stable and precise measurement in harsh environments and reduces thermal shock.

- Measuring range from -30 to 900°C
- Robust precision silicon optics with AR coating
- Analogue output: 2 wire 4...20mA
- Easy two wire installation
- Wide input range: 5 - 30VDC
- Optical resolution of 15:1 / 22:1
- Field programmable
- Adjustable emissivity
- Response time from 150ms
- Extreme high resolution model HS with 25mK NEDT

Optical specifications thermoMETER CX

□ = smallest spot size (mm)

| Standard Focus optics | | | | | | | | | | |
|-----------------------|-------------|---|-----|-----|-----|-----|-----|-----|-----|-----|
| SF15 | 15:1 | 7 | 8 | 13 | 20 | 27 | 33 | 40 | 47 | 53 |
| SF22 | 22:1 | 7 | 7 | 9 | 14 | 18 | 23 | 27 | 32 | 36 |
| distance in mm | | 0 | 100 | 200 | 300 | 400 | 500 | 600 | 700 | 800 |
| Close Focus optics | | | | | | | | | | |
| CF15 | 15:1 | 7 | 5 | 0.8 | 5 | 11 | 16 | 21 | 27 | 32 |
| CF22 | 22:1 | 7 | 4 | 0.6 | 4 | 8 | 12 | 16 | 20 | 24 |
| distance in mm | | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 |



Product identification

CX - SF15 - C8
 Cable length [8 m]
 Focus [SF / CF]
 thermoMETER CX

| Model | CX-SF15-C8 | CX-SF22-C8 |
|--------------------------------|---|-----------------|
| Optical resolution | 15:1 | 22:1 |
| Temperature range ¹ | -20°C to 150°C | -30°C to 900°C |
| Spectral range | 8 to 14μm | |
| System accuracy ² | ±1% or ±1°C | ±1% or ±1.4°C |
| Repeatability ² | ±0.3% or ±0.3°C | ±0.5% or ±0.7°C |
| Temperature resolution | 0.025°C ³ | 0.1°C |
| Response time | 150ms (95%) | |
| Emissivity/gain ¹ | 0.100 to 1.100 | |
| Transmissivity ¹ | 0.100 to 1.100 | |
| Signal processing ¹ | peak hold, valley hold, average; extended hold function with threshold and hysteresis | |
| Output /analogue | 4 to 20mA | |
| Alarm output | 0 to 30V/ 500mA (open collector) | |
| Outputs/digital (optional) | USB | |
| Loop impedance | max. 1000Ω (depends on supply voltage) | |
| Cable length | 8m | |
| Power supply | 5 to 30VDC | |
| Environmental rating | IP 65 (NEMA-4) | |
| Ambient temperature | -20°C to 75°C | |
| Storage temperature | -40°C to 85°C | |
| Relative humidity | 10 to 95%, non condensing | |
| Vibration | IEC 68-2-6: 3G, 11 to 200Hz, any axis | |
| Shock | IEC 68-2-27: 50G, 11ms, any axis | |
| Weight | 350g | |

¹ adjustable via software


² ± object temperature >0°C; at ambient temperature 23±5°C; whichever is greater

³ at object temperature <100°C and time constant >0.2s

Accessories page 56 - 57

- ▶ CF lens
- ▶ Protective window
- ▶ Air purge collar
- ▶ USB Kit



CSLaser

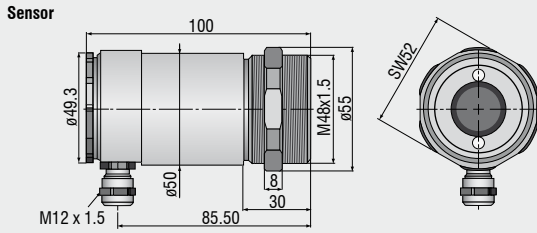

CS

sensor with integrated controller

CF lense

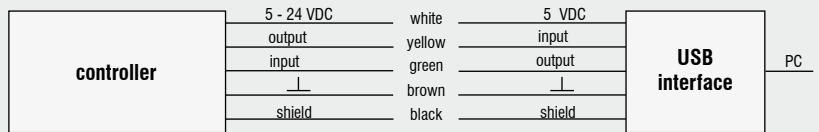
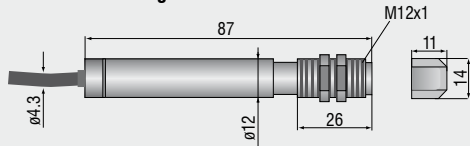


CSmicro / CSmicro 2W



CF lense

sensor

controller inside cable

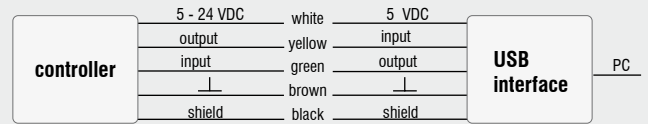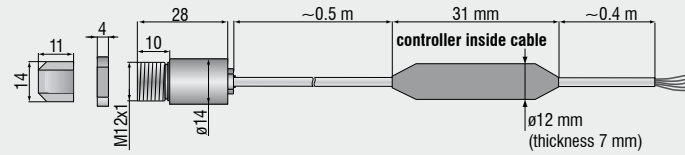

CX

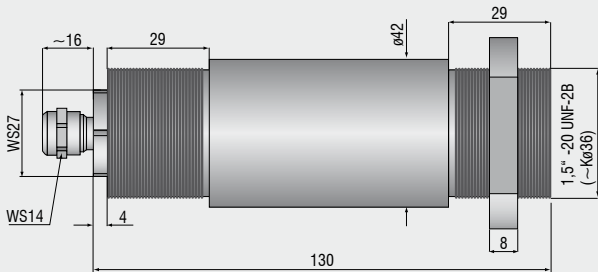

Mechanical accessories CS / CSmicro / CSmicro 2W

| Art. No. | Model | Description |
|----------|-------------|--|
| 2970279 | TM-FB-CS | Mounting bracket, fixed |
| 2970280 | TM-AB-CS | Mounting bracket, adjustable |
| 2970281 | TM-MB-CS | Mounting bolt with M12x1 thread |
| 2970282 | TM-MG-CS | Mounting fork, adjustable in 2 axes, with thread M12x1 |
| 2970283 | TM-AP-CS | Air purge collar for 10:1 sensors |
| 2970284 | TM-APL-CS | Air purge collar, laminar |
| 2970285 | TM-APLCF-CS | Air purge collar, laminar, integrated CF-lens |
| 2970286 | TM-RAM-CS | Right angle mirror for 90°C measurements |
| 2970287 | TM-USBK-CS | USB interface kit incl. software CompactConnect |

Optical accessories CS / CSmicro / CSmicro 2W

| | | |
|---------|----------|---------------------------------|
| 2970277 | TM-CF-CS | CF-Lens for CS series |
| 2970278 | TM-PW-CS | Protective window for CS series |

Calibration CS / CSmicro / CSmicro 2W

| | | |
|---------|------------|----------------------------|
| 2970288 | TM-CERT-CS | Certificate of calibration |
|---------|------------|----------------------------|

Mechanical accessories CX


| Art. No. | Model | Description |
|----------|------------|---|
| 2970307 | TM-AP-CX | Air purge collar, aluminium (anodized) |
| 2970321 | TM-FB-CX | Mounting bracket, adjustable in one axis, stainless steel |
| 2970322 | TM-AB-CX | Mounting bracket, adjustable in two axes, stainless steel |
| 2970311 | TM-USBK-CX | USB-Kit: USB programming adapter, Software CompactConnect |

Optical accessories CX


| | | |
|---------|----------|--------------------------------------|
| 2970302 | TM-CF-CX | CF-lens for thermoMETER CX |
| 2970303 | TM-PW-CX | Protective window for thermoMETER CX |

Calibration CX


| | | |
|---------|------------|----------------------------|
| 2970323 | TM-CERT-CX | Certificate of calibration |
|---------|------------|----------------------------|




TM-FB-CS Mounting bracket, fixed




TM-MG-CS Mounting fork with M 12x1 thread adjustable in two axes




TM-CF-CS Close Focus Lens (LT sensors only)




TM-AP-CS Air purge collar for 10:1 sensors




TM-MB-CS Mounting bolt with M12x1 thread adjustable




TM-APL-CS Air purge collar




TM-APLCF-CS Air purge collar, laminar, integrated CF-lens




TM-APL-CS Laminar air purge collar and TM-MG-CS Mounting fork

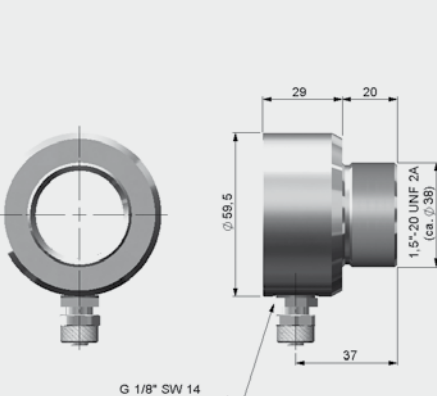

TM-AP-CX Air purge collar CX sensors

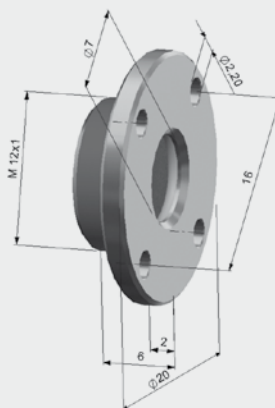

TM-CF-CX CF-Lens
TM-PW-CX Protective window




TM-RAM-CS Right angle mirror



thermoMETER LS Infrared thermometer with crosshair laser sighting

The LS is the most sophisticated IR hand held device. It provides an accurate measurement with its precision optics (adjustable for close or far field focus) and marks the actual true measurement with a laser crosshair, eliminating the guesswork out of handheld IR devices. It is fully programmable, offers a digital interface for on and offline data logging and includes a thermocouple plug in.

- Measuring range from -35° to +900°C
- The new performance standard with spot sizes as small as 1mm
- Crosshair laser sighting marks the actual spot size at any distance
- Optical resolution 75:1
- Response time 150ms
- Thermocouple input
- USB interface and graphic software with oscilloscope function
- Multi function flip display
- Programmable emissivity
- High and low limits
- Statistical data processing

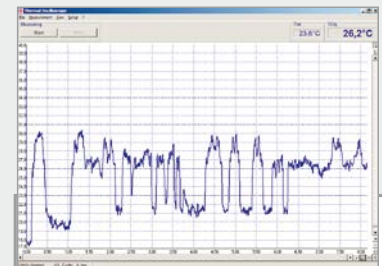

Optical specifications thermoMETER LS

□ = smallest spot size (mm)

| | | | | | | | |
|-----------------------|---------|----------------|----|------|------|------|------|
| Standard Focus optics | 75:1 | 20 | 16 | 40 | 70 | 100 | 130 |
| | | distance in mm | 0 | 1200 | 2000 | 3000 | 4000 |
| Close Focus optics | CF 75:1 | 17 | 1 | 123 | 262 | | |
| | | distance in mm | 0 | 62 | 500 | 1000 | |

Flip display for multi purposes:

Measurement of smallest objects (1mm) on a circuit board - data transfer via USB to a common PC

| Model | thermoMETER LS |
|-----------------------------------|--|
| Optical resolution | 75:1 |
| Temperature range | -35 to 900°C |
| Spectral response | 8 to 14µm |
| System accuracy | ±0.75°C or ±0.75% ¹⁾ |
| Temperature coefficient | ±0.05°C or ±0.05% ¹⁾ |
| Response time (95%) | 150ms |
| Repeatability | ±0.5°C or ±0.5% ¹⁾ |
| Switchable to focus | 1mm @ 62mm (90%) |
| Smallest spot | 1mm |
| Laser class II | standard focus: patented crosshair laser (crosshair size = IR spot size@any distance) close focus: two point laser (laser dot size = IR spot size@focus distance) |
| Emissivity/gain | 0.100 to 1.100 (adjustable) |
| Configurations | MAX/MIN/HOLD/DIF/AVG/°C/°F |
| Alarm functions | audible and visible HIGH/LOW alarm |
| Display | LC flip display (horizontal and vertical viewing directions controlled by position sensor) |
| Display LCD backlight | green and alarm colours (red, blue) |
| Bar graph display | auto scaling |
| Ambient temperature | 0 to 50°C |
| Storage temperature | -30 to 65°C |
| Relative humidity | 10 - 95% (non condensing) |
| Weight | 420g |
| EMV | 89/336/EWG |
| Vibration/Shock | IEC 68-2-6: 3G, 11-200Hz, any axis IEC 68-2-27: 50G, 11ms duration, any axis |
| Temperature range t/c probe input | -35 to 900°C (-30 to 1650°F) |
| Accuracy t/c probe input | ±0.75°C or ±1% of reading ¹⁾ |
| Interface, data output | USB |
| Data memory | 100 measurement protocols with time stamps, customizable 4 digit location and material names |
| Software | CompactConnect oscilloscope software with 20 readings per second |
| Power | battery 2xAA Alkaline or via USB |
| Battery life time | 5h with laser on and 50% backlight use 10h with laser on and w/o backlight 25h w/o laser and backlight |
| Tripod mount | 1/4-20 UNC |
| Option | certificate of calibration or DKD certificate |

¹⁾ whichever is greater; ± at ambient temperatures 23 ±5°C; 20 to 900°C range

Scope of supply

- ▶ thermoMETER LS
- ▶ USB cable and software
- ▶ t/c type K insertion probe
- ▶ carrying case
- ▶ padded pouch
- ▶ wrist strap
- ▶ manual
- ▶ cells

| Index | Datum | Uhrzeit | TObj | Min. TObj | Max. TObj | Mittl. TObj | Tint | TExt | Hi-Alarm | Lo-Alarm | Eps | Name |
|-------|------------|----------|---------|-----------|-----------|-------------|--------|--------|----------|----------|-------|------|
| 1 | 14.10.2005 | 20:58:14 | 25.8°C | 25.8°C | 25.9°C | 25.8°C | 26.0°C | 25.7°C | 29.7°C | -40.0°C | 0.946 | PO00 |
| 2 | 14.10.2005 | 20:13:50 | 26.8°C | 26.8°C | 29.8°C | 27.9°C | 27.3°C | | 28.7°C | -40.0°C | 0.946 | PO01 |
| 3 | 14.10.2005 | 20:58:24 | 26.0°C | 25.6°C | 26.0°C | 25.8°C | 26.0°C | 25.7°C | 29.7°C | -40.0°C | 0.946 | PO02 |
| 4 | 14.10.2005 | 20:58:28 | 25.7°C | 25.6°C | 25.8°C | 25.7°C | 26.0°C | 25.8°C | 29.7°C | -40.0°C | 0.946 | LH12 |
| 5 | 14.10.2005 | 20:58:58 | 25.5°C | 25.5°C | 25.8°C | 25.6°C | 26.0°C | 25.9°C | 29.7°C | -40.0°C | 0.946 | PO04 |
| 6 | 14.10.2005 | 20:17:20 | 599.6°C | 29.2°C | 600.5°C | 538.2°C | 27.2°C | | 28.7°C | -40.0°C | 0.947 | PO05 |
| 7 | 14.10.2005 | 20:14:06 | 26.8°C | 26.8°C | 29.8°C | 27.9°C | 27.3°C | | 28.7°C | -40.0°C | 0.946 | PO06 |
| 8 | 18.10.2005 | 13:16:46 | 22.3°C | 22.0°C | 23.0°C | 22.4°C | 25.6°C | | 900.0°C | -40.0°C | 1.000 | PO07 |
| 9 | 19.10.2005 | 17:05:06 | 23.0°C | 21.3°C | 23.2°C | 22.6°C | 26.8°C | | 900.0°C | -40.0°C | 0.999 | PO08 |
| 10 | 19.10.2005 | 17:05:12 | 23.0°C | 21.3°C | 23.2°C | 22.6°C | 26.8°C | | 900.0°C | -40.0°C | 0.999 | PO09 |
| 11 | 19.10.2005 | 17:05:28 | 34.6°C | 24.8°C | 34.6°C | 28.8°C | 26.8°C | | 900.0°C | -40.0°C | 0.999 | PO10 |
| 12 | 20.10.2005 | 13:50:46 | 24.6°C | 24.2°C | 26.0°C | 24.5°C | 27.1°C | | 30.0°C | -40.0°C | 1.000 | PO11 |
| 13 | 20.10.2005 | 13:28:25 | 24.1°C | 24.1°C | 24.3°C | 24.1°C | 27.0°C | | 29.1°C | -40.0°C | 0.950 | PO12 |
| 14 | 20.10.2005 | 13:51:13 | 51.1°C | 21.0°C | 51.2°C | 37.3°C | 27.1°C | | 30.0°C | -40.0°C | 1.000 | PO13 |
| 15 | 20.10.2005 | 13:53:29 | 21.8°C | 21.8°C | 21.9°C | 21.8°C | 27.3°C | | 30.0°C | -40.0°C | 1.000 | PP5L |
| 16 | 20.10.2005 | 18:06:45 | 48.7°C | 24.3°C | 48.6°C | 41.2°C | 24.5°C | | 30.0°C | -40.0°C | 0.950 | PO15 |
| 17 | 20.10.2005 | 18:08:49 | -11.1°C | -11.4°C | 4.8°C | -10.7°C | 24.6°C | | 30.0°C | 10.0°C | 0.950 | PO16 |

Software IRConnect

- Data logging
- Display and recording of temperature graphs
- Modifications of handheld settings

System requirements

- Windows XP, Windows 2000
- USB 2.0
- Hard disc min. 30 MByte
- min. 128 MByte RAM
- CD-ROM drive



thermoMETER MS Intelligent universal infrared thermometer

The MS series offers the most economic IR hand held device. With three different models, it provides the best performance / price ratio for your individual application. With a digital interface data logging and analysis are made really easy.

- Measuring range from -32° to + 760°C
- The new performance standard with spot sizes as small as 1mm
- Laser aiming aid
- Optical resolution 40:1
- Response time 300ms
- USB interface and thermocouple input type K
- Programmable emissivity
- High and low limits

Optical specifications thermoMETER MS

□ = smallest spot size (mm)

| | | | | | |
|---------------------|----------------|-----|-----|-----|------|
| MS / MS Plus | 20:1 | 13 | 20 | 37 | 50 |
| | distance in mm | 140 | 300 | 700 | 1000 |
| MS Pro | 40:1 | 13 | 15 | 22 | 27 |
| | distance in mm | 260 | 400 | 800 | 1000 |

| Model | MS | MS Plus | MS Pro |
|--|--|---|---|
| Optical resolution | 20:1 | | 40:1 |
| Temperature range ¹ | -32°C to 420°C | -32°C to 530°C | -32°C to 760°C |
| Spectral range | 8 to 14µm | | |
| System accuracy ^{2,3} | ±1% / ±1°C (from 0°C to 420°C) | ±1% / ±1°C (from 0°C to 530°C) ±1°C / ±0.07°C / °C (from 0°C to -32°C) | ±1% / ±1°C (from 0°C to 760°C) |
| Repeatability ^{2,3} | ±0.5% / ±0.7°C (from 0°C to 420°C) ±0.7°C±0.05°C / °C (from 0°C to -32°C) | ±0.5% / ±0.7°C (from 0°C to 530°C) | ±0.75% / ±0.75°C (from 0°C to 760°C) ±0.75°C±0.07°C / °C (from 0°C to -32°C) |
| Temperature resolution | 0.2°C | 0.1°C | |
| Response time | 300ms (95%) | | |
| Ambient temperature | 0°C to 50°C | | |
| Storage temperature | -20°C to 60°C without battery | | |
| Emissivity | fixed: 0.95 | 0.1 – 1.1 adjustable | |
| Configurations | Min/Max/Hold/°C/°F | Min/Max/Hold/°C/°F/Offset | |
| Alarm functions | - | Visual and acoustic HIGH-/LOW-alarm | |
| PC Interface, Software, Thermocouple Input | USB interface | USB interface, IRConnect software | USB interface, IRConnect software, thermocouple element type K |
| Laser | <1mW laser class IIa, laser beam with 9mm offset | | |
| Weight/Dimensions | 150g; 190 x 38 x 45mm | | 180g; 190 x 38 x 45mm |
| Battery | 9V alkaline battery | | |
| Battery life | 20h with laser and backlight on 50% 40h with laser and backlight off | | |
| Relative humidity | 10 – 95% RH non condensing, at <30°C ambient temperature | | |
| Standard accessories | - | soft pouch, wrist strap, tripod adapter, rubber protection boot | |
| Optional | certificate of calibration | | |

¹ adjustable via software

² object temperature >0°C; whichever is greater

³ ± at ambient temperature 23 <5°C

| Index | Datum | Uhrzeit | TObj | Min. TObj | Max. TObj | Mittl. TObj | TInt | TExt | HiAlarm | LoAlarm | Eps | Name |
|-------|------------|----------|---------|-----------|-----------|-------------|--------|--------|---------|---------|-------|------|
| 1 | 14.10.2005 | 20:58:14 | 25.8°C | 25.8°C | 25.9°C | 25.8°C | 26.0°C | 25.7°C | 29.7°C | -40.0°C | 0.946 | P000 |
| 2 | 14.10.2005 | 20:13:50 | 26.8°C | 26.8°C | 29.8°C | 27.9°C | 27.3°C | | 28.7°C | -40.0°C | 0.946 | P001 |
| 3 | 14.10.2005 | 20:58:24 | 26.0°C | 25.6°C | 26.0°C | 25.8°C | 26.0°C | 25.7°C | 29.7°C | -40.0°C | 0.946 | P002 |
| 4 | 14.10.2005 | 20:58:28 | 25.7°C | 25.6°C | 25.8°C | 25.7°C | 26.0°C | 25.8°C | 29.7°C | -40.0°C | 0.946 | LH12 |
| 5 | 14.10.2005 | 20:58:58 | 25.5°C | 25.5°C | 25.8°C | 25.6°C | 26.0°C | 25.9°C | 29.7°C | -40.0°C | 0.946 | P004 |
| 6 | 14.10.2005 | 20:17:20 | 599.6°C | 29.2°C | 600.5°C | 538.2°C | 27.2°C | | 28.7°C | -40.0°C | 0.947 | P005 |
| 7 | 14.10.2005 | 20:14:06 | 26.8°C | 26.8°C | 29.8°C | 27.9°C | 27.3°C | | 28.7°C | -40.0°C | 0.946 | P006 |
| 8 | 18.10.2005 | 13:16:46 | 22.3°C | 22.0°C | 23.0°C | 22.4°C | 25.6°C | | 900.0°C | -40.0°C | 1.000 | P007 |
| 9 | 19.10.2005 | 17:05:06 | 23.0°C | 21.3°C | 23.2°C | 22.6°C | 26.8°C | | 900.0°C | -40.0°C | 0.999 | P008 |
| 10 | 19.10.2005 | 17:05:12 | 23.0°C | 21.3°C | 23.2°C | 22.6°C | 26.8°C | | 900.0°C | -40.0°C | 0.999 | P009 |
| 11 | 19.10.2005 | 17:05:28 | 34.6°C | 24.8°C | 34.6°C | 28.8°C | 26.8°C | | 900.0°C | -40.0°C | 0.999 | P010 |
| 12 | 20.10.2005 | 13:50:46 | 24.6°C | 24.2°C | 26.0°C | 24.5°C | 27.1°C | | 30.0°C | -40.0°C | 1.000 | P011 |
| 13 | 20.10.2005 | 13:28:25 | 24.1°C | 24.1°C | 24.3°C | 24.1°C | 27.0°C | | 29.1°C | -40.0°C | 0.950 | P012 |
| 14 | 20.10.2005 | 13:51:13 | 51.1°C | 21.0°C | 51.2°C | 37.3°C | 27.1°C | | 30.0°C | -40.0°C | 1.000 | P013 |
| 15 | 20.10.2005 | 13:53:29 | 21.8°C | 21.8°C | 21.9°C | 21.8°C | 27.3°C | | 30.0°C | -40.0°C | 1.000 | PPSL |
| 16 | 20.10.2005 | 18:06:45 | 48.7°C | 24.3°C | 48.6°C | 41.2°C | 24.5°C | | 30.0°C | -40.0°C | 0.950 | P015 |
| 17 | 20.10.2005 | 18:08:49 | -11.1°C | -11.4°C | 4.8°C | -10.7°C | 24.6°C | | 30.0°C | 10.0°C | 0.950 | P016 |

Schließen Datei Öffnen... Sichern als ... Logger Löschen ...

Software IRConnect

(included with MS Pro series)


- Data logging
- Display and recording of temperature graphs
- Modifications of handheld settings

System requirements

- Windows XP, Windows 2000
- USB 2.0
- Hard disc min. 30 MByte
- min. 128 MByte RAM
- CD-ROM drive

Radiation Thermocouple Elements (Thermopiles)


If the joint between two wires of different metallic material heats up, the thermoelectrical effect results in an electrical voltage. If the connection is warm because of absorbed radiation, this component is called radiation thermocouple. The illustration shows thermocouples made of bismuth/antimony which are arranged on a chip round an absorbing element. In case the temperature of the detector increases, this results in a proportional voltage, which can be caught at the end of the bond isles.



Pyroelectric Detectors

The illustration shows the common construction of a pyroelectric detector. This sensitive element consists of pyroelectric material with two electrodes. The absorbed infrared radiation results in a changed temperature of the sensitive element which leads to a changed surface loading due to the pyroelectric effect. The so created electric output signal is processed by a preamplifier. Due to the nature of how the loading is generated in the pyroelectric element the radiation flow has to be continuously and alternately interrupted. The advantage of the frequency selective preamplifying is a better signal to noise ratio.


Pyroelectric detectors

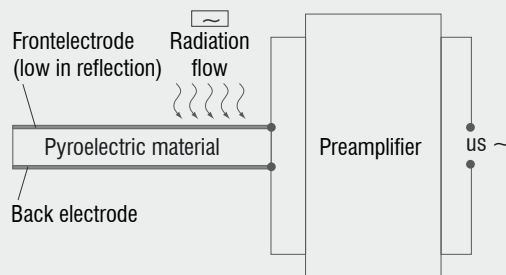

Quantum Detectors

The decisive difference between quantum detectors and thermal detectors is their faster reaction on absorbed radiation. The mode of operation of quantum detectors is based on the photo effect. The striking photons of the infrared radiation lead to an increase of the electrons into a higher energy level inside the semiconductor material. When the electrons fall back an electric signal (voltage or power) is generated. Also a change of the electric resistance is possible. These signals can be analysed in an


exact way. Quantum detectors are very fast (ns to μs). The temperature of the sensitive element of a thermal detector changes relatively slowly. Time constants of thermal detectors are usually bigger than time constants of quantum detectors. Roughly approximated one can say that time constants of thermal detectors can be measured in milliseconds whereas time constants of quantum detectors can be measured in microseconds or even nanoseconds.

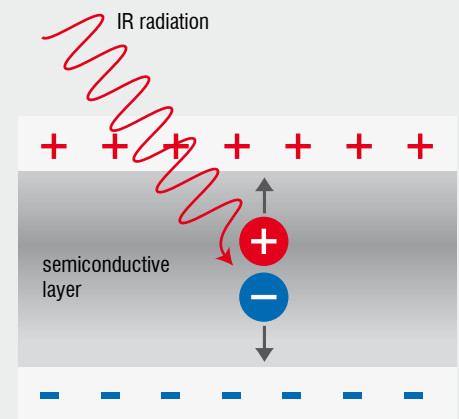

Ratio pyrometer

A 2-colour pyrometer operates analogue to a usual pyrometer in principle, besides measuring at two close wavelengths at the same time. Therefore, two different filter are used in the pyrometer. The results of both measurements are divided, so that the emissivity of the measurement doesn't matter anymore. That means, the influ-


ence of the emissivity is dropped and can be unknown. This principle is very useful at high temperatures like metal processing applications. Smoke or steam have no influence to the measurement. Also the measuring object can be smaller than the measuring spot with this principle.

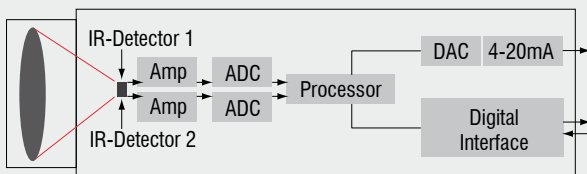


Bolometers

Bolometers use the temperature dependency of the electric resistance. The sensitive element consists of a resistor, which changes when it absorbs heat. The change in resistance leads to a changed signal voltage. The material should have a high temperature factor of the electrical resistance in order to work with high sensitivity and

high specific detectivity. Bolometers which work at room temperature use the temperature coefficient of metallic resistors (e.g. black layer and thin layer bolometer) as well as of semiconductor resistors (e.g. thermistor bolometers).

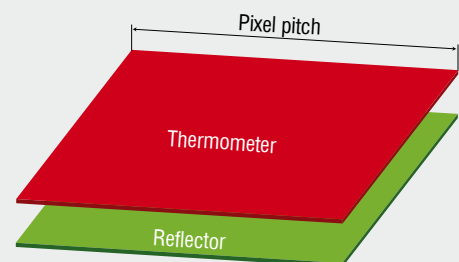

With our eyes we see the world in visible light. Whereas visible light fills only a small part of the radiation spectrum, the invisible light covers most of the remaining spectral range. The radiation of invisible light carries much more additional information.

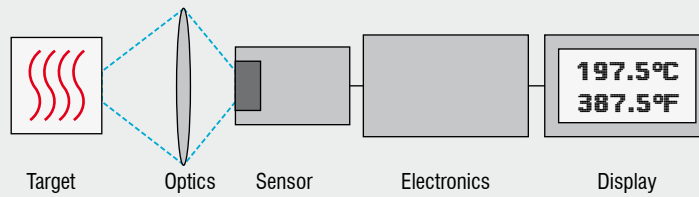

The infrared temperature measurement System

Each body with a temperature above the absolute zero ($-273.15^{\circ}\text{C} = 0$ Kelvin) emits an electromagnetic radiation from its surface, which is proportional to its intrinsic temperature. A part of this so-called intrinsic radiation is infrared radiation, which can be used to measure a body's temperature. This radiation penetrates the atmosphere. With the help of a lens (input optics) the beams are focused on a detector element,

which generates an electrical signal proportional to the radiation. The signal is amplified and, using successive digital signal processing, is transformed into an output signal proportional to the object temperature. The measuring value may be shown in a display or released as analogue output signal, which supports an easy connection to control systems of the process management.

The advantages of non-contact temperature measurement


- Temperature measurements of moving or overheated objects and of objects in hazardous surroundings
- Very fast response and exposure times
- Measurement without interreaction, no influence on the measuring object
- Non-destructive measurement
- Long lasting measurement, no mechanical wear

Construction and operation of infrared thermometers

The illustration shows the general construction of an infrared thermometer. With the help of input optics the emitted object radiation is focused onto an infrared detector. The detector generates a corresponding electrical signal which then is amplified and may be used for further processing. Digital signal processing transforms the signal into an output value proportional to the object temperature. The temperature result is either shown on a display or may be used as analogue signal for further processing. In order to compensate influences from the surroundings a second detector

catches the temperature of the measuring device and of his optical channel, respectively. Consequently, the temperature of the measuring object is mainly generated in three steps:

1. Transformation of the received infrared radiation into an electrical signal
2. Compensation of background radiation from thermometer and object
3. Linearisation and output of temperature information.

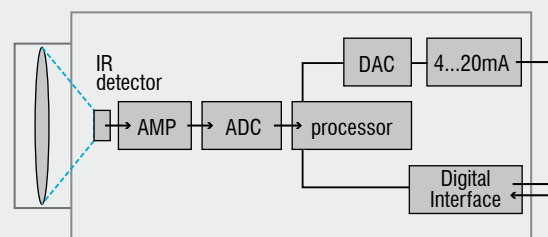

Block diagram of an infrared thermometer

The grey body

Only few bodies meet the ideal of the black body. Many bodies emit far less radiation at the same temperature. The emissivity ε defines the relation of the radiation value in real and of the black body. It is between zero and one. The infrared sensor receives the emitted radiation from the object surface, but also reflected radiation from the surroundings and perhaps penetrated infrared radiation from the measuring object:

$$\varepsilon + \varphi + \tau = 1$$

ε emissivity

φ reflection

τ transmissivity

Most bodies do not show transmissivity in infrared, therefore the following applies:


$$\varepsilon + \varphi = 1$$

This fact is very helpful as it is much easier to measure the reflection than to measure the emissivity.


Emissivity

The formula shows that the emissivity ϵ is of central significance, if you want to determine the temperature with radiation measurement. The emissivity stands for the relation of thermal radiations, which are generated by a grey and a black body at the same temperature. The maximum emissivity for the black body is 1. A grey body is an object, which has the same emissivity at all wavelengths and emits less infrared radiation than a black radiator ($\epsilon < 1$). Bodies with emissivities, which depend on the temperature as well as on the wavelength, are called non grey or selective bodies (e.g. metals).

The emissivity depends on the material, its surface, temperature, wavelength and sometimes on the measuring arrangement. Many objects consisting of nonmetallic material show a high and relatively constant emissivity independent from their surface consistency, at least in longwave ranges. Generally metallic materials show a low emissivity, which strongly depends on the surface consistency and which drop in higher wavelengths.

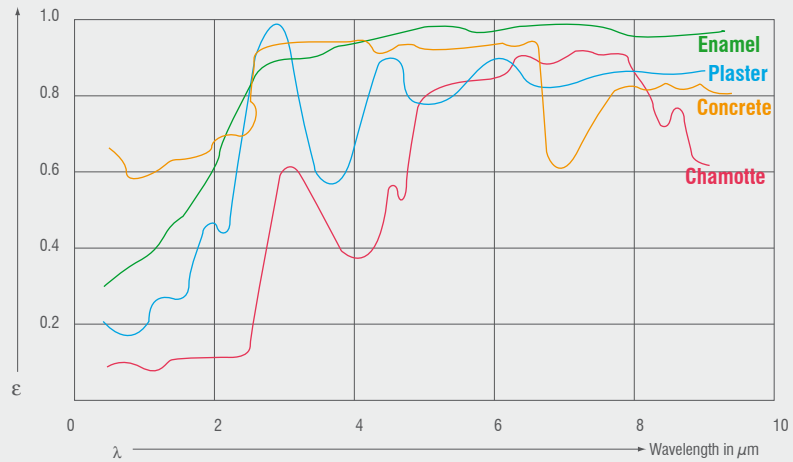

Spectral emissivity of nonmetals

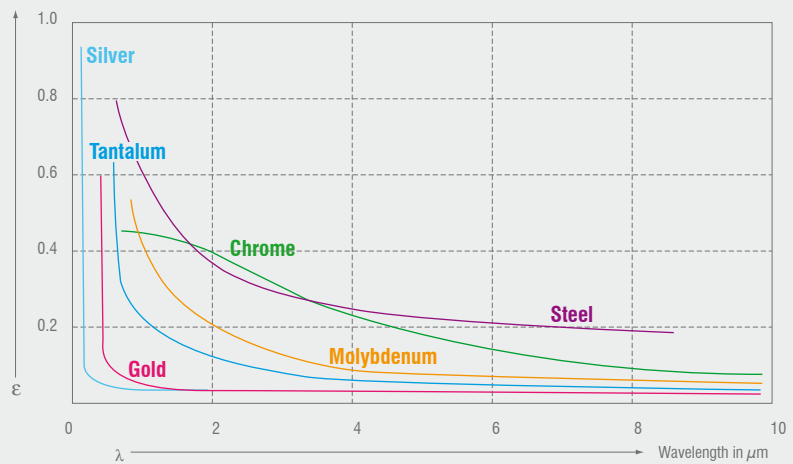


Spectral emissivity of metals

Temperature measurement of metallic materials

This may result in varying measuring results. Consequently, already the choice of the infrared thermometer depends on the wavelength and temperature range, in which metallic materials show a relatively high emissivity. For metallic materials the shortest possible wavelength should be used, as the measuring error increases in correlation to the wavelength.


The optimal wavelength for metals ranges with 0.8 to 1.0 μm for high temperatures at the limit of the visible area. Additionally, wavelengths of 1.6 μm, 2.3 μm and 5.0 μm are possible.

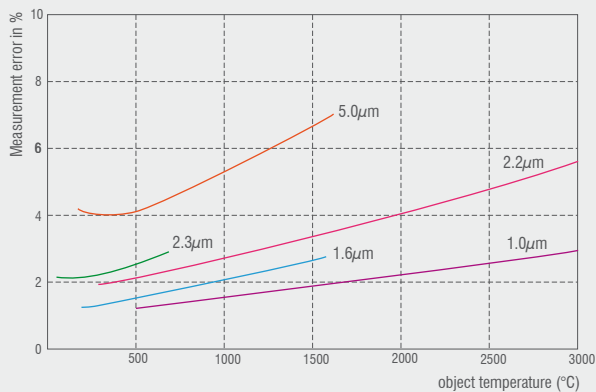

Measurement error of 10% as result of wrongly adjusted emissivity and in dependence on wavelength and object temperature.

Temperature measurement of plastics

Transmissivities of plastics vary with the wavelength. They react inversely proportional to the thickness, whereas thin materials are more transmissive than thick plastics. Optimal measurements can be carried out with wavelengths, where transmissivity is almost zero and independent from the thickness. Polyethylene, polypropylen, nylon and polystyrene are non-transmissive at $3.43\mu\text{m}$, polyester, polyurethane, teflon, FEP and polyamide are non-transmissive at $7.9\mu\text{m}$. For thicker and pigmented films wavelengths between 8 and $14\mu\text{m}$ will do. The manufacturer of infrared thermometers can determine the optimal spectral range for the temperature measurement by testing the plastics material. The reflection is between 5 and 10% for almost all plastics.

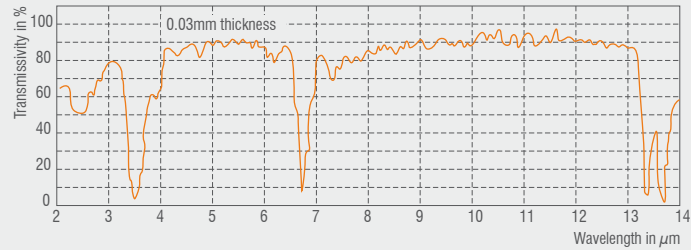


Spectral permeability of plastics made from polyethylene.



Spectral transmissivity of plastic layers made of polyester

Temperature measurement of glass

If you measure temperatures of glass it implies that you take care of reflection and transmissivity. A careful selection of the wavelength facilitates measurements of the glass surface as well as of the deeper layers of the glass. Wavelengths of $1.0\mu\text{m}$, $1.6\mu\text{m}$ or $2.3\mu\text{m}$ are appropriate for measuring deeper layers whereas $5\mu\text{m}$ are recommended for surface measurements. If temperatures are low, you should use wavelengths between 8 and $14\mu\text{m}$ in combination with an emissivity of 0.85 in order to compensate reflection. For this purpose a thermometer with short response time should be used as glass is a bad heat conductor and can change its surface temperature quickly.

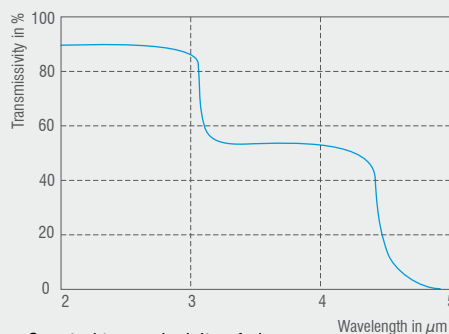

Spectral transmissivity of glass

Influence from the surroundings

The illustration shows that the transmissivity of air strongly depends on the wavelength. Strong flattening alternates with areas of high transmissivity - the so-called "atmospheric windows". The transmissivity in the longwave atmospheric window (8 - 14 μm) is constantly high whereas there are measurable alleviations by the atmosphere in the shortwave area, which may lead to false results. Typical measuring windows are 1.1 ... 1.7 μm , 2 ... 2.5 μm and 3 ... 5 μm .


Additional influences can arise from heat sources in the environment of the measuring object. To prevent wrong measuring results due to increased ambient temperatures, the infrared thermometer compensates the influence of ambient temperatures beforehand (as e.g. when measuring

temperatures of metals in industrial ovens, where the oven walls are hotter than the measuring object). A second temperature sensing head helps to generate accurate measuring results by automatically compensating the ambient temperatures and a correctly adjusted emissivity.

Dust, smoke and suspended matter in the atmosphere can pollute the optics and result in false measuring data. Here air purge collars (which are installed in front of the optics with compressed air) help to prevent deposition of suspended matter in front of the optics. Accessories for air and water cooling support the use of infrared thermometers even in hazardous surroundings.




Spectral transmissivity of air (1m, 32°C, 75% r. f.)

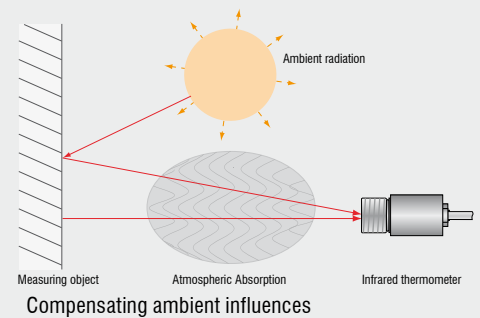

Optics and windows

An optical system - mostly consisting of lens optics - forms the beginning of the measuring chain. The lens receives the emitted infrared energy from a measuring object and focuses it onto a detector. Measurements based on this technology can only be correct, if the measuring object is bigger in size than the detector spot. The distance ratio describes the size of the measuring spot at a certain distance. It is defined as D:S-ratio: relation of measuring distance to spot diameter. The optical resolution improves with increasing values of the D:S ratio.

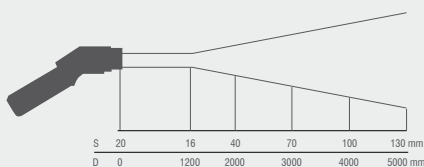


Optical Diagram of an infrared sensor

Because of their material infrared optics can be used for a certain range of wavelengths, only. The following illustration shows typical lenses and window materials with their corresponding wavelength for infrared thermometers.

Some measurements make it necessary to take the temperature through an appropriate measuring window, as in closed reaction containers, ovens or vacuum chambers. The transmissivity of the measuring window should match the spectral sensitivity of the sensor. Quartz crystal fits for high measuring temperatures. Special material like Germanium, AMTIR or Zinkselenid should be used for low temperatures in the spectral range between 8 - 14 μm . Also diameter of the window, temperature conditions and maximum compression balance are important features for the selection of a qualified

window material. A window of 25mm in diameter, which has to resist a compression balance of 1 atmosphere, should be 1.7mm thick. Window material, which is transparent also in the visible range, might help in order to appropriately adjust the sensor onto the measuring object (e.g. inside the vacuum container).

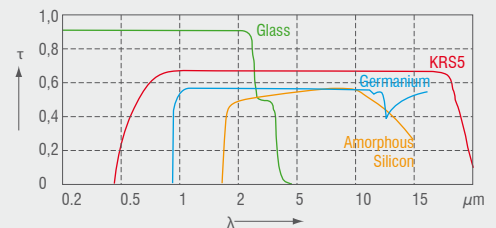

Transmissivity of typical infrared materials

The table shows various window materials in a survey.

| Window material/features | Al ₂ O ₃ | SiO ₂ | CaF ₂ | BaF ₂ | AMTIR | ZnS |
|--|--------------------------------|------------------|------------------|------------------|--------|--------|
| Recommended infrared wavelength in μm | 1...4 | 1...2.5 | 2...8 | 2...8 | 3...14 | 2...14 |
| Max. window temperature in $^{\circ}\text{C}$ | 1800 | 900 | 600 | 500 | 300 | 250 |
| Transmissivity in visible area | yes | yes | yes | yes | no | yes |
| Resistiveness against humidity, acids, ammoniac combinations | very good | very good | few | few | good | good |

Windows with anti reflection coating have a significantly higher transmissivity (up to 95%). The transmissivity loss can be corrected with the transmissivity setup, in case the manufacturer specified the corresponding wavelength area. If not, it has to be identified with an infrared thermometer and a reference source.

Emissivity Tables

| Material | Specification | Temperature in °C | Emissivity | | | Literature |
|----------------------|---|-------------------|------------|-------------|------|------------|
| | | | Spec. | Emissivity | Lit. | |
| Aluminumbrass | | 20 | T | 0.6 | 1 | |
| Aluminum | Plate, 4 samples differently scratched | 70 | LW | 0.03 - 0.06 | 9 | |
| Aluminum | Plate, 4 samples differently scratched | 70 | SW | 0.05 - 0.08 | 9 | |
| Aluminum | anodized, light grey, dull | 70 | LW | 0.97 | 9 | |
| Aluminum | anodized, light grey, dull | 70 | SW | 0.61 | 9 | |
| Aluminum | anodized, light grey, dull | 70 | LW | 0.95 | 9 | |
| Aluminum | anodized, light grey, dull | 70 | SW | 0.67 | 9 | |
| Aluminum | anodized plate | 100 | T | 0.55 | 2 | |
| Aluminum | film | 27 | 3μm | 0.09 | 3 | |
| Aluminum | film | 27 | 10μm | 0.04 | 3 | |
| Aluminum | harshened | 27 | 3μm | 0.28 | 3 | |
| Aluminum | harshened | 27 | 10μm | 0.18 | 3 | |
| Aluminum | Cast, sandblasted | 70 | LW | 0.46 | 9 | |
| Aluminum | Cast, sandblasted | 70 | SW | 0.47 | 9 | |
| Aluminum | dipped in HNO ₃ , plate | 100 | T | 0.05 | 4 | |
| Aluminum | polished | 50 - 100 | T | 0.04 - 0.06 | 1 | |
| Aluminum | polished, plate | 100 | T | 0.05 | 2 | |
| Aluminum | polished plate | 100 | T | 0.05 | 4 | |
| Aluminum | harshened surface | 20 - 50 | T | 0.06 - 0.07 | 1 | |
| Aluminum | deeply oxidized | 50 - 500 | T | 0.2 - 0.3 | 1 | |
| Aluminum | deeply weather beaten | 17 | SW | 0.83 - 0.94 | 5 | |
| Aluminum | unchanged, plate | 100 | T | 0.09 | 2 | |
| Aluminum | unchanged, plate | 100 | T | 0.09 | 4 | |
| Aluminum | vacuumcoated | 20 | T | 0.04 | 2 | |
| Aluminumoxide | activated, powder | | T | 0.46 | 1 | |
| Aluminumhydroxide | powder | | T | 0.28 | 1 | |
| Aluminumoxide | clean, powder (aluminumoxide) | | T | 0.16 | 1 | |
| Asbestos | Floor tiles | 35 | SW | 0.94 | 7 | |
| Asbestos | Boards | 20 | T | 0.96 | 1 | |
| Asbestos | Tissue | | T | 0.78 | 1 | |
| Asbestos | Paper | 40 - 400 | T | 0.93 - 0.95 | 1 | |
| Asbestos | Powder | | T | 0.40 - 0.60 | 1 | |
| Asbestos | brick | 20 | T | 0.96 | 1 | |
| Asphalt road surface | | 4 | LLW | 0.967 | 8 | |
| Brass | treated with 80-sandpaper | 20 | T | 0.2 | 2 | |
| Brass | plate, milled | 20 | T | 0.06 | 1 | |
| Brass | plate, treated with sandpaper | 20 | T | 0.2 | 1 | |
| Brass | strongly polished | 100 | T | 0.03 | 2 | |
| Brass | oxidized | 70 | SW | 0.04 - 0.09 | 9 | |
| Brass | oxidized | 70 | LW | 0.03 - 0.07 | 9 | |
| Brass | oxidized | 100 | T | 0.61 | 2 | |
| Brass | oxidized at 600°C | 200 - 600 | T | 0.59 - 0.61 | 1 | |
| Brass | polished | 200 | T | 0.03 | 1 | |
| Brass | blunt, patchy | 20 - 350 | T | 0.22 | 1 | |
| Brick | Aluminumoxide | 17 | SW | 0.68 | 5 | |
| Brick | Dinas-Siliziumoxide, fireproof | 1000 | T | 0.66 | 1 | |
| Brick | Dinas-Siliziumoxid, glazed, harshened | 1100 | T | 0.85 | 1 | |
| Brick | Dinas-Siliziumoxid, unglazed, harshened | 1000 | T | 0.8 | 1 | |
| Brick | fireproof product, corundom | 1000 | T | 0.46 | 1 | |
| Brick | fireproof product, magnesit | 1000 - 1300 | T | 0.38 | 1 | |
| Brick | fireproof product, mildly beaming | 500 - 1000 | T | 0.65 - 0.75 | 1 | |
| Brick | fireproof product, strongly beaming | 500 - 1000 | T | 0.8 - 0.9 | 1 | |
| Brick | fire brick | 17 | SW | 0.68 | 5 | |
| Brick | glazed | 17 | SW | 0.94 | 5 | |
| Brick | brickwork | 35 | SW | 0.94 | 7 | |

| Material | Specification | °C | Spec. | Emissivity | Lit. |
|----------------|---|-------------|-------|-------------|------|
| Brick | brickwork, plastered | 20 | T | 0.94 | 1 |
| Brick | normal | 17 | SW | 0.86 - 0.81 | 5 |
| Brick | red, normal | 20 | T | 0.93 | 2 |
| Brick | red, grey | 20 | T | 0.88 - 0.93 | 1 |
| Brick | chamotte | 20 | T | 0.85 | 1 |
| Brick | chamotte | 1000 | T | 0.75 | 1 |
| Brick | chamotte | 1200 | T | 0.59 | 1 |
| Brick | amorphous silicon 95% SiO ₂ | 1230 | T | 0.66 | 1 |
| Brick | Sillimanit, 33% SiO ₂ , 64% Al ₂ O ₃ | 1500 | T | 0.29 | 1 |
| Bronze | Phosphorbronze | 70 | LW | 0.06 | 9 |
| Bronze | Phosphorbronze | 70 | SW | 0.08 | 1 |
| Bronze | polished | 50 | T | 0.1 | 1 |
| Bronze | Porous, harshened | 50 - 100 | T | 0.55 | 1 |
| Bronze | powder | | T | 0.76 - 0.80 | 1 |
| Carbon | fluent | 20 | T | 0.98 | 2 |
| Carbon | plumbago powder | | T | 0.97 | 1 |
| Carbon | charcoal powder | | T | 0.96 | 1 |
| Carbon | candle soot | 20 | T | 0.95 | 2 |
| Carbon | lamp soot | 20 - 400 | T | 0.95 - 0.97 | 1 |
| Cast Iron | treated | 800 - 1000 | T | 0.60 - 0.70 | 1 |
| Cast Iron | fluent | 1300 | T | 0.28 | 1 |
| Cast Iron | cast | 50 | T | 0.81 | 1 |
| Cast Iron | blocks made of cast iron | 1000 | T | 0.95 | 1 |
| Cast Iron | oxidized | 38 | T | 0.63 | 4 |
| Cast Iron | oxidized | 100 | T | 0.64 | 2 |
| Cast Iron | oxidized | 260 | T | 0.66 | 4 |
| Cast Iron | oxidized | 538 | T | 0.76 | 4 |
| Cast Iron | oxidized at 600°C | 200 - 600 | T | 0.64 - 0.78 | 1 |
| Cast Iron | polished | 38 | T | 0.21 | 4 |
| Cast Iron | polished | 40 | T | 0.21 | 2 |
| Cast Iron | polished | 200 | T | 0.21 | 1 |
| Cast Iron | untreated | 900 - 1100 | T | 0.87 - 0.95 | 1 |
| Chipboard | untreated | 20 | SW | 0.9 | 6 |
| Chrome | polished | 50 | T | 0.1 | 1 |
| Chrome | polished | 500 - 1000 | T | 0.28 - 0.38 | 1 |
| Clay | burnt | 70 | T | 0.91 | 1 |
| Cloth | black | 20 | T | 0.98 | 1 |
| Concrete | | 20 | T | 0.92 | 2 |
| Concrete | pavement | 5 | LLW | 0.974 | 8 |
| Concrete | harshened | 17 | SW | 0.97 | 5 |
| Concrete | dry | 36 | SW | 0.95 | 7 |
| Copper | electrolytic, brightly polished | 80 | T | 0.018 | 1 |
| Copper | electrolytic, polished | -34 | T | 0.006 | 4 |
| Copper | scraped | 27 | T | 0.07 | 4 |
| Copper | molten | 1100 - 1300 | T | 0.13 - 0.15 | 1 |
| Copper | commercial, shiny | 20 | T | 0.07 | 1 |
| Copper | oxidized | 50 | T | 0.6 - 0.7 | 1 |
| Copper | oxidized, dark | 27 | T | 0.78 | 4 |
| Copper | oxidized, deeply | 20 | T | 0.78 | 2 |
| Copper | oxidized, black | | T | 0.88 | 1 |
| Copper | polished | 50 - 100 | T | 0.02 | 1 |
| Copper | polished | 100 | T | 0.03 | 2 |
| Copper | polished, commercial | 27 | T | 0.03 | 4 |
| Copper | polished, mechanical | 22 | T | 0.015 | 4 |
| Copper | clean, thoroughly prepared surface | 22 | T | 0.008 | 4 |
| Copper-dioxide | powder | | T | 0.84 | 1 |
| Copper-dioxide | red, powder | | T | 0.7 | 1 |
| Earth | saturated with water | 20 | T | 0.95 | 2 |
| Earth | dry | 20 | T | 0.92 | 2 |
| Enamel | | 20 | T | 0.9 | 1 |
| Enamel | paint | 20 | T | 0.85 - 0.95 | 1 |
| Fibreboard | hard, untreated | 20 | SW | 0.85 | 6 |
| Fibreboard | Ottrelith | 70 | LW | 0.88 | 9 |

| Material | Specification | °C | Spec. | Emissivity | Lit. |
|-----------------|--------------------------------------|------------|-------|-------------|------|
| Fibreboard | Ottrelith | 70 | SW | 0.75 | 9 |
| Fibreboard | particle plate | 70 | LW | 0.89 | 9 |
| Fibreboard | particle plate | 70 | SW | 0.77 | 9 |
| Fibreboard | porous, untreated | 20 | SW | 0.85 | 6 |
| Glazing Rebates | 8 different colours and qualities | 70 | LW | 0.92 - 0.94 | 9 |
| Glazing Rebates | 8 different colours and qualities | 70 | SW | 0.88 - 0.96 | 9 |
| Glazing Rebates | aluminum, different age | 50 - 100 | T | 0.27 - 0.67 | 1 |
| Glazing Rebates | on oily basis, average of 16 colours | 100 | T | 0.94 | 2 |
| Glazing Rebates | chrome green | | T | 0.65 - 0.70 | 1 |
| Glazing Rebates | cadmium yellow | | T | 0.28 - 0.33 | 1 |
| Glazing Rebates | cobalt blue | | T | 0.7 - 0.8 | 1 |
| Glazing Rebates | plastics, black | 20 | SW | 0.95 | 6 |
| Glazing Rebates | plastics, white | 20 | SW | 0.84 | 6 |
| Glazing Rebates | oil | 17 | SW | 0.87 | 5 |
| Glazing Rebates | oil, different colours | 100 | T | 0.92 - 0.96 | 1 |
| Glazing Rebates | oil, shiny grey | 20 | SW | 0.96 | 6 |
| Glazing Rebates | oil, grey, matt | 20 | SW | 0.97 | 6 |
| Glazing Rebates | oil, black, matt | 20 | SW | 0.94 | 6 |
| Glazing Rebates | oil, black, shiny | 20 | SW | 0.92 | 6 |
| Gold | brightly polished | 200 - 600 | T | 0.02 - 0.03 | 1 |
| Gold | strongly polished | 100 | T | 0.02 | 2 |
| Gold | polished | 130 | T | 0.018 | 1 |
| Granite | polished | 20 | LLW | 0.849 | 8 |
| Granite | harshened | 21 | LLW | 0.879 | 8 |
| Granite | harshened, 4 different samples | 70 | LW | 0.77 - 0.87 | 9 |
| Granite | harshened, 4 different samples | 70 | SW | 0.95 - 0.97 | 9 |
| Gypsum | | 20 | T | 0.8 - 0.9 | 1 |
| Gypsum, applied | | 17 | SW | 0.86 | 5 |
| Gypsum, applied | gypsum plate, untreated | 20 | SW | 0.9 | 6 |
| Gypsum, applied | harshened surface | 20 | T | 0.91 | 2 |
| Ice: see Water | | | | | |
| Iron and Steel | electrolytic | 22 | T | 0.05 | 4 |
| Iron and Steel | electrolytic | 100 | T | 0.05 | 4 |
| Iron and Steel | electrolytic | 260 | T | 0.07 | 4 |
| Iron and Steel | electrolytic, brightly polished | 175 - 225 | T | 0.05 - 0.06 | 1 |
| Iron and Steel | freshly milled | 20 | T | 0.24 | 1 |
| Iron and Steel | freshly processed with sandpaper | 20 | T | 0.24 | 1 |
| Iron and Steel | smoothed plate | 950 - 1100 | T | 0.55 - 0.61 | 1 |
| Iron and Steel | forged, brightly polished | 40 - 250 | T | 0.28 | 1 |
| Iron and Steel | milled plate | 50 | T | 0.56 | 1 |
| Iron and Steel | shiny, etched | 150 | T | 0.16 | 1 |
| Iron and Steel | shiny oxide layer, plate | 20 | T | 0.82 | 1 |
| Iron and Steel | hotly milled | 20 | T | 0.77 | 1 |
| Iron and Steel | hotly milled | 130 | T | 0.6 | 1 |
| Iron and Steel | coldly milled | 70 | LW | 0.09 | 9 |
| Iron and Steel | coldly milled | 70 | SW | 0.2 | 9 |
| Iron and Steel | covered with red rust | 20 | T | 0.61 - 0.85 | 1 |
| Iron and Steel | oxidized | 100 | T | 0.74 | 1 |
| Iron and Steel | oxidized | 100 | T | 0.74 | 4 |
| Iron and Steel | oxidized | 125 - 525 | T | 0.78 - 0.82 | 1 |
| Iron and Steel | oxidized | 200 | T | 0.79 | 2 |
| Iron and Steel | oxidized | 200 - 600 | T | 0.8 | 1 |
| Iron and Steel | oxidized | 1227 | T | 0.89 | 4 |
| Iron and Steel | polished | 100 | T | 0.07 | 2 |
| Iron and Steel | polished | 400 - 1000 | T | 0.14 - 0.38 | 1 |
| Iron and Steel | polished plate | 750 - 1050 | T | 0.52 - 0.56 | 1 |
| Iron and Steel | harshened, even surface | 50 | T | 0.95 - 0.98 | 1 |
| Iron and Steel | rusty, red | 20 | T | 0.69 | 1 |
| Iron and Steel | rusty red, plate | 22 | T | 0.69 | 4 |
| Iron and Steel | deeply oxidized | 50 | T | 0.88 | 1 |
| Iron and Steel | deeply oxidized | 500 | T | 0.98 | 1 |
| Iron and Steel | deeply rusted | 17 | SW | 0.96 | 5 |
| Iron and Steel | deeply rusted plate | 20 | T | 0.69 | 2 |

| Material | Specification | °C | Spec. | Emissivity | Lit. |
|----------------------|----------------------------------|-------------|-------|-------------|------|
| Iron galvanized | plate | 92 | T | 0.07 | 4 |
| Iron galvanized | plate, oxidized | 20 | T | 0.28 | 1 |
| Iron galvanized | plate, oxidized | 30 | T | 0.23 | 1 |
| Iron galvanized | deeply oxidized | 70 | LW | 0.85 | 9 |
| Iron galvanized | deeply oxidized | 70 | SW | 0.64 | 9 |
| Iron tinned | plate | 24 | T | 0.064 | 4 |
| Leather | tanned fur | | T | 0.75 - 0.80 | 1 |
| Limestone | | | T | 0.3 - 0.4 | 1 |
| Magnesium | | 22 | T | 0.07 | 4 |
| Magnesium | | 260 | T | 0.13 | 4 |
| Magnesium | | 538 | T | 0.18 | 4 |
| Magnesium | polished | 20 | T | 0.07 | 2 |
| Magnesiumpowder | | | T | 0.86 | 1 |
| Molybdenum | | 600 - 1000 | T | 0.08 - 0.13 | 1 |
| Molybdenum | | 1500 - 2200 | T | 0.19 - 0.26 | 1 |
| Molybdenum | twine | 700 - 2500 | T | 0.1 - 0.3 | 1 |
| Mortar | | 17 | SW | 0.87 | 5 |
| Mortar | dry | 36 | SW | 0.94 | 7 |
| Nickel | wire | 200 - 1000 | T | 0.1 - 0.2 | 1 |
| Nickel | electrolytic | 22 | T | 0.04 | 4 |
| Nickel | electrolytic | 38 | T | 0.06 | 4 |
| Nickel | electrolytic | 260 | T | 0.07 | 4 |
| Nickel | electrolytic | 538 | T | 0.1 | 4 |
| Nickel | galvanized, polished | 20 | T | 0.05 | 2 |
| Nickel | galvanized on iron, not polished | 20 | T | 0.11 - 0.40 | 1 |
| Nickel | galvanized on iron, non polished | 22 | T | 0.11 | 4 |
| Nickel | galvanized on iron, non polished | 22 | T | 0.045 | 4 |
| Nickel | lightly matt | 122 | T | 0.041 | 4 |
| Nickel | oxidized | 200 | T | 0.37 | 2 |
| Nickel | oxidized | 227 | T | 0.37 | 4 |
| Nickel | oxidized | 1227 | T | 0.85 | 4 |
| Nickel | oxidized at 600°C | 200 - 600 | T | 0.37 - 0.48 | 1 |
| Nickel | polished | 122 | T | 0.045 | 4 |
| Nickel | clean, polished | 100 | T | 0.045 | 1 |
| Nickel | clean, polished | 200 - 400 | T | 0.07 - 0.09 | 1 |
| Nickel-chrome | wire, bare | 50 | T | 0.65 | 1 |
| Nickel-chrome | wire, bare | 500 - 1000 | T | 0.71 - 0.79 | 1 |
| Nickel-chrome | wire, oxidized | 50 - 500 | T | 0.95 - 0.98 | 1 |
| Nickel-chrome | milled | 700 | T | 0.25 | 1 |
| Nickel-chrome | sandblasted | 700 | T | 0.7 | 1 |
| Nickeloxide | | 500 - 650 | T | 0.52 - 0.59 | 1 |
| Nickeloxide | | 1000 - 1250 | T | 0.75 - 0.86 | 1 |
| Oil, Lubricating Oil | 0.025-mm-layer | 20 | T | 0.27 | 2 |
| Oil, Lubricating Oil | 0.05-mm-layer | 20 | T | 0.46 | 2 |
| Oil, Lubricating Oil | 0.125-mm-layer | 20 | T | 0.72 | 2 |
| Oil, Lubricating Oil | thick layer | 20 | T | 0.82 | 2 |
| Oil, Lubricating Oil | layer on Ni-basis: only Ni-Basis | 20 | T | 0.05 | 2 |
| Paint | 3 colours, sprayed on aluminum | 70 | LW | 0.92 - 0.94 | 9 |
| Paint | 3 colours, sprayed on aluminum | 70 | SW | 0.50 - 0.53 | 9 |
| Paint | aluminum on harshened surface | 20 | T | 0.4 | 1 |
| Paint | bakelite | 80 | T | 0.83 | 1 |
| Paint | heat-proof | 100 | T | 0.92 | 1 |
| Paint | black, shiny, sprayed on iron | 20 | T | 0.87 | 1 |
| Paint | black, matt | 100 | T | 0.97 | 2 |
| Paint | black, blunt | 40 - 100 | T | 0.96 - 0.98 | 1 |
| Paint | white | 40 - 100 | T | 0.8 - 0.95 | 1 |
| Paint | white | 100 | T | 0.92 | 2 |
| Paper | 4 different colours | 70 | LW | 0.92 - 0.94 | 9 |
| Paper | 4 different colours | 70 | SW | 0.68 - 0.74 | 9 |
| Paper | coated with black paint | | T | 0.93 | 1 |
| Paper | dark blue | | T | 0.84 | 1 |
| Paper | yellow | | T | 0.72 | 1 |
| Paper | green | | T | 0.85 | 1 |

Addendum: Emissivity Tables

| Material | Specification | °C | Spec. | Emissivity | Lit. |
|-------------------|---|-------------|-------|-------------|------|
| Paper | red | | T | 0.76 | 1 |
| Paper | black | | T | 0.9 | 1 |
| Paper | black, blunt | | T | 0.94 | 1 |
| Paper | black, blunt | 70 | LW | 0.89 | 9 |
| Paper | black, blunt | 70 | SW | 0.86 | 9 |
| Paper | white | 20 | T | 0.7 - 0.9 | 1 |
| Paper | white, 3 different shiny coatings | 70 | LW | 0.88 - 0.90 | 9 |
| Paper | white, 3 different shiny coatings | 70 | SW | 0.76 - 0.78 | 9 |
| Paper | white, bonded | 20 | T | 0.93 | 2 |
| Plastics | fibre optics laminate (printed circuit board) | 70 | LW | 0.91 | 9 |
| Plastics | fibre optics laminate (printed circuit board) | 70 | SW | 0.94 | 9 |
| Plastics | polyurethane-insulating plate | 70 | LW | 0.55 | 9 |
| Plastics | polyurethane-insulating plate | 70 | SW | 0.29 | 9 |
| Plastics | PVC, plastic floor, blunt, structured | 70 | LW | 0.93 | 9 |
| Plastics | PVC, plastic floor, blunt, structured | 70 | SW | 0.94 | 9 |
| Plate | shiny | 20 - 50 | T | 0.04 - 0.06 | 1 |
| Plate | white plate | 100 | T | 0.07 | 2 |
| Platinum | | 17 | T | 0.016 | 4 |
| Platinum | | 22 | T | 0.05 | 4 |
| Platinum | | 260 | T | 0.06 | 4 |
| Platinum | | 538 | T | 0.1 | 4 |
| Platinum | | 1000 - 1500 | T | 0.14 - 0.18 | 1 |
| Platinum | | 1094 | T | 0.18 | 4 |
| Platinum | band | 900 - 1100 | T | 0.12 - 0.17 | 1 |
| Platinum | wire | 50 - 200 | T | 0.06 - 0.07 | 1 |
| Platinum | wire | 500 - 1000 | T | 0.10 - 0.16 | 1 |
| Platinum | wire | 1400 | T | 0.18 | 1 |
| Platinum | clean, polished | 200 - 600 | T | 0.05 - 0.10 | 1 |
| Plumb | shiny | 250 | T | 0.08 | 1 |
| Plumb | non oxidized, polished | 100 | T | 0.05 | 4 |
| Plumb | oxidized, grey | 20 | T | 0.28 | 1 |
| Plumb | oxidized, grey | 22 | T | 0.28 | 4 |
| Plumb | oxidized at 200°C | 200 | T | 0.63 | 1 |
| Plumb rot | | 100 | T | 0.93 | 4 |
| Plumb rot, Powder | | 100 | T | 0.93 | 1 |
| Polystyrene | heat insulation | 37 | SW | 0.6 | 7 |
| Porcelain | glazed | 20 | T | 0.92 | 1 |
| Porcelain | white, glowing | | T | 0.70 - 0.75 | 1 |
| Rubber | hard | 20 | T | 0.95 | 1 |
| Rubber | soft, grey, harshened | 20 | T | 0.95 | 1 |
| Sand | | | T | 0.6 | 1 |
| Sand | | 20 | T | 0.9 | 2 |
| Sandpaper | coarse | 80 | T | 0.85 | 1 |
| Sandstone | polished | 19 | LLW | 0.909 | 8 |
| Sandstone | harshened | 19 | LLW | 0.935 | 8 |
| Silver | polished | 100 | T | 0.03 | 2 |
| Silver | clean, polished | 200 - 600 | T | 0.02 - 0.03 | 1 |
| Skin | Human Being | 32 | T | 0.98 | 2 |
| Slag | basin | 0 - 100 | T | 0.97 - 0.93 | 1 |
| Slag | basin | 200 - 500 | T | 0.89 - 0.78 | 1 |
| Slag | basin | 600 - 1200 | T | 0.76 - 0.70 | 1 |
| Slag | basin | 1400 - 1800 | T | 0.69 - 0.67 | 1 |
| Snow: see Water | | | | | |
| Stainless Steel | plate, polished | 70 | LW | 0.14 | 9 |
| Stainless Steel | plate, polished | | SW | 0.18 | 9 |
| Stainless Steel | plate, not treated, scratched | 70 | LW | 0.28 | 9 |
| Stainless Steel | plate, not treated, scratched | 70 | SW | 0.3 | 9 |
| Stainless Steel | milled | 700 | T | 0.45 | 1 |
| Stainless Steel | alloy, 8% Ni, 18% Cr | 500 | T | 0.35 | 1 |
| Stainless Steel | sandblasted | 700 | T | 0.7 | 1 |
| Stainless Steel | type 18-8, shiny | 20 | T | 0.16 | 2 |
| Stainless Steel | type 18-8, oxidized at 800°C | 60 | T | 0.85 | 2 |


| Material | Specification | °C | Spec. | Emissivity | Lit. |
|------------|----------------------------------|-------------|-------|-------------|------|
| Tar | | | T | 0.79 - 0.84 | 1 |
| Tar | paper | 20 | T | 0.91 - 0.93 | 1 |
| Titanium | oxidized at 540°C | 200 | T | 0.4 | 1 |
| Titanium | oxidized at 540°C | 500 | T | 0.5 | 1 |
| Titanium | oxidized at 540°C | 1000 | T | 0.6 | 1 |
| Titanium | polished | 200 | T | 0.15 | 1 |
| Titanium | polished | 500 | T | 0.2 | 1 |
| Titanium | polished | 1000 | T | 0.36 | 1 |
| Tungsten | | 200 | T | 0.05 | 1 |
| Tungsten | | 600 - 1000 | T | 0.1 - 0.16 | 1 |
| Tungsten | | 1500 - 2200 | T | 0.24 - 0.31 | 1 |
| Tungsten | twine | 3300 | T | 0.39 | 1 |
| Varnish | on parquet flooring made of oak | 70 | LW | 0.90 - 0.93 | 9 |
| Varnish | on parquet flooring made of oak | 70 | SW | 0.9 | 9 |
| Varnish | matt | 20 | SW | 0.93 | 6 |
| Vulcanite | | | T | 0.89 | 1 |
| Wall Paper | slightly patterned, light grey | 20 | SW | 0.85 | 6 |
| Wall Paper | slightly patterned, red | 20 | SW | 0.9 | 6 |
| Water | distilled | 20 | T | 0.96 | 2 |
| Water | ice, strongly covered with frost | 0 | T | 0.98 | 1 |
| Water | ice, slippery | -10 | T | 0.96 | 2 |
| Water | ice, slippery | 0 | T | 0.97 | 1 |
| Water | frost crystals | -10 | T | 0.98 | 2 |
| Water | coated >0.1 mm thick | 0 - 100 | T | 0.95 - 0.98 | 1 |
| Water | snow | | T | 0.8 | 1 |
| Water | snow | -10 | T | 0.85 | 2 |
| Wood | | 17 | SW | 0.98 | 5 |
| Wood | | 19 | LLW | 0.962 | 8 |
| Wood | planed | 20 | T | 0.8 - 0.9 | 1 |
| Wood | planed oak | 20 | T | 0.9 | 2 |
| Wood | planed oak | 70 | LW | 0.88 | 9 |
| Wood | planed oak | 70 | SW | 0.77 | 9 |
| Wood | treated with sandpaper | | T | 0.5 - 0.7 | 1 |
| Wood | pine, 4 different samples | 70 | LW | 0.81 - 0.89 | 9 |
| Wood | pine, 4 different samples | 70 | SW | 0.67 - 0.75 | 9 |
| Wood | plywood, even, dry | 36 | SW | 0.82 | 7 |
| Wood | plywood, untreated | 20 | SW | 0.83 | 6 |
| Wood | white, damp | 20 | T | 0.7 - 0.8 | 1 |
| Zinc | plate | 50 | T | 0.2 | 1 |
| Zinc | oxidized at 400°C | 400 | T | 0.11 | 1 |
| Zinc | oxidized surface | 1000 - 1200 | T | 0.50 - 0.60 | 1 |
| Zinc | polished | 200 - 300 | T | 0.04 - 0.05 | 1 |

References


- 1 Mikaél A. Bramson: Infrared Radiation, A Handbook for Applications, Plenum Press, N.Y.
- 2 William L. Wolfe, George J. Zissis: The Infrared Handbook, Office of Naval Research, Department of Navy, Washington, D.C.
- 3 Madding, R.P.: Thermographic Instruments and Systems. Madison, Wisconsin: University of Wisconsin - Extension, Department of Engineering and Applied Science
- 4 William L. Wolfe: Handbook of Military Infrared Technology, Office of Naval Research, Department of Navy, Washington, D.C.
- 5 Jones, Smith, Probert: External thermography of buildings ..., Proc. Of the Society of Phot-Optical Instrumentation Engineers, vol. 110, Industrial and Civil Applications of Infrared Technology, Juni 1977 London
- 6 Paljak, Pettersson: Thermography of Buildings, Swedish Building Research Institute, Stockholm 1972
- 7 Vleck, J.: Determination of emissivity with imaging radiometers and some emissivities at $\lambda = 5 \mu\text{m}$. Photogrammetric Engineering and Remote Sensing.
- 8 Kern: Evaluation of infrared emission of clouds and ground as measured by weather satellites, Defence Documentation Center, AD 617 417.
- 9 Öhman, Claes: Emmittansmätningar med AGEMA E-Box. Teknisk rapport, AGEMA 1999. (Emissivity measurements with AGEMA E-Box. Technical report, AGEMA 1999.)

| | | | |
|-----------------------|--|-----------------------------|--|
| Absorption | Ratio of absorbed radiation by an object to incoming radiation. A number between 0 and 1. | Reflection | Ratio of radiation reflected by the object and incoming radiation. A number between 0 and 1. |
| Emissivity | Emitted radiation of an object compared to the radiation from a black body source. A number between 0 and 1. | Black body source | Object with a reflection of 0. Any radiation is to be traced back to its temperature. |
| Filter | Material, permeable for certain infrared wavelengths only | Spectral specific radiation | Energy emitted by an object related to time, area and wavelength ($W/m^2/\mu m$). |
| FOV | Field of view: Horizontal field of view of an infrared lens. | Specific radiation | Energy emitted from an object related to units of time and area (W/m^2). |
| FPA | Focal Plane Array: type of an infrared detector. | Radiation | Energy emitted by an object related to time, area and solid angle ($W/m^2/sr$). |
| Grey Body Source | An object, which emits a certain part of the energy which a black body source emits at every wavelength. | Radiation flow | Energy emitted by an object related to the unit of time (W) |
| IFOV | Instantaneous field of view: A value for the geometric resolution of a thermal imager. | Temperature difference | A value, which is determined by subtraction of two temperature values. |
| NETD | Noise equivalent temperature difference. A value for the noise (in the image) of a thermal imager. | Temperature range | Current temperature measuring range of a thermal imager. Imagers can have several temperature ranges. They are described with the help of two black body source values, which serve as threshold values for the current calibration. |
| Object parameter | Values, with which measurement conditions and measuring object are described (e.g. emissivity, ambient temperature, distance a.s.o.) | Thermogram | Infrared image |
| Object signal | A noncalibrated value, which refers to the radiation the thermal imager receives from the measuring object. | Transmissivity | Gases and solid states have different transmissivities. Transmissivity describes the level of infrared radiation, which permeates the object. A number between 0 and 1. |
| Palette | Colours of the infrared image | Ambient surroundings | Objects and gases, which pass radiation to the measuring object. |
| Pixel | Synonym for picture element. A single picture point in an image. | | |
| Reference temperature | Temperature value to compare regular measuring data with. | | |


Typical applications




Temperature measurement in drying machines




Measurement on calendars




Sealing processes

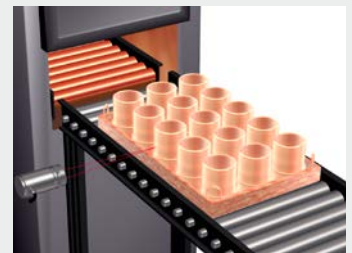

Temperature monitoring of oven




Soldering processes



Glass cooling




Temperature monitoring of baked goods

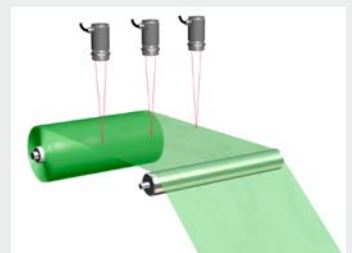

Temperature monitoring of film materials




Measurement of plastic forming processes



Temperature measurement of lamps



Temperature measurement in extrusion lines

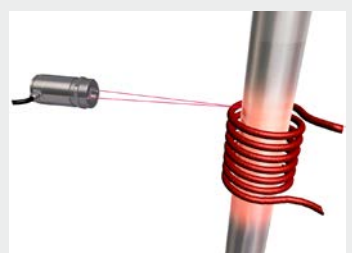

Temperature measurement in heating processes

High performance sensors made by Micro-Epsilon




Sensors and systems for displacement and position



Sensors and measurement devices for non-contact temperature measurement



2D/3D profile sensors (laser scanner)

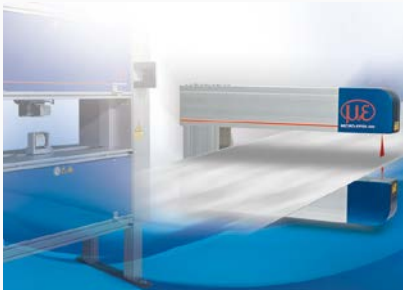

Measurement and inspection systems for quality assurance



Optical micrometers, fibre optic sensors and optical fibres



Colour recognition sensors, LED analysers and colour online spectrometer



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm



MICRO-EPSILON Headquarters
Koenigbacher Str. 15 · 94496 Ortenburg / Germany
Tel. +49 (0) 8542 / 168-0 · Fax +49 (0) 8542 / 168-90
info@micro-epsilon.com · www.micro-epsilon.com

MICRO-EPSILON UK Ltd.
No.1 Shorelines Building · Shore Road · Birkenhead · CH41 1AU
Phone +44 (0) 151 355 6070 · Fax +44 (0) 151 355 6075
info@micro-epsilon.co.uk · www.micro-epsilon.co.uk