

Wireless IIOT inclinometer sensor | tilt, inclination, slope monitoring | low-cost version

FEATURED VIDEO



USER GUIDE



QUICK START



MECHANICAL DRAWING



STEP FILE



SmartSensor



MADE IN GERMANY



207-132085



MAIN FEATURES

- Wireless inclinometer (measurement range $\pm 15^\circ, \pm 30^\circ$)
- Time-synchronized wireless sensor networks (± 2.5 ms of accuracy)
- Embedded data logger : up to 1 million data points (with events dating)
- Excellent radio link relying on the radio antenna diversity developed by Beanair®
- Waterproof IP67 casing (Nema 6)
- Integrated Lithium-Ion battery charger

APPLICATIONS




Structural Health Monitoring

Test and Measurement



Condition Monitoring

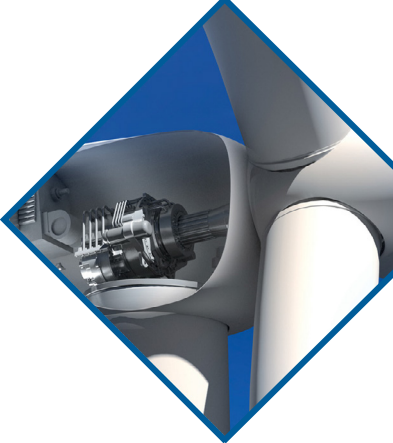

Land Surveying



For further information about bridge monitoring, please read the following applications note :
AN_RF_002 – “Bridge monitoring with BeanAir® products”

TIME-SYNCHRONIZED WIRELESS IIOT SENSORS

TimeSync function brings time-synchronization over the Wireless IIOT Sensors (± 2.5 ms of accuracy between each wireless IIOT sensors) and contributes to enhance user experience about correlation of remote sensing data and modal analysis.



REMOTE CONFIGURATION & MONITORING

BeanScape® 2.4GHz Basic

The **BeanScape® 2.4GHz** application allows the user to view all the data transmitted by the **BeanDevice® 2.4GHz INC**. Thanks to the OTAC (Over-the-Air configuration) feature, the user can remotely configure the **BeanDevice® 2.4GHz INC**.

SEVERAL DATA ACQUISITION MODES ARE AVAILABLE ON THE BEANDEVICE® INC :

- **Low Duty Cycle Data Acquisition mode (LDCDA)** : the data acquisition is immediately transmitted by radio. The transmission frequency can be configured from 1s to 24h.
- **Survey Mode**: the measured value is transmitted by radio whenever an alarm threshold (fixed by the user) is detected (4 alarms threshold levels High/Low). Meanwhile, the device sends frequently a beacon frame informing its current status.
- **Streaming Packet Mode** : all measured values are transmitted by packet within a continuous flow at 3 kbps maximum



BeanScape® 2.4GHz Premium+ Add-on

The **BeanScape® 2.4GHz Premium+** integrates an OPC DA server (Data Access). OPC DA is particularly well suited for real time measurement and data sharing. Each data/measurement can be associated to a tag or its attributes and shared with one or many OPC clients.

i For further information about the different data acquisition modes:
TN-RF-008 – “Data acquisition modes available on the BeanDevice®”

ANTENNA DIVERSITY

While the vast majority of wireless sensors show their limits in harsh industrial environment, the **BeanDevice® 2.4GHz INC** integrates an innovative antenna diversity design, boosting the radio link quality in environments subject to random and diverse disturbances. Antenna Diversity improves both the quality and reliability of a wireless link by 30%.



EMBEDDED DATA LOGGER UP TO 1 MILLION DATA POINTS

The **BeanDevice® 2.4GHz INC** integrates an embedded datalogger, which can be used to log data when a Wireless IIOT Sensors can not be easily deployed on your site.

All the data acquisition are stored on the embedded flash and then transmitted to the **BeanGateway® 2.4GHz** when a Wireless IIOT Sensors is established.

The data logger function is compatible with all the data acquisition mode available on the **BeanDevice® 2.4GHz INC**:

- LowDutyCycle Data Acquisition
- Survey
- Streaming packet

EXAMPLE : TILT MONITORING ON A BRIDGE

- In standalone operation, the **BeanDevice® 2.4GHz INC** stores all the measurements on its onboard datalogger. Thus, a direct connection with the **BeanGateway® 2.4GHz** is not needed.
- During the measurement campaign, all the acquired measurements are stored on datalogger.
- Data logs can be transmitted to the **BeanGateway® 2.4GHz** on request. Once a successful transmission is done, the user can choose to erase automatically the logs from the datalogger memory, so new ones can be stored.



For further information about data logger, please read the following technical note :
TN-RF-007 – “BeanDevice® DataLogger User Guide ”

TECHNICAL SPECIFICATIONS
PRODUCT REFERENCE
BND-2.4GHZ-INC-MR-PS
MR – Measurement Range

 30B : bi-axial $\pm 30^\circ$

 90B : bi-axial $\pm 90^\circ$
PS - Power Supply
RB : Internal rechargeable battery

XT : External Power supply

 Example n°1: BND-2.4GHZ-INC-30B-RB, wireless bi-axial inclinometer with $\pm 30^\circ$ measurement range, internal rechargeable battery

 Example n°2: BND-2.4GHZ-INC-90B-XT, wireless bi-axial inclinometer with $\pm 90^\circ$ measurement range, external primary cell

SENSOR SPECIFICATIONS

Inclinometer Technology	Accurate and low power MEMS technology
Measurement resolution (Bandwidth 10 Hz)	0.0025°
Noise density	0.0008 °/√Hz
Accuracy (full scale, @ 25°C)	$\pm 0,1^\circ$
Offset temperature dependency	$\pm 0.008 \%/^\circ\text{C}$
Sensitivity temperature dependency	$\pm 0.008 \%/^\circ\text{C}$
Long term stability (@23°C)	< 0.014 °
Analog to Digital converter	16-bits, SAR architecture (Successive Approximation Register) with temperature compensation
Sensor frequency Response (-3 dB)	DC to 28 Hz
Noise spectral density DC to 100 Hz	0.0008 °/√Hz
Anti-aliasing filter	Butterworth 5th order filter – cut-off frequency : 1 Hz to 100 Hz remotely programmable (BeanScope®)

OVER-THE-AIR CONFIGURATION (OTAC) PARAMETERS

Data Acquisition mode (SPS = sample per second)	Low Duty Cycle Data Acquisition (LDCDA) Mode: 1s to 24 hour - Streaming Mode (not available on XT version, External power supply)
Sampling Rate (in streaming packet mode)	Minimum: 1 SPS Maximum: 3 kSPS per axis (one axis enabled) 1,5 kSPS per axis (2-axis enabled) 1 kSPS per axis (3-axis enabled)
Alarm Threshold	High and Low alarms threshold
Programmable cut-off frequency (Anti-aliasing filter)	1– 100 Hz
Power Mode	Sleep Active (not available on XT version, External power supply)

TECHNICAL SPECIFICATIONS

RF SPECIFICATIONS

Wireless Protocol Stack	Ultra-Power and license-free 2.4Ghz radio technology (IEEE 802.15.4E)
WSN Topology	Point-to-Point / Star
Data rate	250 Kbits/s
RF Characteristics	ISM 2.4GHz – 16 Channels. Antenna diversity designed by Beanair®
TX Power	+18 dBm
Receiver Sensitivity	-104dBm
Maximum Radio Range	650m (Line of Sight) , 30-100m (Non Line of Sight)
Antenna	Omnidirectional radome antenna with antenna diversity Gain : 3 dBi Waterproof IP67

EMBEDDED DATA LOGGER

Storage capacity	up to 1 millions data points
Wireless data downloading	3 minutes to download the full memory (average time)

TIMESYNC FUNCTION : CLOCK SYNCHRONIZATION OVER THE WIRELESS SENSOR NETWORKS (WSN)

Clock synchronization accuracy	±2.5 ms (at 25°C)
Crystal specifications	Tolerance ±10ppm, stability ±10ppm

ENVIRONMENTAL AND MECHANICAL

Casing	Aluminum & Waterproof casing Dimensions in mm (LxWxH): 100x55x21 mm Weight (battery included) : 155g
IP NEMA Rating	IP67 Nema 6
Shock resistance	100g during 50 ms
Operating Temperature	-20 °C to +65 °C
Norms & Radio Certifications	<ul style="list-style-type: none"> · CE Labelling Directive R&TTE (Radio) ETSI EN 300 328 · FCC (North America) · ARIB STD-T66 Ver 3.6 · ROHS - Directive 2002/95/EC

TECHNICAL SPECIFICATIONS


POWER SUPPLY

Integrated battery charger	Integrated Lithium-ion battery charger with high precision battery monitoring : · Overvoltage Protection, Overcurrent/Short-Circuit Protection, Undervoltage Protection · Battery Temperature monitoring
Current consumption @3,3V	· During data acquisition : 30 to 40 mA · During Radio transmission : 80 mA @ 18 dBm · During sleeping : < 38 µA
External power supply	8-28VDC
Rechargeable battery	High density Lithium-Ion rechargeable battery with a capacity of 950 mAh

OPTION(S)

External Power Supply	Wall plug-in, Switchmode power Supply 12V @ 1,25A with sealed M8 Plug (IP67/Nema 6) Ref: M8-PWR-12V
Solar Panel Kit (compatible with External Power Supply version only)	High efficiency solar panel with Solar charging controller and Lead-acid battery Ref: X-SOL-5W-M8-2M
External Primary Cell in a Waterproof IP67 Casing	External Primary cell mounted in a IP67 aluminum Alloy casing: IP67 Battery Holder Lithium-thionyl chloride primary cell (Li-SOCl ₂) 6,5 Ah Ref: PRIM-XTENDER
M8 extension cable for external power supply	Molded cable with M8-3pins male plug Material: PVC with shield protection IP Rating : IP67 Nema 6 Cable length: 2 meters , Ref: CBL-M8-2M Cable length : 5 meters, Ref: CBL-M8-5M Cable length: 10 meters, Ref: CBL-M8-10M
Calibration certificate	Calibration certificate provided by Beanair GmbH A static calibration method is used on a granite surface plate DIN876

GETTING STARTED WITH A WIRELESS IIOT SENSORS

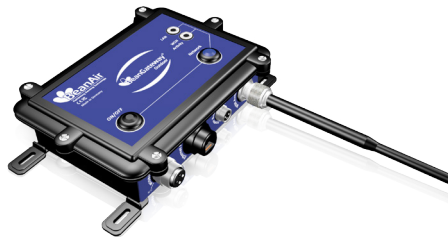

The **BeanDevice® 2.4GHz INC** operates only on our Wireless IIOT Sensors, you will need the **BeanGateway® 2.4GHz** and the **BeanScope® 2.4GHz** for starting a wireless IIOT sensors.



For further information about **BeanDevice®** battery life :
 TN-RF-002 Current consumption in active & sleeping mode
 TN-RF-012 Beandevic autonomy in Streaming and Streaming Packet Mode

BEANDEVICE® 2.4GHz INC FRONT VIEW

Waterproof Antenna

Battery charge led


Network Reset
non-contact push button



Network led

ON/OFF
non-contact button

M8 Socket for power
supply (8-28 VDC)

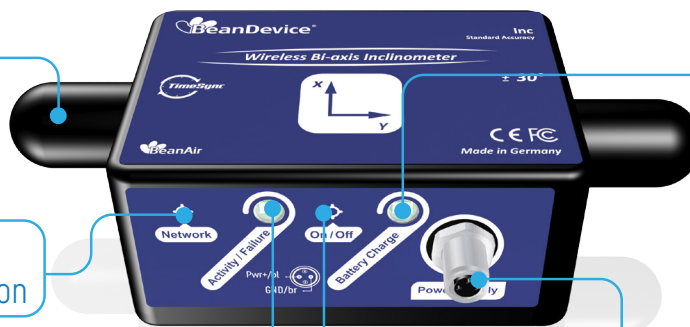

Product specifications are subject to change without notice.
 Contact Beanair for latest specifications.

OPTIONS AND ACCESSORIES

External Primary cell

Ref: PRIM_XTEND

PRIM XTENDER - Extend your Beandevic battery autonomy External Primary cell mounted in a IP67 Alloy casing:

- . IP67 Battery Holder
- . Alloy Casing
- . Lithium-thionyl chloride primary cell (Li-SOCI2) 6,5 Ah



AC/DC Power supply with M8 Plug

Ref: M8-PWR-12V

- Wall plug-in power supply, Output: 12VDC, M8-3Pins plug
- AC Power plug: Europe/UK/Northamerica/China Australia
- Waterproof - IP67



Molded Cable with M8 plug

Ref: CBL-M8-2M

[cable length : 2 meters]

- CBL-M8-5M

[cable length : 5 meters]

- CBL-M8-10M

[cable length : 10 meters]



High efficiency Solar Panel with Solar Charging Controller and Lead-acid battery

X-SOLAR

[SOLAR Charging Controller]

CONTACT US

Headquarter:

Email:

Phone number:

BeanAir GmbH
Wolfener Straße 32 - 34
12681 Berlin

info@beanair.com

+49 30 98366680



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm



www.industrial-wsn.com



www.beanair.com



www.youtube.com/user/BeanairSensors



www.facebook.com/BeanAir



www.twitter.com/beanair

