



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

More Precision

thermoMETER // Non-contact infrared temperature sensors





thermoMETER CS

Compact OEM sensor with integrated controller

- Measuring range from -40 °C to 400 °C
- Applicable in ambient temperatures up to 80 °C without cooling
- Robust, silicon-coated lens
- Integrated controller with LED alarm display and intelligent sighting aid, alarm signal, temperature-code display or self-diagnostics
- Protection against short circuit and polarity change
- Programmable controller
- Different outputs: 0-10 V or 0-5 V freely scalable, thermocouple type K, alarm output, digital output
- Optional USB interface and software for programming, direct, serial 9.6 / 115.2 kBaud interface
- Extensive supply voltage range: 5 - 30 VDC
- Best price - ideal for OEM applications
- *Please note: available from 10 pieces*

Optical specifications thermoMETER CS
 =smallest spot size / focal point (mm)

Standard Focus										
SF15	15:1	6.5	11.6	16.6	21.7	26.7	35	43.3	51.6	59.9
distance in mm		0	100	200	300	400	500	600	700	800
Close Focus (with optionally available CF lens)										
CF15	15:1	7	3.9	0.8	4.7	8.6	12.5	16.4	20.3	24.2
distance in mm		0	5	10	15	20	25	30	35	40


Model	CS-SF15-C1	CSTK-SF15-C1
Optical resolution	15:1	
Temperature range ¹⁾	-40 °C to 400 °C	
Spectral range	8 to 14 µm	
System accuracy ²⁾	± 1.5 % or ± 1.5 °C	
Repeatability ²⁾	± 0.75 % or ± 0.75 °C	
Temperature coefficient ³⁾	± 0.05 °C/K or ± 0.05 %/K	
Temperature resolution ⁴⁾	0.05 °C	
Response time	14 ms to 999 s (90 %), adjustable	
Emissivity/Gain	0.100 to 1.100 (adjustable via 0 to 10 VDC input or software)	
Transmissivity/gain	0.100 to 1.100 (adjustable via software)	
Signal processing ¹⁾	Peak hold, valley hold, average; extended hold function with threshold and hysteresis	
Outputs/analog	0 to 5 V or 0 to 10 V, freely scalable via software	0 to 5 V or 0 to 10 V, freely scalable via software additional thermocouple type K
Alarm output	Alarm 0-30 V / 50 mA (open collector)	
3-state alarm output	adjustable thresholds and voltage levels for: no alarm, pre-alarm, alarm	
Outputs/digital	mono-/bidirectional, 9.6 / 115.2 kBaud (adjustable via software), 0/3 V level/USB optional	
LED functions	alarm display, automatic aiming aid, self-diagnostics, temperature display (via temp. code)	
Inputs	programmable functional inputs for external emissivity adjustment, ambient temperature compensation (0 to 10 VDC), hold function or RS232 / USB (optional) communication	
Cable length	1 m (standard), 3 m, 8 m, 15 m	
Power supply	4 mA (without LED); 10 mA (5 to 30 VDC)	
Protection class	IP63 (NEMA-4)	
Ambient temperature	-20 °C to 80 °C	
Storage temperature	-40 °C to 85 °C	
Relative humidity	10 to 95 %, non-condensing	
Vibration	IEC 68-2-6: 3 G, 11 to 200 Hz, any axis	
Shock	IEC 68-2-27: 50 G, 11 ms, any axis	
Weight	approx. 58 g	

¹⁾ Adjustable via software

²⁾ Ambient temperature: 23 ± 5 °C; whichever is greater; object temperature ≥ 0 °C

³⁾ For ambient temperatures < 18 °C and > 28 °C, whichever is greater

⁴⁾ With object temperature < 100 °C and time constant of > 0.2 s



Product identification


CS -	SF15-	C1
		Cable length [1 m (standard) / 3 m / 8 m / 15 m]
		Focus [SF]
		thermoMETER CS / CSTK

Accessories page 54 - 55

- Ancillary CF lens
- Protective window
- Mounting bracket / mounting bolt
- Air purge collar
- Right angle mirror

CSLaser



sensor

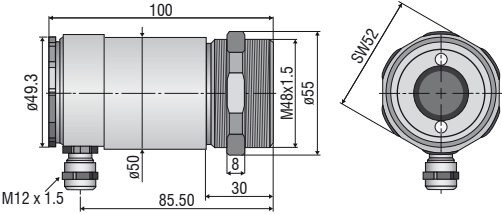

CS

sensor with integrated controller



ancillary CF lens (optional)

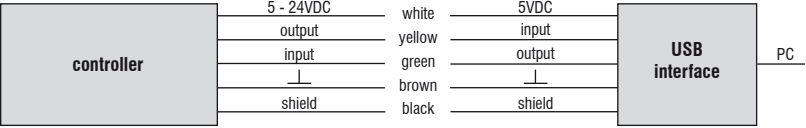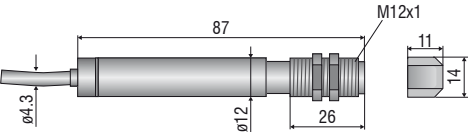


CSmicro / CSmicro 2W

ancillary CF lens (optional)

sensor

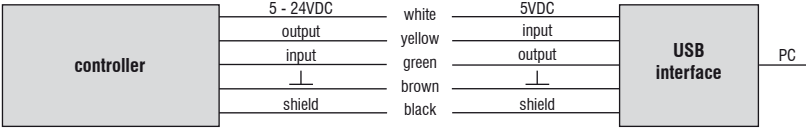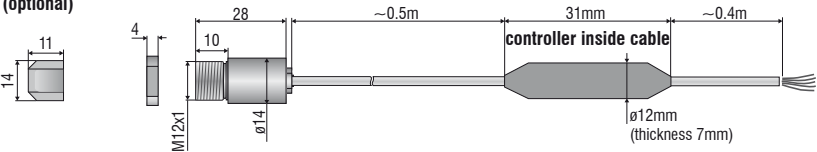

CX

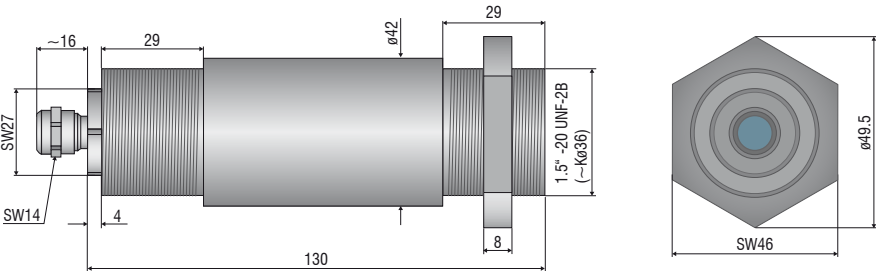

Mechanical accessories CS / CSmicro / CSmicro 2W

Art. No.	Model	
2970279	Emissivity	Mounting bracket, fixed
2970280	TM-AB-CS	Mounting bracket, adjustable
2970281	TM-MB-CS	Mounting bolts with M12x1 thread
2970282	TM-MG-CS	Mounting fork, adjustable in 2 axes, with M12x1 fastening
2970283	TM-AP-CS	Air purge collar for 10:1 sensors
2970284	TM-APL-CS	Air purge collar, laminar
2970285	TM-APLCF-CS	Air purge collar, laminar with integrated ancillary CF lens
2970286	TM-RAM-CS	Right angle mirror for measurements 90 °C to the sensor axis
2970718	TM-USBK-CS	USB kit: USB programming adapter, CompactConnect software (as download)

Optical accessories CS / CSmicro / CSmicro 2W

2970277	TM-CF-CS	Ancillary CF lens for CS models
2970278	Aluminum	Protective window for CS models

Calibration CS / CSmicro / CSmicro 2W

2970288	TM-CERT-CS	Certificate of calibration
---------	------------	----------------------------

Mechanical accessories CX

Art. No.	Model	
2970307	TM-AP-CX	Air purge collar, aluminum (anodized)
2970321	TM-FB-CX	Mounting bracket, adjustable in 1 axis, stainless steel
2970322	TM-AB-CX	Mounting bracket, adjustable, in 2 axes, stainless steel

Optical accessories CX

2970302	TM-CF-CX	Ancillary CF lens for CX models
2970303	TM-PW-CX	Protective window for CX models

Calibration CX

2970323	TM-CERT-CX	Certificate of calibration
---------	------------	----------------------------



TM-FB-CS mounting bracket, fixed



TM-MG-CS Mounting fork with M12x1 thread, adjustable in two axes



TM-CF-CS Ancillary CF lens (only for LT models)



TM-AP-CS Air purge collar for 10:1 sensors



TM-MB-CS Mounting bolts with M12x1 thread adjustable in one axis



TM-APL-CS Air purge collar, laminar



TM-APLCF-CS Air purge collar, laminar with integrated ancillary CF lens



TM-APL-CS Air purge collar, laminar TM-MG-CS Mounting fork



TM-AP-CX Air purge collar for CX sensors



TM-CF-CX Ancillary CF lens, TM-PW-CX Protective window



TM-RAM-CS Right angle mirror

Infrared thermal imagers from Micro-Epsilon



thermoIMAGER TIM Compact thermal imaging cameras for industrial temperature monitoring

- Temperature range from -20 °C to 2450 °C
- Ideal for OEM
- Real-time thermography using license-free software
- Protective housing for harsh environments
- Special variants for the glass, metal and plastics industries