



SCIGATE AUTOMATION (S) PTE LTD

Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6561 0588

Email: sales@scigate.com.sg

Web: <https://scigate.com.sg/>

Business Hours: Monday - Friday 8:30AM - 6:15PM

More Precision

thermoMETER // Non-contact infrared temperature sensors





thermoMETER CTLaserM3

Non-contact IR temperature sensor with laser sighting for metals and composite material processing from 50 °C

- Measuring range 50 °C to 1800 °C
- 2.3 μm measuring wavelength for exact measurement in difficult emissivity conditions
- Response time of 1 ms
- Double laser marks exact spot size from 0.5 mm
- Optical resolution 300:1, 100:1 and 60:1 with selectable focus
- Up to 85 °C ambient temperature without cooling, automatic laser switch-off at 50 °C, up to 315 °C with water cooled housing

Optical specifications thermoMETER CTLaserM3

□ = smallest spot size / focal point (mm)

Standard Focus

3LSF	60:1	20	19.8	19.5	19.3	19.1	18.8	18.6	18.5	18.3	21.8	27	32.2	40.9	56.6
3HSF	100:1	20	18.8	17.5	16.3	15.1	13.9	12.6	11.8	11	13.8	18	22.3	29.3	42
3 H1/H2/H3 SF300	300:1	12	10.9	9.7	8.6	7.5	6.3	5.2	4.5	3.7	5.1	7.3	9.4	13	19.4
distance in mm		0	150	300	450	600	750	900	1000	1100	1200	1350	1500	1750	2200

Close Focus

3LCF1	60:1	20	11.2	1.4	10.2	17.8	30.4	42.9	55.5	80.7	105.9	131.1	156.2	181.4	
3HCF1	100:1	20	11	0.9	9.5	16.9	29.2	41.5	53.8	78.4	102.9	127.5	152.1	176.7	
distance in mm		0	40	85	120	150	200	250	300	400	500	600	700	800	

Close Focus

3LCF2	60:1	20	14.2	8.3	2.5	10	17.5	25	40	55	70	85	100		
3HCF2	100:1	20	13.8	7.7	1.5	8.7	15.8	23	37.3	51.7	66	80.3	94.7		
3 H1/H2/H3 CF2	300:1	12	8.2	4.3	0.5	4.7	8.8	13	21.3	29.7	38	46.3	54.7		
3LCF3	60:1	20	15.8	11.7	7.5	3.3	9.1	15	26.6	38.3	49.9	61.6	73.2		
3HCF3	100:1	20	15.5	11	6.5	2	7.5	13	24	35	46	57	68		
3 H1/H2/H3 CF3	300:1	12	9.2	6.4	3.5	0.7	3.9	7	13.4	19.8	26.1	32.4	38.8		
distance in mm		0	50	100	150	200	250	300	400	500	600	700	800		

Close Focus

3LCF4	60:1	20	18.6	17.2	15.8	14.4	13.1	11.7	10.3	8.9	7.5	10.6	16.7	22.8	28.9
3HCF4	100:1	20	18.3	16.6	14.8	13.1	11.4	9.7	7.9	6.2	4.5	7.2	12.7	18.1	23.6
3 H1/H2/H3 CF4	300:1	12	10.8	9.7	8.5	7.3	6.2	5	3.8	2.7	1.5	3	6	9	12
distance in mm		0	50	100	150	200	250	300	350	400	450	500	600	700	800

Far Field

3 H1/H2/H3 FF	300:1	12	12	12	12	12	12	12	12	12	12	14.7	21.3	28	33
distance in mm		0	450	900	1350	1800	2250	2700	3000	3600	4000	5000	6000	6750	


Model	CTLM-3LSF60-C3	CTLM-3HSF100-C3	CTLM-3H1SF300-C3	CTLM-3H2SF300-C3	CTLM-3H3SF300-C3
Optical resolution	60:1	100:1	300:1		
Temperature range ^{1), 2)}	50 to 400 °C	100 to 600 °C	150 to 1000 °C	200 to 1500 °C	250 to 1800 °C
Spectral range	2.3 µm				
System accuracy ³⁾	±(0.3 % of reading + 2 °C)				
Repeatability ³⁾	±(0.1 % of reading + 1 °C)				
Temperature resolution (digital)	0.1 °C				
Response time (90 % signal) ⁴⁾	1 ms				
Emissivity/gain ¹⁾	0.100 to 1.100				
Transmissivity/gain ¹⁾	0.100 to 1.100				
Signal processing ¹⁾	peak hold, valley hold, average; extended hold function with threshold and hysteresis				
Certificate of calibration	optional				
Outputs/analog	channel 1	0/4 to 20 mA, 0 to 5/10 V, thermocouple J, K			
Outputs/analog	optional	relays: 2 x 60 VDC/42 VAC _{eff} ; 0.4 A; electrically isolated			
Alarm output		open collector (24 V / 50 A)			
Outputs/digital		USB, RS232, RS485, CAN, Profibus DP, Ethernet			
Output impedances	current output	mA max. 500 Ω (with 5 - 36 VDC)			
	voltage output	mV min. 100 kΩ load impedance; thermocouple 20 Ω			
Inputs		programmable functional inputs for external emissivity adjustment ambient temperature compensation, trigger (reset of hold functions)			
Cable length		3 m (standard), 8 m, 15 m			
Power supply		8 to 36 VDC; max. 160 mA			
Laser		class II (635 nm), 1 mW, ON/OFF via controller or software			
Protection class		IP65 (NEMA-4)			
Ambient temperature		sensor: -20 °C to 85 °C (50 °C if Laser ON); controller: 0 °C to 85 °C			
Storage temperature		sensor: -40 °C to 85 °C; controller: -40 °C to 85 °C			
Relative humidity		10 to 95 %, non-condensing			
Vibration	sensor	IEC 68-2-6: 3 G, 11-200 Hz, any axis			
Shock	sensor	IEC 68-2-27: 50 G, 11 ms, any axis			
Weight		sensor: 600 g; controller: 420 g			

¹⁾ adjustable via controller or software

²⁾ target temperature > sensor temperature + 25 °C

³⁾ ε=1, response time 1 s; ambient temperature: 23 ±5 °C

⁴⁾ with dynamic adaption at low signal levels



Product identification

CTLM -	3	L	SF60-	C3
Cable length [3 m (standard) / 8 m / 15 m]				
Focus [SF60/100 / CF1 / CF2 / CF3 / CF4]				
Temperature range [L / H]				
Spectral range [2.3 µm]				
thermoMETER CTLaserM				


Accessories page 20 - 21

- Mounting bracket
- Air purge collar
- Rail mount adapter for controller
- Water cooled housing
- Interface kit
- Certificate of calibration




CTLaser / CTLaserFAST / CTLaserGLASS / CTLaserM1/M2/M3/M5 / CTLaserCOMBUSTION

Controller

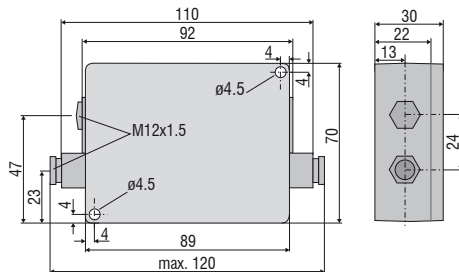


Sensor


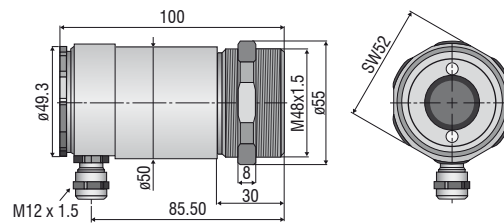


CTRatioM1/M2


Controller

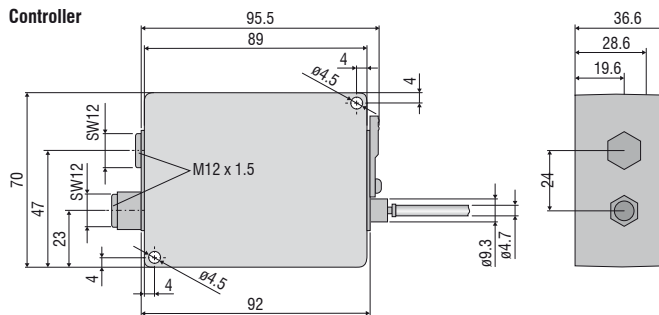

Sensor

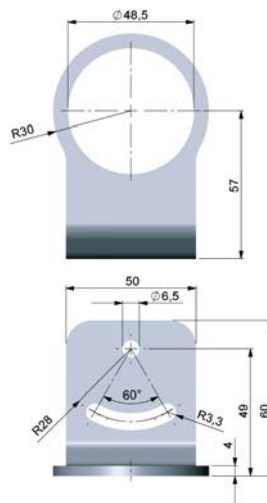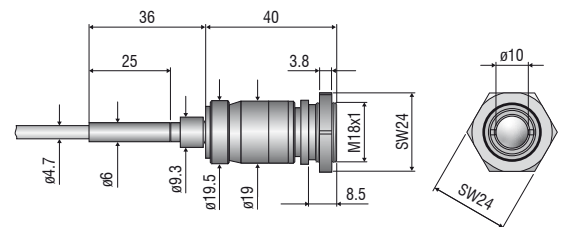


TM-FB-CTL Mounting bracket (fixed);
included in CTL scope of supply

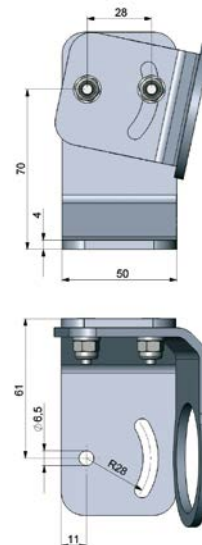

TM-AB-CTL Mounting bracket (adjustable)



TM-W-CTL Water cooled housing and
air purge collar TM-AP-CTL,
mounted on adjustable mounting bracket TM-AB-CTL

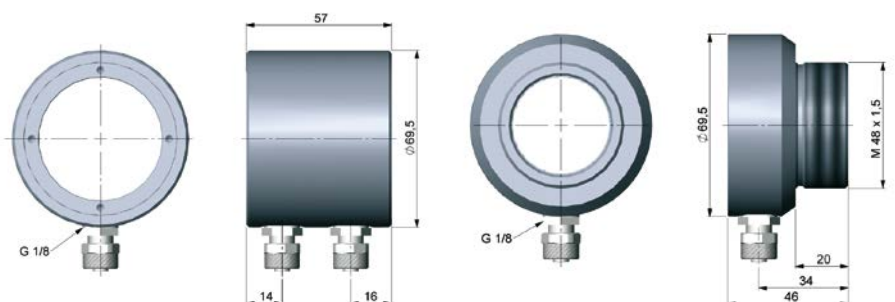

TM-W-CTL Water cooled housing

TM-AP-CTL Air purge collar

Mechanical accessories

Art. No.	Model	
2970238	TM-AB-CTL	Mounting bracket, adjustable, stainless steel
2970239	TM-AP-CTL	Air purge collar, stainless steel
2970240	TM-W-CTL	Water cooled housing, stainless steel, for ambient temperatures up to 175 °C
2970241	TM-RAIL-CTL	Rail mount adapter for CTLaser controller
2970242	TM-COV-CTL	Closed cover for controller
2970243	TM-MN-CTL	Mounting nut, stainless steel (spare)
2970244	TM-FB-CTL	Mounting bracket, fixed, stainless steel (spare)
2970298	TM-A20UN-CTL	Screw adapter M48x1.5 on 20UN-2A screw including mounting nut

High temperature accessories

2970366	TM-J-CTL	Cooling jacket (length 228 mm, ø89 mm) (conversion kit TM-CONK-CTL is required)
2970374	TM-CONK-CTL	Conversion kit for CTL on axial cable exit, for integration in cooling jacket
2970368	TM-JAB-CTL	Adjustable mounting bracket for cooling jacket
2970369	TM-MF-CTL	Mounting flange M48x1.5 for TM-PF-CTL
2970370	TM-AST300-CTL	Reflection protection tube M48x1.5, 300 mm length
2970371	TM-PA-CTL	Pipe adapter M48x1.5
2970372	TM-RM-CTL	Furnace wall mount accessory for CTL (TM-MF-CTL, TM-AST300-CTL and TM-PA-CTL)
2970412	TM-PF-CTL	Pipe flange M48x1.5 for directly mounting a CTL sensor
2970487	TM-CJA-CTL	Cooling Jacket Advanced - universal cooling jacket for CSLaser, CTLaser and CTVideo / CSVideo up to 315 °C

Calibration

2970253	TM-CERT-CTL	Certificate of calibration
2970324	TM-HTCERT-CTL	Certificate of calibration for CTLaser M1-/M2-/M3-/M5-/G-sensors

Interfaces


2970245	TM-USBK-CTL	USB interface, computer cable, CompactConnect software second cable gland for controller
2970246	TM-RS232K-CTL	RS232 interface, computer cable, CompactConnect software, second cable gland for controller
2970338	TM-RS485USBK-CTL	RS485-USB-adapter, incl. PC cable, CompactConnect software and CTmulti, second cable gland for use with interface board TM-RS485B-CTL
2970248	TM-RS485B-CTL	RS485 interface board incl. second cable gland
2970249	TM-CANK-CTL	CAN-Bus interface; protocol: CANopen Presets: module address20 (14H), 250 kBaud, 0-60 °C
2970250	TM-PFBDPK-CTL	Profibus-DPV1 interface with plug-in connection
2970251	TM-ETHNK-CTL	Ethernet-Kit: interface board, external Ethernet adapter, CompactConnect software, second cable gland
2970252	TM-RI-CTL	Relay interface: two electrically isolated relays, 60 VDC/ 42 VAC _{eff} 0.4 A

Sensor cables and high temperature cables for CTLaser

2970374	TM-CONK-CTL	Connector-Kit for cables with connector
4800254.003	TM-CB3C-CTL	Sensor cable with connector (3 m)
4800254.003H	TM-CB3HC-CTL	High-temperature sensor cable (up to 180 °C) with connector (3 m)
4800254.008	TM-CB8C-CTL	Sensor cable with connector (8 m)
4800254.008H	TM-CB8HC-CTL	High-temperature sensor cable (up to 180 °C) with connector (8 m)
4800254.015	TM-CB15C-CTL	Sensor cable with connector (15 m)
4800254.015H	TM-CB15HC-CTL	High-temperature sensor cable (up to 180 °C) with connector (15 m)




TM-J-CTL Cooling jacket (length 228 mm, ø 89 mm) with adjustable mounting bracket TM-JAB-CTL; suitable for ambient temperatures up to 180°C



TM-PF-CTL and TM-MF-CTL mounting flange M48x1.5 for directly mounting a CTL sensor



TM-RM-CTL Furnace wall mount accessory for CTLaser / CTRatio: TM-MF-CTL, TM-PF-CTL, TM-AST300-CTL and TM-PA-CTL

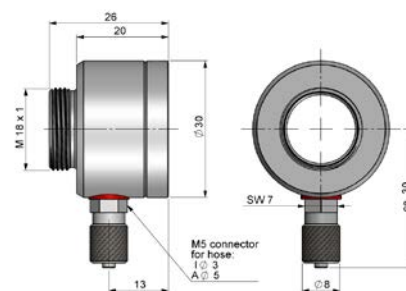

TM-AP-CTR Air purge collar

CTRatio

Art. No.	Model	
2970348	TM-FB-CTR	Mounting bracket, stainless steel, adjustable in one axis
2970395	TM-AP-CTR	Air purge collar, stainless steel
2970373	TM-RM-CTR	Furnace wall mount
2970351	TM-CERT-CTR	Certificate of calibration

Further IR temperature measurement devices from Micro-Epsilon



thermoIMAGER TIM
Compact USB thermal imaging cameras
for precise thermography



thermoMETER CTVideo/CSVideo
Infrared temperature sensors with crosshair
laser sighting and video output



thermoMETER Handheld
Innovative handheld pyrometer with laser
sighting for inspection and maintenance