


Dynamic Orbit[®] Ethernet Interface Module 2.0



- New, lower cost Ethernet Interface Module
- Connect up to 200 Orbit Modules
- **Dynamic Capability** 3906 readings per module per second. (Previous ETHIM models did not have Dynamic capability)
- Requires Orbit Support Pack for Windows 2.0.0 or later

ETHIM 2.0 is used to interface to Orbit Modules.

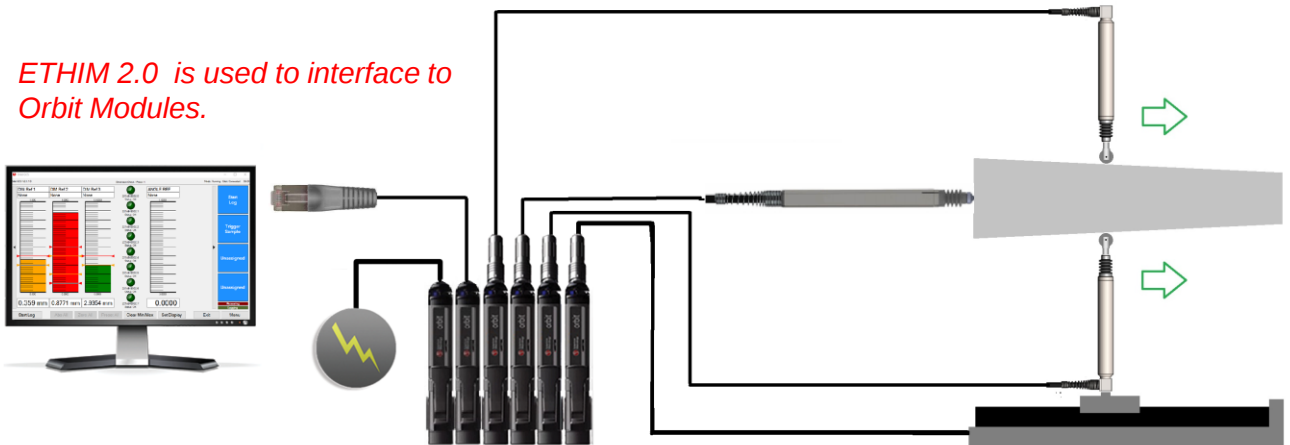

*Encoder Interface
Module*

*Gauging application where taper
is checked dynamically*


Ethernet Interface Module (ETHIM 2.0)

- The New Ethernet Interface Module carries all the same capabilities as an Orbit USB Interface Module, including Dynamic modes.
- Connect over networks and long distances.
- **Dynamic Capability** 3906 readings per module per second.
- Avoid driver issues with USB and Windows



Mode	NEW ETHIM 2.0	Old ETHIM
Network Speed	Low, High, Ultra High	Low, High
Basic	X	X
Difference	X	X
Buffered	X	X
Readburst	X	X
Dynamic	X	
Dynamic 2	X	
Typical Reading Rate (Depends on Network)	1000 to 3000 Readings per second	Up to 1000 Readings per Second

Note Reading rates over Ethernet can be influenced by the quality of the connection and other Ethernet traffic.

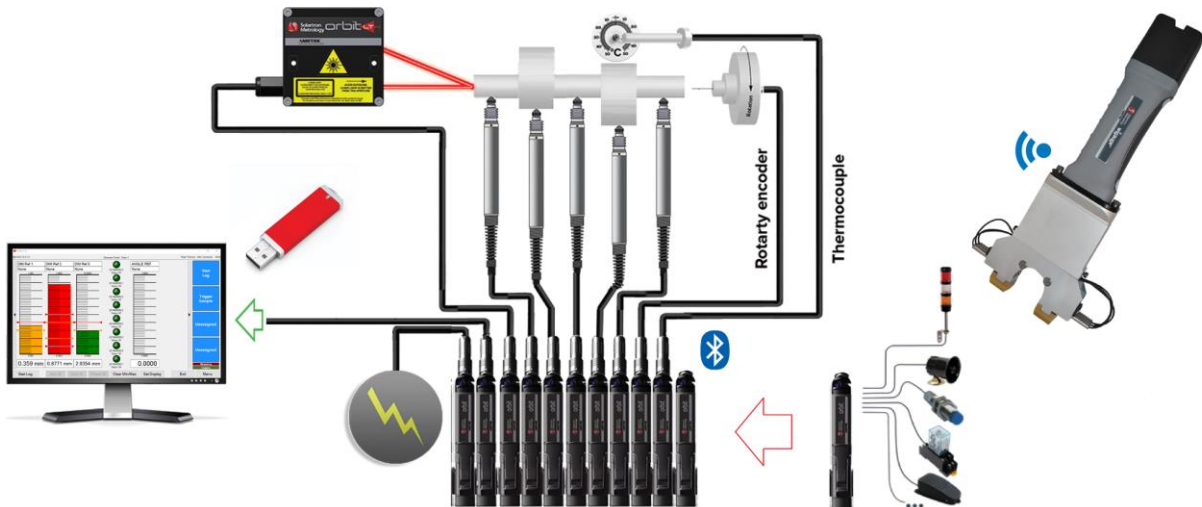

The new ETHIM 2.0 will connect with all Solartron Modules and Sensors

Orbit Modes

- The Orbit Network has three different levels of output speed, and several different reading modes. The new ETHIM 2.0 is capable of reading at all these levels.

ORBIT SPEEDS (For ETHIM 2.0 and USBIM)

- Low Speed: 187.5 kb/s
- High: 1.5 MB/s
- Ultra High: 2.25 MB/s

READING MODES (Consult Orbit 3 Manuals for full details)

- BASIC: Standard Measurement Mode where one module is queried at a time. Slower but simple to set up.
- DYNAMIC: High Speed Synchronized readings for up to 32 modules.
- DYNAMIC 2: High Speed Synchronized readings, for up to 200 modules. Can also be used at Ultra High Speed. ETHIM 2.0 and USBIM Only.
- READBURST: One high speed *synchronized* reading of all modules on network.
- BUFFERED: Mode where up to 3000 readings are stored in module, then extracted on command
- DIFFERENCE MODE: Maximum and Minimum readings, along with difference are stored in module then extracted with command




Module Commands			
Module	526AP04403		Enabled ☒
Read Difference			
Count			
Maximum	11124	Unit	Maximum 2.71582
Minimum	10722		Minimum 2.61768
Sum of	14793775		Sum of 3611.76147
Difference	402		Difference 0.09814
# Reads	1352	Error Msg	No Error
		Enable Disable	


A readout of **Difference Mode**, via the Orbit Library Test Program. Both Maximum and Minimum readings saved.



Static Mode (above) vs. **Read Burst Mode** (below). With Read Burst, readings from all modules sent simultaneously

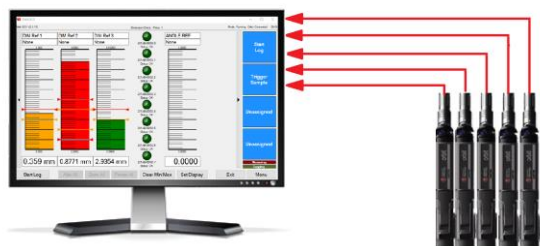

Sample of **Orbit Dynamic 2 Mode**. Readings triggered by Rotary Encoder into Encoder Interface Module. Readings output into computer via ETHIM 2.0.

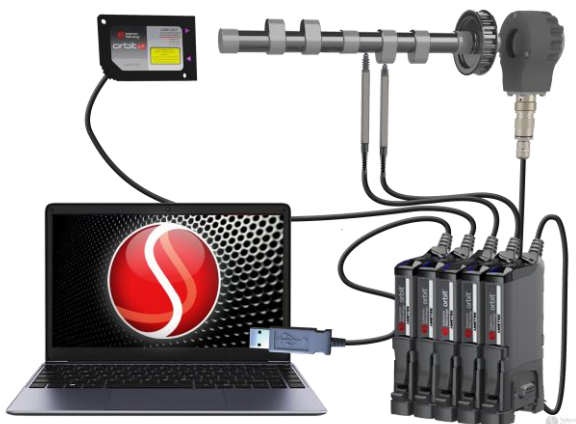


Technical Specifications

Performance		ETHIM 2.0
Interface		Ethernet
Data Rate MBps		10/100
No of Modules		200
Orbit Measurement Modes		All
Readings per second		3906
Nominal Power Requirement mA@ 5V (no load)		200 (Note 2)
Cable length (m) (Note 1)		2
Connector		RJ45 Male
Environmental		
Sealing		IP43
Storage Temperature (°C)		-20 to 70
Operating Temperature (°C)		0 to 60
EMC (Immunity)		(BS) EN 61000-6-2:2005
EMC (Emissions)		(BS) EN61000-6-3:2007/A1:2011
EMC (Immunity/Emissions)		(BS) EN61326-1:2013

Note1: Unit supplied with adapter to facilitate adding Ethernet extension cable if required).

Note 2: The Ethim requires +5V dc power supply to operate and does not provide any power for other Orbit Modules. A PSIM is required.

Dimensions ETHIM

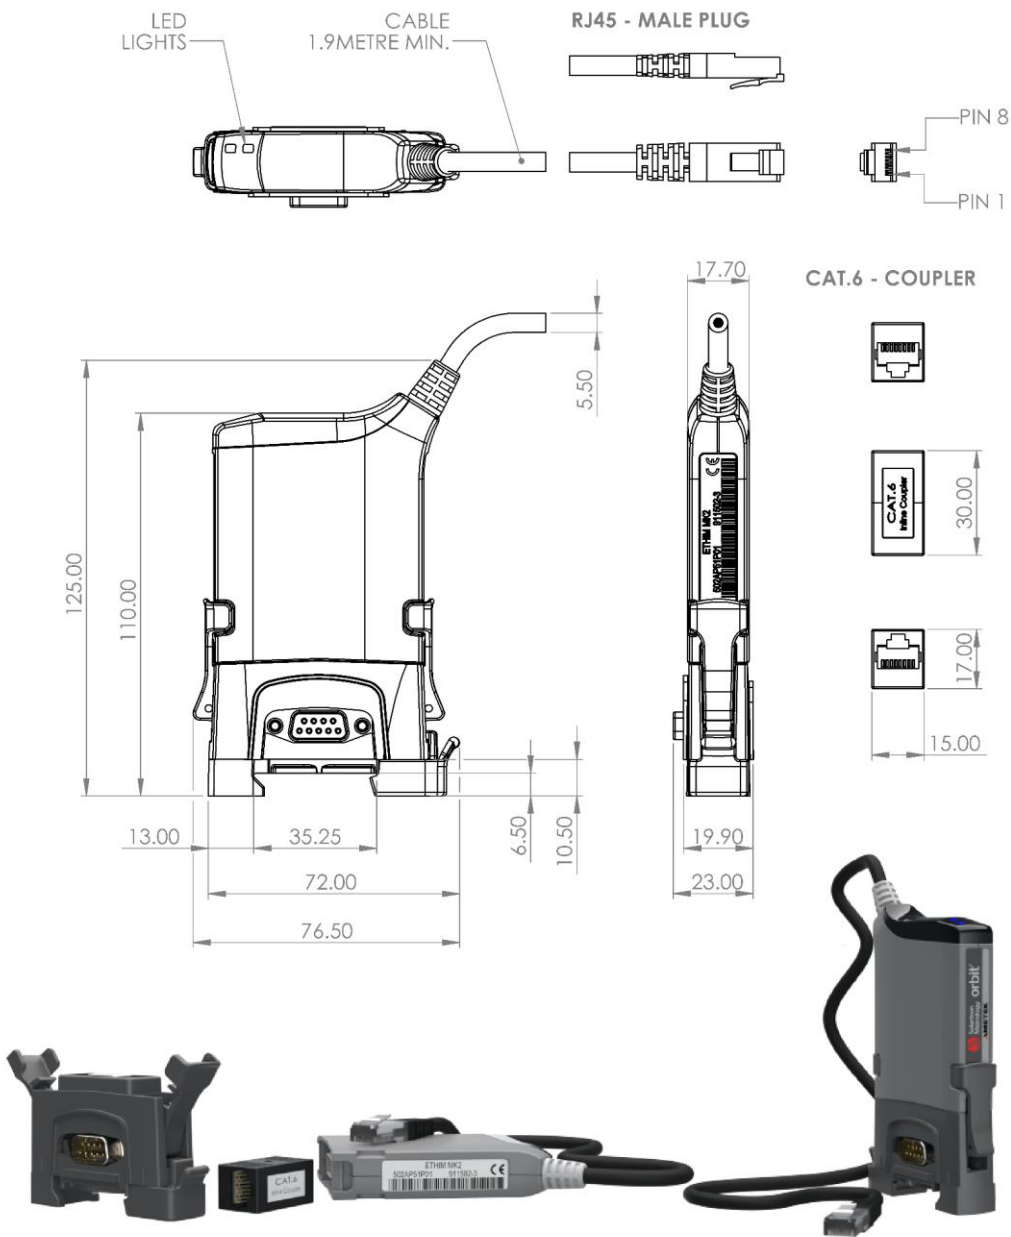

 STEYNING WAY • BOGNOR REGIS • SUSSEX • ENGLAND • PO22 9ST	DRAWING NUMBER	TITLE	E.D.C.R.	TBA
	540002-206	ETHIM MK2	ISSUE	A
SOLARTRON PURSUES A POLICY OF CONTINUOUS DEVELOPMENT. SPECIFICATIONS IN THIS DOCUMENT MAY THEREFORE BE CHANGED WITHOUT NOTICE. DIMENSIONS ARE NOMINAL AND SPECIFIED IN MILLIMETRES				

WorldWide Sales Offices



UK Head Office and Factory

Solartron Metrology
Steyning Way
Bognor Regis
West Sussex
UK, PO22 9ST
Tel: +44 (0) 1243 833333
Fax: +44 (0) 1243 833332
Email: sales.solartronmetrology@ametek.com

France

Ametek SAS
Solartron Metrology Division
Rond point de l'épine des champs
Buroplus Bat D
Elancourt
78990
France
Tel: +33 (0) 1 30 68 89 50
Fax: +33 (0) 1 30 68 89 99
Email: info.solartronmetrology@ametek.fr

Germany

Ametek GmbH
Solartron Metrology Division
Rudolf-Diesel-Strasse 16
40670 Meerbusch
Tel: +49 (0) 2159 9136 500
Fax: +49 (0) 2159 9136 505
Email: vertrieb.solartron@ametek.com

China

Ametek Commercial Enterprise (Shanghai)
Co., Ltd Part A1, A4 2nd Floor
Building No 1, No 526 Fute
3rd Road East
Shanghai
Pilot Free Trade Zone
200131
China
Tel: +86 21 5763 2509
Fax: +86 21 5866 0969 Ext. 261/262
Email: china.solartronmetrology@ametek.com

USA

Solartron Metrology
915 N. New Hope Road, Suite C
Gastonia, NC 28054
Tel: +1 800 873 5838
Email: usasales.solartronmetrology@ametek.com

Japan

Ametek-Japan
Solartron Metrology Division
Tokyo Office
Shiba NBF Tower (1F, 3F)
1-1-30, Shiba Diamon Minato-Ku, Tokyo, Japan
(P.C.105-0012)
Tel: +81 03-4520-6654
Email: Mamoru.hasegawa@ametek.com

Thailand

Ametek - Thailand
Solartron Metrology Division
No. 89/45 Moo. 15 Enterprise park
Bangna-trad road, Bangkaew, Bangplee
Samutprakarn, Thailand, 10540
Tel: +66 2 012 7500
Mobile: +66 92 087 9222
Email: hidenao.tanaka@ametek.com

Solartron Metrology also carries
an extensive network of sales
agents in all major countries.
For a local contact, go to
www.solartronmetrology.com/contact or email at
sales.solartronmetrology@ametek.com



SCIGATE AUTOMATION (S) PTE LTD
No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm