


HANDHELD DIGITAL MANOMETER


PG-100B

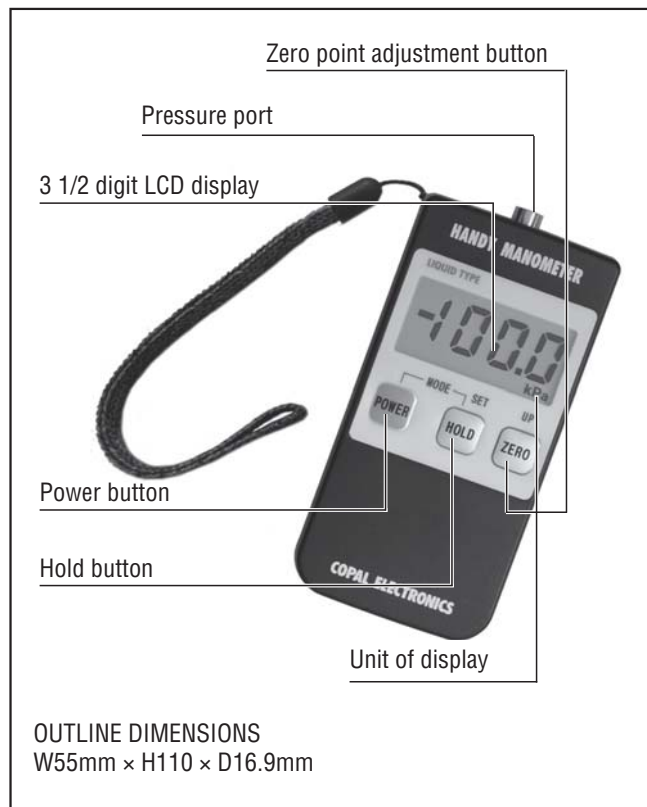

FEATURES

- **New lineup of PG-100 series for measuring gas and liquid pressure**
- **Capable of measuring Absolute pressure (PG-100B-102A)**
- **Excellent stability**
High precision semiconductor chip combined with temperature compensation circuit guarantee excellent stability.
- **Long battery life**
Lasts more than 1000hrs with two AAA dry batteries.
- **Automatic power off function**
- **Easy, one-handed operation**
- **Easy-to-read large LCD display**
- **Pressure unit selectable type also available (PG-100B-****-W).**

MODEL NUMBER DESIGNATION

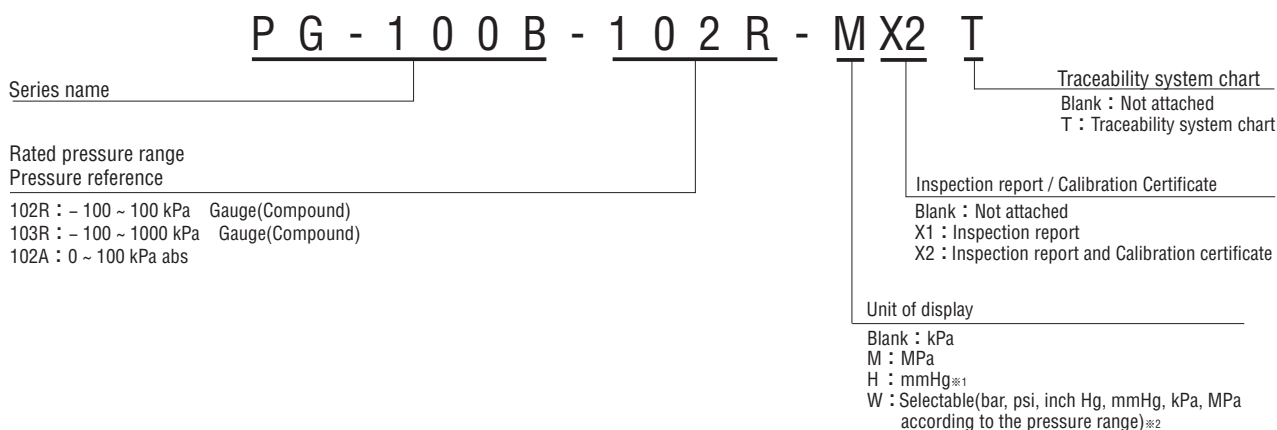

LIST OF MODEL NUMBERS

Pressure reference	Gauge(Compound)		Absolute
Rated pressure range (kPa)	-100 ~ 100	-100 ~ 1000	0 ~ 100 (abs)
kPa	PG-100B-102R- ***	PG-100B-103R- ***	PG-100B-102A- ***
MPa		PG-100B-103R-M **	
mmHg	PG-100B-102R-H **		
Selectable	PG-100B-102R-W **	PG-100B-103R-W **	PG-100B-102A-W ***

PG-100B

HANDHELD DIGITAL MANOMETER

STANDARD SPECIFICATIONS

<kPa version>

● Unless otherwise specified, the specs are defined at an ambient temperature of 25 ± 5 °C.

Item		PG-100B			
General specifications	Pressure reference	Gauge		Absolute	
	Model number	102R	103R	102A	
	Rated pressure range	kPa	- 100 ~ 100	- 100 ~ 1000	0 ~ 100 kPa abs
	Maximum pressure	kPa	200	2000	200 kPa abs
	Break-down pressure	kPa	300	3000	300 kPa abs
	Operating temp. range	°C	0 ~ 50		
	Compensated temp. range	°C	0 ~ 50		
	Operating humidity	% RH	15 ~ 85 (No condensation)		
	Storage temp.	°C	- 20 ~ 70 (Atmospheric pressure, humidity 65 %RH maximum)		
	Pressure medium		Gases/liquids compatible with SUS316L		
	Pressure port		M 5 female		
	Net weight	g	Approx. 100		
	Power		AAA dry battery DC 1.5 V × 2 Battery life 1000 h minimum		
Display	No. of digits	3 1/2			
	Display element	LCD			
	Rated display range	- 100.0 ~ 100.0	- 100 ~ 1000 - 100 ~ 1.000 (MPa)	00.0 ~ 100.0	
	Display cycle	Approx. 4 times/s			
	Integrated accuracy	± 0.5 %F.S. ± 2 digits (at 25 °C ± 5 °C)			
		± 1.0 %F.S. ± 2 digits (at 25 °C ± 25 °C)	± 2.0 %F.S. ± 2 digits (at 25 °C ± 25 °C)		
	Resolution	1 digit			
Analog output	Power supply (External supply)	5 \pm 0.5 V DC 5 mA maximum			
	Output voltage	0 ~ ± 1.000 V ※ Proportionate to display value			
	Output accuracy / Resolution	± 10 mV / 1mV			
	Output resistance	Approx. 10 k Ω			
	Response	Approx. 10 ms			
Additional function	Additional function	Auto power off, Display hold, Battery replacement display(LOBAT), Zero point adjustment			
	Accessories	Fitting (half union for 6mm OD tube), 2 AAA batteries, strap, protective cover			
	Option (Sold seperately)	PG-100B soft carrying case			

PG-100B

HANDHELD DIGITAL MANOMETER

STANDARD SPECIFICATIONS

<Non SI unit version>

● Unless otherwise specified, the specs are defined at an ambient temperature of 25 ± 5 °C.

Item		PG-100B
General specifications	Pressure reference	Gauge
	Model number(mmHg display : compound)	102R-H
	Rated pressure range kPa (mmHg)	- 100 ~ 100 (- 750 ~ 750)
	Maximum pressure kPa (mmHg)	200 (1500)
	Break-down pressure kPa (mmHg)	300 (2250)
	Operating temp. range	°C 0 ~ 50
	Compensated temp. range	°C 0 ~ 50
	Operating humidity	% RH 35 ~ 85 (No condensation)
	Storage temp.	°C - 20 ~ 70 (Atmospheric pressure, humidity 65 %RH maximum)
	Pressure medium	Gases/liquids compatible with SUS316L
	Pressure port	M 5 female
	Net weight	g Approx. 100
	Power	AAA dry battery DC 1.5 V × 2 Battery life 1000 h minimum
Display	No. of digits	3 1/2
	Display element	LCD
	Rated display range(mmHg display)	- 750 ~ 750
	Display cycle	Approx. 4 times/s
	Integrated accuracy	± 0.5 %F.S. ± 2 digits (at 25 °C ± 5 °C)
		± 1.0 %F.S. ± 2 digits (at 25 °C ± 25 °C)
Resolution	1 digit	
Analog output	Power supply (External supply)	5 ± 0.5 V DC 5 mA maximum
	Output voltage	$0 \sim \pm 1.000$ V ※ Proportionate to display value
	Output accuracy / Resolution	± 10 mV / 1 mV
	Output resistance	Approx. 10 kΩ
	Response	Approx. 10 ms
Additional function	Additional function	Auto power off , Display hold, Battery replacement display(LOBAT), Zero point adjustment
	Accessories	Fitting (half union for 6mm OD tube), 2 AAA batteries, strap, protective cover
	Option (Sold seperately)	PG-100B soft carrying case

PG-100B HANDHELD DIGITAL MANOMETER

ENVIRONMENTAL CHARACTERISTICS

Test item	Test conditions (At 25 ± 5 °C)	Permissible change
Vibration	Amplitude 1.5 mm P-P, 10 ~ 55 Hz, 3 directions for 2 hours each (packed)	Indicating accuracy: ± 1 %F.S. maximum
Shock	98.1 m/s ² , 3 directions for 3 times each (packed)	
Pressure cycling	0 ~ Rated pressure, 10 ⁶ cycles	
Moisture resistance	40 °C, 90 ~ 95 %RH, 240 hrs.	

OUTLINE DIMENSIONS

Unless otherwise specified, tolerance : ± 0.5 (Unit: mm)

