
FUTEK MODEL LTH500

CUSTOM DONUT/ THRU HOLE LOAD CELL, CRYOGENIC VERSION

NON LOADING SURFACE


DO NOT CONTACT


STOCK NUMBER: QSH01501




+Excitation -Excitation +Signal -Signal BLACK **GREEN** RED WHITE

Shield Floating

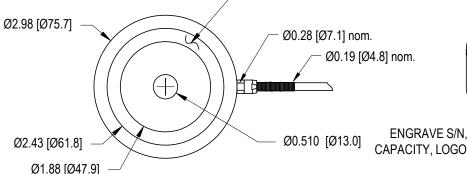

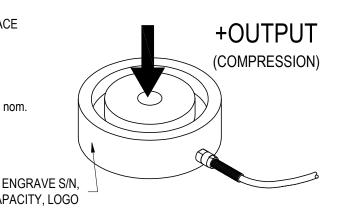

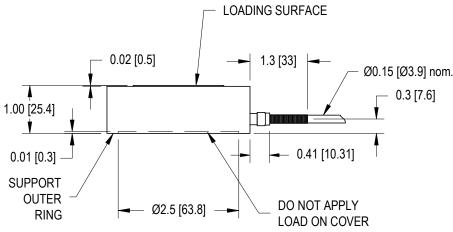

SPECIFICATIONS:

RATED OUTPUT 2 mV/V nom. CAPACITY 15000 lbs [66720 N] SAFE OVERLOAD 150% of R.O. ZERO BALANCE ±3% of R.O. EXCITATION (VDC OR VAC) 18 MAX **BRIDGE RESISTANCE** 700 Ω nom **NONLINEARITY** ±5% of R.O. **HYSTERESIS** ±5% of R.O. **NONREPEATABILITY** ±0.5% of R.O.

±0.005% of R.O./°F [0.01% of R.O./°C] TEMP. SHIFT ZERO ±0.005% of LOAD/°F [0.01% of LOAD/°C] TEMP. SHIFT SPAN

COMPENSATED TEMP. -148 to 302°F (-100 to 150°C) OPERATING TEMP. -148 to 302°F [-100 to 150°C] WEIGHT 26 oz [737 g]

MATERIAL 15-5PH S.S.

CABLE: #24 AWG, 4 Conductor, Spiral Shielded Teflon Cable 10 ft [3 m] Long

NOTE:

WHILE TORQUING BOLTS, HIGH TENSION FORCES WILL OCCUR DURING INSTALLATION, WHICH COULD RESULT IN OVERLOADING THE SENSOR. FUTEK RECOMMENDS CONNECTING SENSOR TO A SYSTEM IN ORDER TO MONITOR THE APPLIED FORCES. FUTEK IS NOT LIABLE OR RESPONSIBLE FOR THE MISHANDLING OF THE SENSOR DURING INSTALLATION.





SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592 Tel: (65) 6561 0488 Email: sales@scigate.com.sg

Fax: (65) 6562 0588 Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

CUSTOMER APPROVAL-COMPANY

TLINE DRAWING

CUSTOMER APPROVAL-NAME /DATE

3rd ANGLE PROJ.

- · ALL DIMENSIONS ARE IN INCHES
- DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M • REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
- THREADS PER HANDBOOK H-28
- DIMENSIONS ARE SHOWN AFTER **PLATING**

ANGLE: ±1/2°

CHAMFER: ±5°

TOLERANCE: $.X \pm 0.1$ XX ±0.01 XXX ±0.005

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written

ADVANCED SENSOR TECHNOLOGY, INC.

10 THOMAS IRVINE. CA 92618 USA Phone: (949) 465-0900 Fax: (949) 465-0905

CAGE: 1X8M6

APPROVED BY: R. WALKER

DWG No.: FO1292 .TH500-SP

DRAWN BY: E, PANO CHECKED BY:

DATE: Mar. 10, 2011

REVISIONS: (Refer to dwg # revision sheet)